





Electro-proportional, direct-acting, pressure reducing/relieving valve with open transition

Capacity:
5 gpm (20
L/min.)
Model:
PRDL

Product Description

This electro-proportional, direct-acting reducer/reliever valve reduces a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, with a full flow relief function from port 1 to tank (port 3). The valve is biased to the relieving mode. Energizing the coil connects port 2 to port 1. Increasing the current to the coil will proportionally increase the reduced pressure at port 1. If pressure at port 1 exceeds the setting induced by the coil, pressure at port 1 is relieved to port 3. This valve is open in the transition from reducing to relieving. It provides good pressure control and dynamic response. Optional full manual control is available.


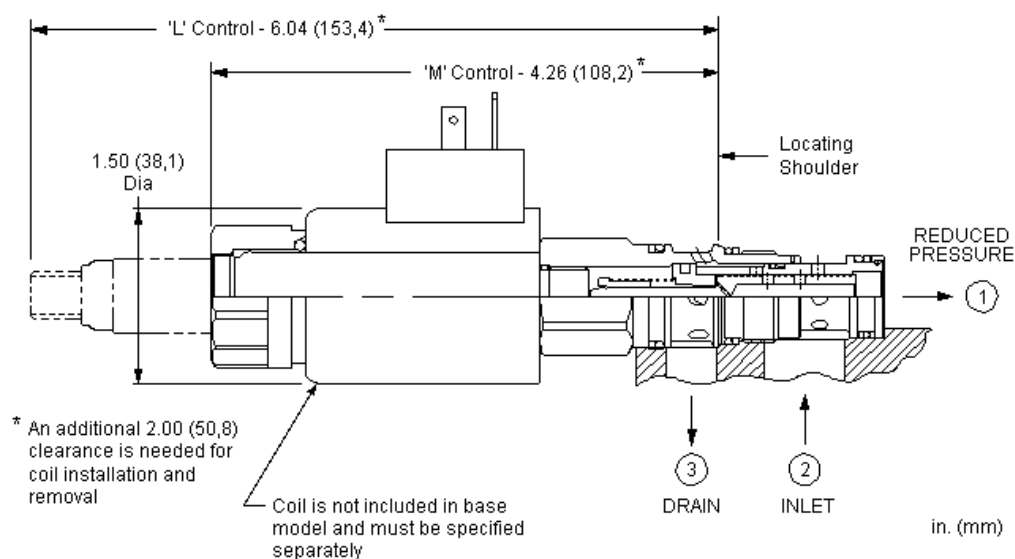



Technical Features

- Maximum pressure at port 3 should be limited to 3000 psi (210 bar).
- Pressure at port 3 is directly additive to the valve setting at a 1:1 ratio and should not exceed 3000 psi (210 bar).
- The transition from reducing to relieving is slightly open. The result is very good pressure control with oil consumption of about 0.1 gpm (0,4 L/min.).
- For optimum performance, an amplifier with current sensing and adjustable dither should be used. Dither should be adjustable between 100 - 250 Hz.
- Direct acting concept provides highly reliable operation in contaminated systems, especially at dead headed conditions.
- All three-port pressure reducing and reducing/relieving cartridges are physically interchangeable (i.e. same flow path, same cavity for a given frame size). When considering mounting configurations, it is sometimes recommended that a full capacity return line (port 3) be used with reducing/relieving cartridges.
- Full reverse flow from reduced pressure (port 1) to inlet (port 2) may cause the main spool to close. If reverse free flow is required in the circuit, consider adding a separate check valve to the circuit.
- NOTE: There is no upper limit to the pressure setting when using the M control. The more force you exert on the manual override, the higher the resulting pressure.
- Uses for the 'L and K' manual screw adjustment include: emergency valve setting during power failure or alternatively boosting the valve setting
- With the 'L and K' adjustment screw, all ranges are factory set at zero (adjustment screw fully backed out). With the coil de-energized, clockwise adjustment of the screw will increase the spring bias load up to the maximum setting for that range. With the coil energized, any mechanical pressure setting is directly additive to the coil induced value.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-11A	
Capacity	5 gpm	20 L/min.
Hysteresis (with dither)	<4%	
Hysteresis with DC input	<8%	
Linearity (with dither)	<2%	
Repeatability (with dither)	<2%	
Recommended dither frequency	140 Hz	
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	20 in ³ /min.	0,33 L/min.
Series (from Cavity)	Series 1	
Adjustment - Number of Clockwise Turns to Increase Setting	5	
Solenoid Tube Diameter	.75 in.	19 mm
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	40 - 50 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm
Model Weight (with coil)	1.20 lb	0,55 kg
Seal Kits - Cartridge	Buna: 990-511-007	
Seal Kits - Cartridge	Viton: 990-511-006	
Seal Kits - Coil	Viton: 990-770-006	
Model Weight	0.72 lb.	0.33 kg.

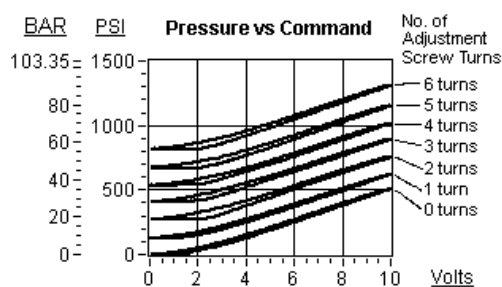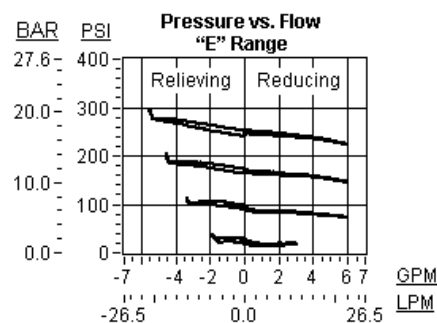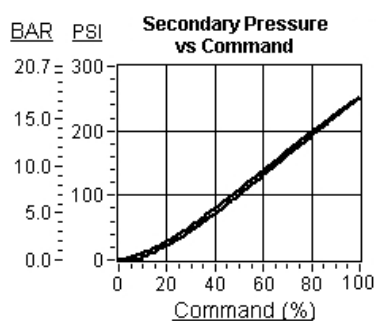

PRDL-MDN-***

Control

Preferred Options

M Manual Override (Standard)
Standard Options

E Twist Manual Override

K Handknob

Operating Range

Preferred Options

D 50 - 500 psi (3,5 - 35 bar)
E 25 - 250 psi (1,7 - 18 bar)
Standard Options

B 100 - 1200 psi (7 - 80 bar)

Seal Material

Preferred Options

N Buna-N
Standard Options

V Viton





Coil

*** See Coil Options Below

L Standard Screw Adjustment S 10 - 100 psi (0,7 - 7 bar)

X No Manual Override

Standard Coil Options

					
AMP Junior Timer	Deutsch DT04-2P	DIN 43650 4 pin (Hirschman)	Metri-Pack	SAE J858A	Twin Lead

*** no coil

212 DIN 43650 4 pin
(Hirschman) 12 VDC224 DIN 43650 4 pin
(Hirschman) 24 VDC

524 SAE J858A 24 VDC

612 AMP Junior Timer 12 VDC

624 AMP Junior Timer 24 VDC

712 Twin Lead 12 VDC

724 Twin Lead 24 VDC

812 Metri-Pack 12 VDC

824 Metri-Pack 24 VDC

912 Deutsch DT04-2P 12 VDC

924 Deutsch DT04-2P 24 VDC

Embedded Coil Options ([Click Here](#))2B12A DIN 43650 4 pin
(Hirschman) command
common on fourth pin 12
VDC 0-20 mA2B12V DIN 43650 4 pin
(Hirschman) command
common on fourth pin 12
VDC 0-10V2B24A DIN 43650 4 pin
(Hirschman) command
common on fourth pin 24
VDC 0-20 mA2B24V DIN 43650 4 pin
(Hirschman) command
common on fourth pin 24
VDC 0-10V2C12A DIN 43650 4 pin
(Hirschman) +5V reference
on fourth pin 12 VDC 0-20
mA2C12V DIN 43650 4 pin
(Hirschman) +5V reference
on fourth pin 12 VDC 0-10V2C24A DIN 43650 4 pin
(Hirschman) +5V reference
on fourth pin 24 VDC 0-20
mA2C24V DIN 43650 4 pin
(Hirschman) +5V reference
on fourth pin 24 VDC 0-10V2D12A DIN 43650 4 pin
(Hirschman) enable input on
fourth pin 12 VDC 0-20 mA2D12V DIN 43650 4 pin
(Hirschman) enable input on
fourth pin 12 VDC 0-10V2D24A DIN 43650 4 pin
(Hirschman) enable input on
fourth pin 24 VDC 0-20 mA2D24V DIN 43650 4 pin
(Hirschman) enable input on
fourth pin 24 VDC 0-10V2F12V DIN 43650 4 pin
(Hirschman) programmable
ramps, separate rise and fall
12 VDC 0-10V2F24V DIN 43650 4 pin
(Hirschman) programmable
ramps, separate rise and fall
24 VDC 0-10V4A12A Deutsch DT04-6P all
functions enabled (separate
command common, 5 v
reference, and an enable) 12
VDC 0-20 mA4A12V Deutsch DT04-6P all
functions enabled (separate
command common, 5 v
reference, and an enable) 12
VDC 0-10V4A24A Deutsch DT04-6P all
functions enabled (separate
command common, 5 v
reference, and an enable) 24
VDC 0-20 mA4A24V Deutsch DT04-6P all
functions enabled (separate
command common, 5 v
reference, and an enable) 24
VDC 0-10V4F12V Deutsch DT04-6P
programmable ramps,
separate rise and fall 12
VDC 0-10V4F24V Deutsch DT04-6P
programmable ramps,
separate rise and fall 24
VDC 0-10V**Additional Options ([Click Here](#))****Additional Coils**

512 SAE J858A 12 VDC

Customer specified setting stamped on hex.