
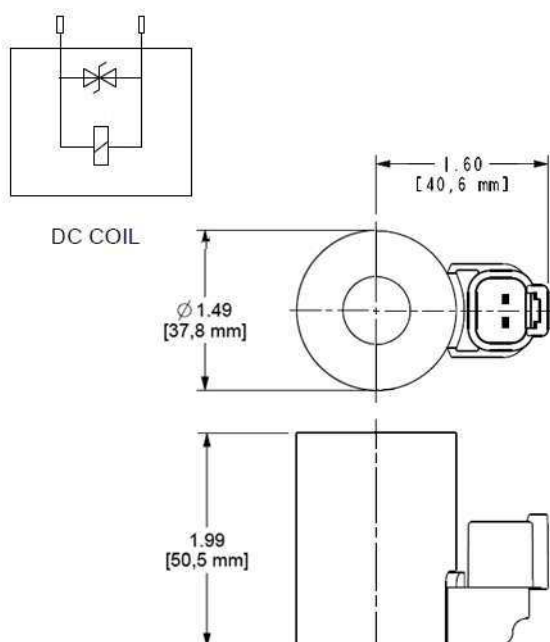




This adapter cable is used to convert Sun's FLeX Series coil with Deutsch connector to Metri-Pack Series 150-2M.

## TECHNICAL DATA

|                                             |                 |
|---------------------------------------------|-----------------|
| Operating Temperature Range                 | -30 to 110 °C   |
| Arc Suppression (TVS)                       | Standard        |
| Power Consumption (cold) - at rated voltage | 25 Watts        |
| Maximum Ambient Temperature                 | 50 °C           |
| Voltage/Frequency                           | 28 VDC          |
| Operating Voltage Range                     | +10%/-15%       |
| Duty Cycle Rating                           | 100 %           |
| Connector                                   | Deutsch DT04-2P |
| Coil Nut Torque                             | 0,5 Nm          |

## USED WITH

|           |           |           |           |           |        |        |      |           |           |
|-----------|-----------|-----------|-----------|-----------|--------|--------|------|-----------|-----------|
| DFBF      | DFBG      | DTAF      | DTBF      | FPBF      | FPBG   | FPBI   | FPBJ | 991711300 | 991711600 |
| 991712300 | 991712600 | 991713030 | 991713060 | 991740001 | XMD-01 | XMD-02 |      |           |           |