
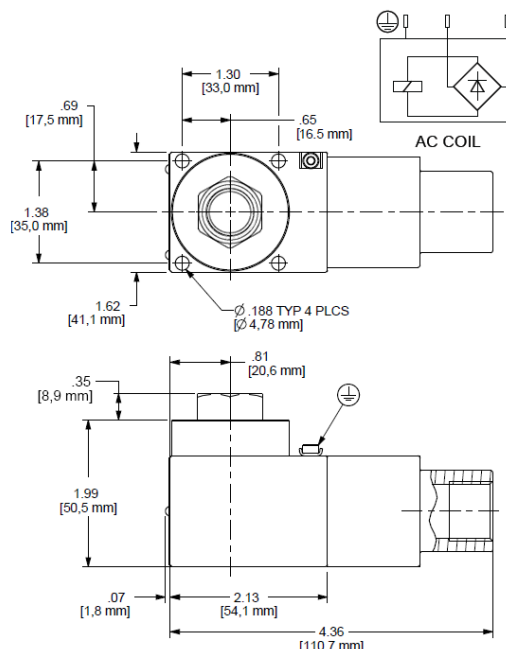




Model 747 Series, hazardous location coils are designed for Sun's FLeX Series switching and proportional solenoid valves. All models include ATEX, IECEX, and NEC, CEC/CSA certifications.

TECHNICAL DATA

Operating Temperature Range	-40 to 50 °C
Power Consumption (cold) - at rated voltage	30 Watts
Voltage/Frequency	115 VAC 50/60 Hz
Duty Cycle Rating	100 %
Connector	1/2" NPT female connector
Coil Nut Torque	0,5 Nm

NOTES

- 1. Mount coil onto spool (tube) body.
- 2. A cable entry hole is provided to accommodate any suitable certified flameproof cable entry device. Cable entry temperature may exceed 70° C (158° F).
- 3. Remove terminal box cover and connect electrical supply and earth to terminal block. Conductors according to Note 4. Note: coil is polarity insensitive. The center terminal is the internal ground. Replace cover and secure with the four screws (M4 x ,7). Torque to min 1.92
- 4. Connect external ground. North American applications: external earth (ground) connections. Use where local codes or authorities permit or require external earth (ground) connections. Torque to 1.25 ft-lbs (1.7 N-m).
- 5. When installing with multiple coils, the coils must be spaced a minimum of 0.875" (22.23 mm) apart to ensure adequate heat dissipation.
- A common practice to protect the internal bridge rectifier from unknown incoming voltage conditions is to install a TVS diode. For the 115-Vac coil, diode part number, 1.5KE250CA is recommended; for the 230-Vac coil, diode part number 1.5KE400CA is recommended. Depending on the application, diodes higher than 1500 W are recommended.
- For installation in above-ground electrical systems in explosive atmospheres, procedures for all applicable codes must be observed. All work must be carried out by an electrician with adequate qualifications for hazardous locations.
- Sun's 747 Series hazardous location coil requires more clearance than the FLeX 740 series coil. Sun manifolds with more than one cavity may not allow enough clearance for these coils. An additional 2.00" (50,8 mm) beyond the valve extension is needed for coil installation

USED WITH

DFBD DFBE DFBF DFBG DTAF DTBF FPBF FPBG FPBI FPBJ