



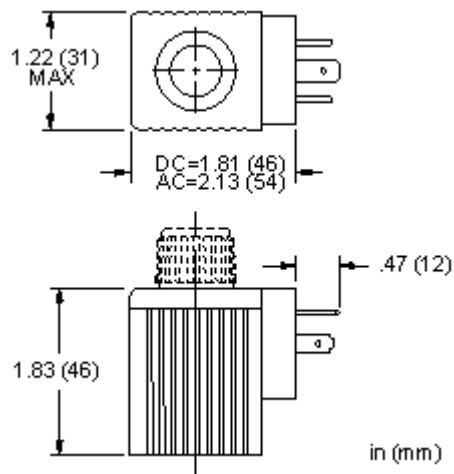

115 VAC 50/60 Hz coil with ISO/DIN 43650, Form A connector

Model:
760-211



Technical Features

- Coil windings utilize Class N, (392° F [200 °C] rated) magnet wire.
- Alternating current (AC) coils are DC coils that contain an integral full wave rectifier, model 2KPB10M, molded into the coil in addition to an MOV, model SIOV-S10K-130, for surge suppression. Because of this, there is no pull-in current and coils don't burn out if something prevents the valve from shifting.
- The coil is magnetically symmetrical and can be mounted in either direction on the solenoid tube without affecting performance.
- Encapsulating material: Mineral filled, glass fiber reinforced, epoxy molding compound.
- Power cable with mating connector is required and is not included with product.
- RoHS compliant. Restricted materials less than 0.1% total by weight.

Technical Data

	U.S. Units	Metric Units
Arc Suppression	Standard	
Maximum Coil Temperature at 68°F (20°C) Ambient	218°F (105°C)	
Operating Voltage Range	+/- 20% nominal	
Power Consumption (cold) - at rated voltage	12 watts	
Voltage/Frequency	115 VAC 50/60 Hz	
Connector Environment Rating	IP65	
Duty cycle Rating	100 %	
Connector	ISO/DIN 43650A, Form A	
Solenoid Tube Diameter	.56 in.	14,2 mm
Coil Nut Torque	4.5 lbf in.	0,5 Nm
Model Weight	0.32 lb.	0.15 kg.

760-211

What models can this kit be used on?

DAAA

DAAC

DACC

DACD

DBAA

DBAC