


Series P - T-9A cavity, Viton, cartridge seal kit

Model:
990-009-006

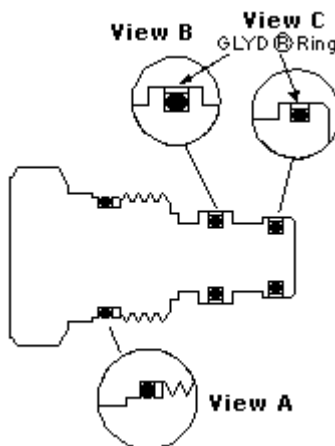

Technical Features

- The shelf life for this cartridge seal kit is twenty years from date of purchase. This date will be printed on the kit packaging.

Cartridge Installation Data

	U.S. Units	Metric Units
Cavity		T-9A
Cartridge Thread		M16
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	20 - 25 lbf ft	27 - 33 Nm

990-009-006

What models can this kit be used on?

DBAA	DBAC	DBAL	DBALS	XACB	XACBE	XAOB	XAOC
------	------	------	-------	------	-------	------	------

Display Components

	Description	Quantity	View
530-002-011	Glyd Ring	1	C
500-101-010	O-Ring	1	C
500-101-011	O-Ring	1	B
500-102-014	O-Ring	1	A
530-002-012	Glyd Ring	1	B
515-102-014	Backup Ring	1	A
999-019-095	Literature	1	

Instructions/Notes

- Install back-up rings and O-rings as shown in views.
- When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
- After installing the GLYD® Ring, size it to restore original shape and to prevent damage during cartridge installation.
- When installing cartridge - be sure to torque to recommended value.
- GLYD® Ring is a registered trademark of W. S. Shamban and Co., Los Angeles, CA, USA