


Series P - T-9A cavity, buna-N cartridge seal kit

Model:
990-009-007

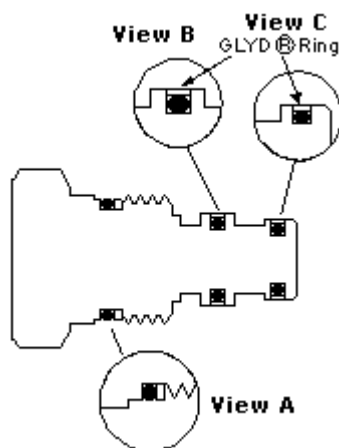

Technical Features

The shelf life for a Buna-N cartridge seal kit is ten years from date of purchase. This date will be printed on the kit packaging.

Cartridge Installation Data

	U.S. Units	Metric Units
Cavity		T-9A
Cartridge Thread		M16
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	20 - 25 lbf ft	27 - 33 Nm

990-009-007

What models can this kit be used on?

DBAA DBAC DBAL DBALS XACB XACBE XAOB XAOC

Display Components

	Description	Quantity	View
500-001-011	O-Ring	1	C
500-001-010	O-Ring	1	C
530-002-011	Glyd Ring	1	B
500-002-014	O-Ring	1	A
515-002-014	Backup Ring	1	A
530-002-012	Glyd Ring	1	B
999-019-096	Literature	1	

Instructions/Notes

- Install back-up rings and O-rings as shown in views.
- When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
- After installing the GLYD® Ring, size it to restore original shape and to prevent damage during cartridge installation.
- When installing cartridge - be sure to torque to recommended value.
- GLYD® Ring is a registered trademark of W. S. Shamban and Co., Los Angeles, CA, USA