
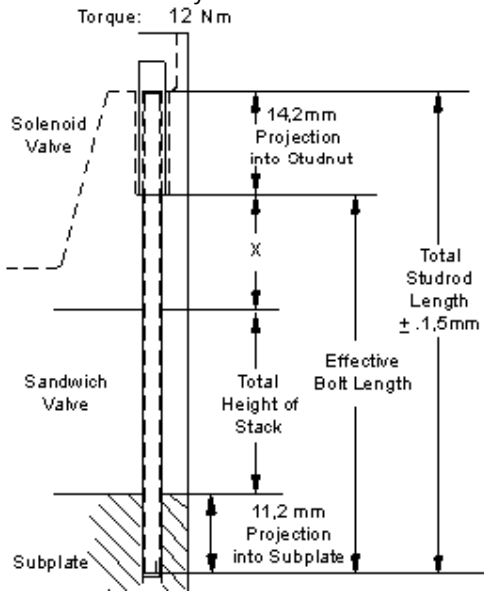
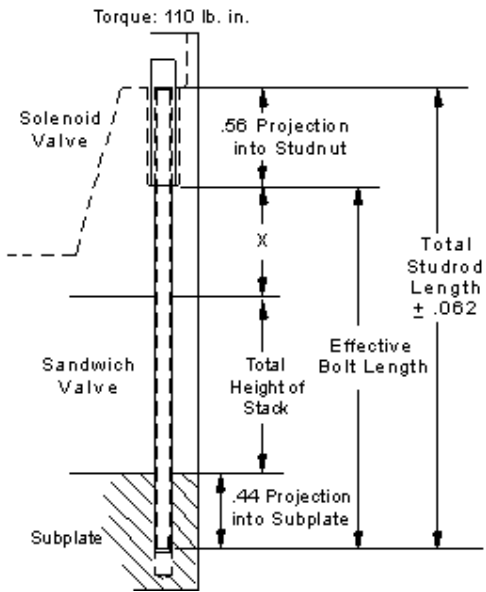


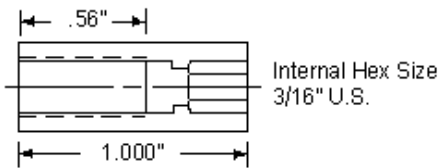

To simplify the installation of ISO 03 and ISO 05 sandwiches, Sun offers uncut (can be cut to length in the field) or precut studkits in both inch and metric standard threaded rod. Once the rods are installed in a subplate or manifold, they act as a guide in assembling the sandwich body stack. After the directional control valve is assembled on top of the stack, Sun studnuts are used to retain the assembled stack.

TECHNICAL DATA

Recommended Torque	12 Nm
Internal Hex Size	3/16 in.
Thread	1/4-20
Studrod Length	Customer Specified in increments of .062 in.
Minimum Tensile Strength	8620 bar
Minimum Yield Point	105,000 psi
Hardness	26 - 32 Rc
Model Weight	0.71 kg.

NOTES Studrod cut length charge of \$1.00/inch will be added to base price of kit.

INCLUDED COMPONENTS

Part	Description	Quantity
310-036-000	Studrod	4
350-004	Studnut	4

TECHNICAL FEATURES

- Studnuts feature an outside diameter equivalent to a standard socket head cap screw.
- Full Thread engagement.
- Mechanical stop between the internal hex and the thread to prevent the hex wrench from being pushed out of its socket.