


# T-32A cavity form drill

Model: **994-032-101** 

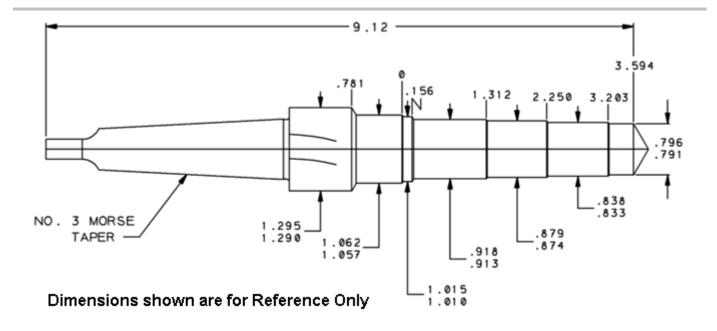

#### **Technical Features**

### **Technical Data**

II C. IInita	Matria IIrita
U.S. Units	Metric Units
T-32A	
2	
TiN coated high speed steel	
4 Port	
1.29 lb.	0.59 kg.
	TiN coated hi

## 994-032-101

### Instructions/Notes

- Drill Angle at all steps, 120 degrees included
- Two Flutes
- All diameters must be concentric within .001 T.I.R.
- Radius notch thinned point
- Recommended for use on ductile iron.
- Dimensions are in inches.
- Speed and feed values are provided as reference only and can vary based on type of cutting tool, machine, coolant used, etc.