


T-382A cavity form drill, straight shank

Model: **994-382-101**

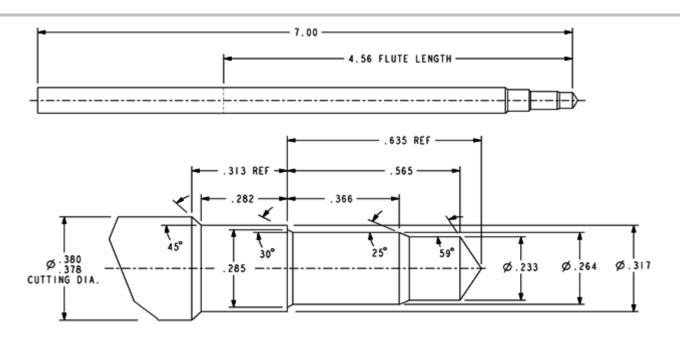

Dimensions shown are for Reference Only

Technical Features

| Technical Data | |
|--------------------|-------------------------|
| | U.S. Units Metric Units |
| Cavity | T-382A |
| Series | Z |
| Material | TiN coated high speed |
| | steel |
| Port Configuration | 2 Port |

994-382-101

Instructions/Notes

- Two Flutes
- All diameters must be concentric within .001 T.I.R.
- Radius notch thinned point
- Recommended for use on ductile iron.
- Dimensions are in inches.
- Speed and feed values are provided as reference only and can vary based on type of cutting tool, machine, coolant used, etc.