

SDP63 to SDP160

High return forces with gas pressure accumulator

Crane Installations, Optimized Characteristic


Energy capacity 9,100 Nm/Cycle to 582,000 Nm/Cycle

Stroke 50 mm to 1,200 mm

Reliability: The emergency stop from the large scale SDP63 to SDP160 series have internal system seals. Even dirt or damages to the piston rod do not lead to a leakage or failure. Compressed gas accumulators allow return forces of up to 100 kN, which can make applications in multiple bridge crane systems safer, for example. The absorber body and the robust, large-sized piston rod bearing are also designed for heavy duty operations

Just like all ACE safety shock absorbers, the characteristic curve or damping characteristics of each individual absorber is individually adjusted to the respective application.

Whether its crane systems or machines in heavy duty applications e.g. in the metal industry or in mining, these powerful safety shock absorbers reliably protect construction designs against expensive failure.

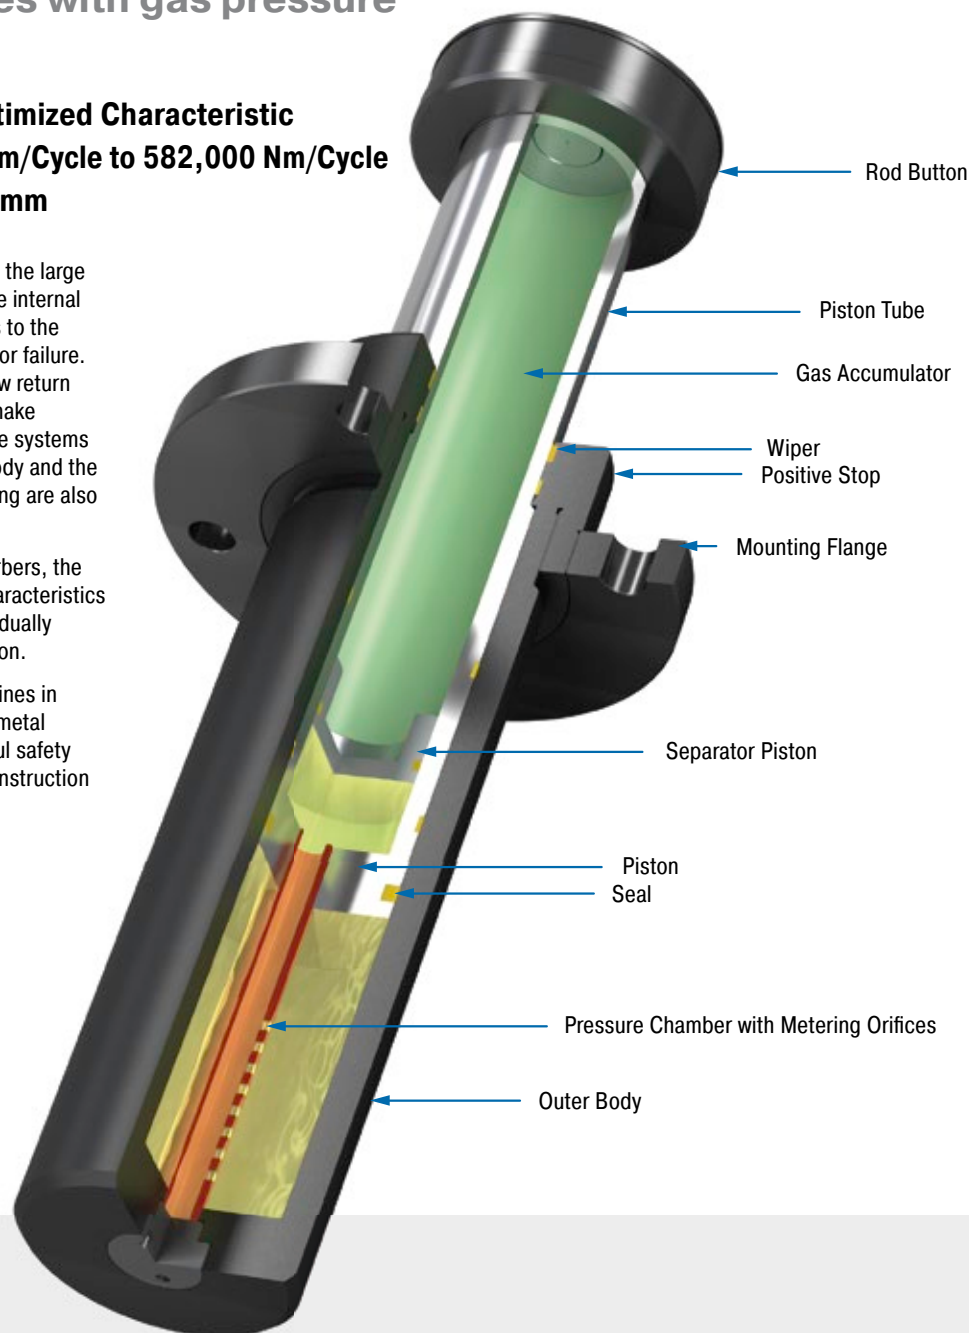

Technical Data

Energy capacity: 9,100 Nm/Cycle to 582,000 Nm/Cycle

Impact velocity range: 0.5 m/s to 4.6 m/s. Other speeds on request.

Reacting force: At max. capacity rating = 110 kN to 1.000 kN

Operating temperature range: -20 °C to +60 °C. Other temperatures on request.

Mounting: In any position

Positive stop: Integrated

Material: Outer body: Painted steel; Rod end button: Steel; Piston tube: Hard chrome plated steel

Damping medium: HLP 46


Filling pressure: Approx. 5 bar. Rod return by integrated nitrogen accumulator.

Application field: Shelf storage systems, Heavy load applications


Note: The shock absorber can be pushed through its stroke. In creep speed conditions the shock absorber provides minimal resistance and there is no braking effect.

On request: Special oils, special flanges, additional corrosion protection etc.

SDP63EU-F Front Flange

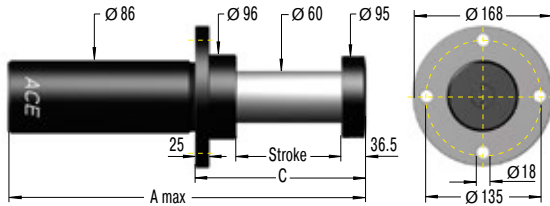

SDP63EU-R Rear Flange

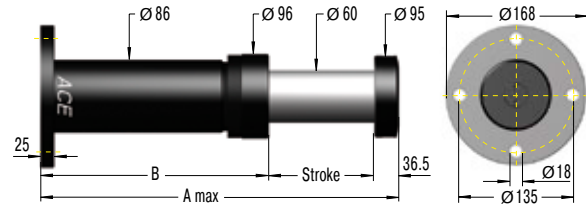

Technical Data

Impact velocity range: 0.5 m/s to 4.6 m/s. Other speeds on request.

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Complete details required when ordering

Moving load: m (kg)
Impact velocity range: v (m/s) max.
Creep speed: vs (m/s)
Motor power: P (kW)
Stall torque factor: ST (normal, 2.5)
Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 265.

Ordering Example

SDP63-400EU-F-XXXXX
Safety Shock Absorber _____
Bore Size Ø 63 mm _____
Stroke 400 mm _____
EU Compliant _____
Mounting Style: Front Flange _____
Identification No. assigned by ACE _____


Please indicate identification no. in case of replacement order

Performance and Dimensions


TYPES	Energy capacity Nm/cycle	Reacting Force N	Return Force min. N	Return Force max. N	Stroke mm	A max. mm	B mm	C mm	Weight kg
SDP63-50EU	9,100	200,000	1,500	8,000	50	280	193.5	145	11
SDP63-75EU	13,600	200,000	1,500	10,000	75	360	248.5	170	13
SDP63-100EU	18,200	200,000	1,500	11,000	100	425	288.5	195	13
SDP63-150EU	27,300	200,000	1,500	15,000	150	560	373.5	245	17
SDP63-200EU	36,400	200,000	1,500	17,000	200	700	463.5	295	19
SDP63-250EU	43,200	190,000	1,500	18,000	250	840	553.5	345	21
SDP63-300EU	49,100	180,000	1,500	20,000	300	980	643.5	395	24
SDP63-400EU	54,500	150,000	1,500	20,000	400	1,265	828.5	495	29
SDP63-500EU	59,100	130,000	1,500	20,000	500	1,555	1,018.5	595	34
SDP63-600EU	60,000	110,000	1,500	20,000	600	1,840	1,203.5	695	39

In case of an existing side load angle, please consult ACE.

SDP80EU-F Front Flange

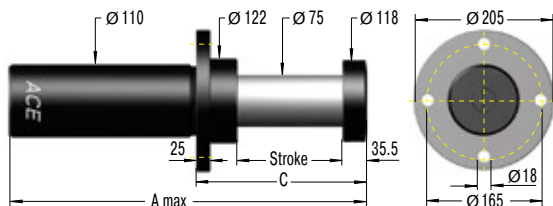

SDP80EU-R Rear Flange

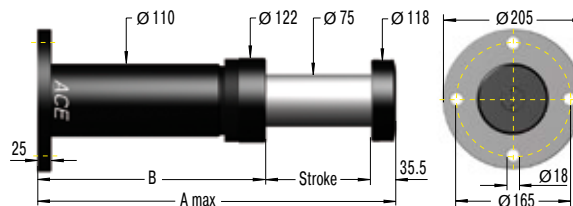

Technical Data

Impact velocity range: 0.5 m/s to 4.6 m/s. Other speeds on request.

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Complete details required when ordering

Moving load: m (kg)
Impact velocity range: v (m/s) max.
Creep speed: vs (m/s)
Motor power: P (kW)
Stall torque factor: ST (normal, 2.5)
Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 265.

Ordering Example

SDP80-200EU-F-XXXXX
Safety Shock Absorber _____
Bore Size Ø 80 mm _____
Stroke 200 mm _____
EU Compliant _____
Mounting Style: Front Flange _____
Identification No. assigned by ACE _____


Please indicate identification no. in case of replacement order

Performance and Dimensions


TYPES	Energy capacity Nm/cycle	Reacting Force N	Return Force min. N	Return Force max. N	Stroke mm	A max. mm	B mm	C mm	Weight kg
SDP80-50EU	11,800	260,000	2,500	16,000	50	285	199.5	155	19
SDP80-100EU	23,600	260,000	2,500	16,000	100	440	304.5	205	23
SDP80-150EU	35,500	260,000	2,500	20,000	150	580	394.5	255	27
SDP80-200EU	47,300	260,000	2,500	20,000	200	730	494.5	305	32
SDP80-250EU	56,800	250,000	2,500	25,000	250	865	579.5	355	35
SDP80-300EU	65,500	240,000	2,500	25,000	300	1,010	674.5	405	39
SDP80-400EU	80,000	220,000	2,500	30,000	400	1,285	849.5	505	47
SDP80-500EU	90,900	200,000	2,500	30,000	500	1,575	1,039.5	605	55
SDP80-600EU	98,200	180,000	2,500	30,000	600	1,865	1,229.5	705	64
SDP80-800EU	101,800	140,000	2,500	30,000	800	2,450	1,614.5	905	80

In case of an existing side load angle, please consult ACE.

SDP100EU-F Front Flange

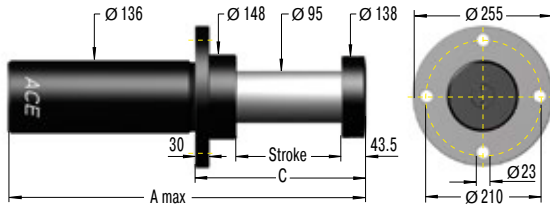

SDP100EU-R Rear Flange

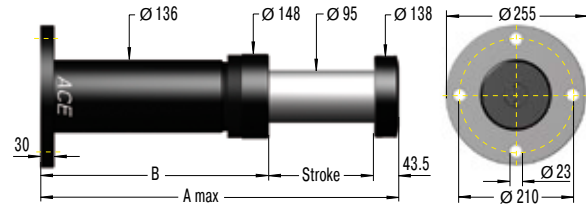

Technical Data

Impact velocity range: 0.5 m/s to 4.6 m/s. Other speeds on request.

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Complete details required when ordering

Moving load: m (kg)
Impact velocity range: v (m/s) max.
Creep speed: vs (m/s)
Motor power: P (kW)
Stall torque factor: ST (normal, 2.5)
Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 265.

Ordering Example

SDP100-400EU-F-XXXXX
Safety Shock Absorber _____
Bore Size Ø 100 mm _____
Stroke 400 mm _____
EU Compliant _____
Mounting Style: Front Flange _____
Identification No. assigned by ACE _____


Please indicate identification no. in case of replacement order

Performance and Dimensions


TYPES	Energy capacity Nm/cycle	Reacting Force N	Return Force min. N	Return Force max. N	Stroke mm	A max. mm	B mm	C mm	Weight kg
SDP100-100EU	47,000	520,000	3,900	38,000	100	460	316.5	230	38
SDP100-200EU	95,000	520,000	3,900	38,000	200	750	506.5	330	53
SDP100-250EU	114,000	520,000	3,900	40,000	250	890	596.5	380	59
SDP100-300EU	131,000	500,000	3,900	40,000	300	1,035	691.5	430	66
SDP100-400EU	160,000	480,000	3,900	40,000	400	1,325	881.5	530	81
SDP100-500EU	182,000	440,000	3,900	40,000	500	1,610	1,066.5	630	93
SDP100-600EU	196,000	360,000	3,900	46,000	600	1,880	1,236.5	730	103
SDP100-800EU	218,000	300,000	3,900	46,000	800	2,450	1,606.5	930	125
SDP100-1000EU	236,000	260,000	3,900	46,000	1,000	3,020	1,976.5	1,130	160

In case of an existing side load angle, please consult ACE.

SDP120EU-F Front Flange

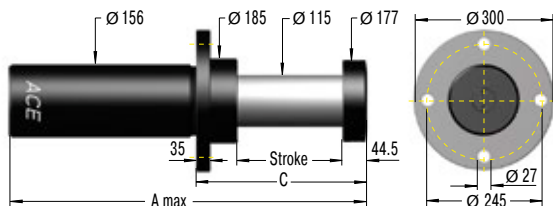

SDP120EU-R Rear Flange

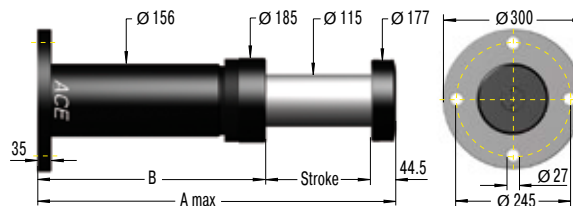

Technical Data

Impact velocity range: 0.5 m/s to 4.6 m/s. Other speeds on request.

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Complete details required when ordering

Moving load: m (kg)
Impact velocity range: v (m/s) max.
Creep speed: vs (m/s)
Motor power: P (kW)
Stall torque factor: ST (normal, 2.5)
Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 265.

Ordering Example

SDP120-800EU-F-XXXXX

Safety Shock Absorber _____
Bore Size Ø 120 mm _____
Stroke 800 mm _____
EU Compliant _____
Mounting Style: Front Flange _____
Identification No. assigned by ACE _____


Please indicate identification no. in case of replacement order

Performance and Dimensions


TYPES	Energy capacity Nm/cycle	Reacting Force N	Return Force min. N	Return Force max. N	Stroke mm	A max. mm	B mm	C mm	Weight kg
SDP120-100EU	64,000	700,000	5,600	35,000	100	460	315.5	249	58
SDP120-200EU	127,000	700,000	5,600	70,000	200	750	505.5	355	72
SDP120-400EU	236,000	650,000	5,600	75,000	400	1,325	880.5	555	99
SDP120-600EU	300,000	550,000	5,600	75,000	600	1,880	1,235.5	755	125
SDP120-800EU	327,000	450,000	5,600	75,000	800	2,450	1,605.5	955	160
SDP120-1000EU	364,000	400,000	5,600	75,000	1,000	3,020	1,975.5	1,155	192
SDP120-1200EU	436,000	400,000	5,600	75,000	1,200	3,590	2,345.5	1,355	225

In case of an existing side load angle, please consult ACE.

SDP160EU-F Front Flange

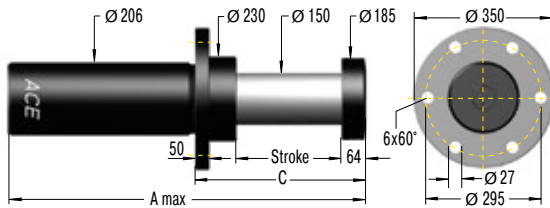

SDP160EU-R Rear Flange

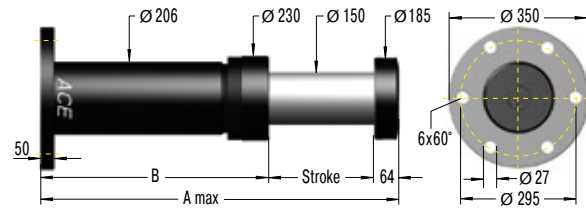

Technical Data

Impact velocity range: 0.5 m/s to 4.6 m/s. Other speeds on request.

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Complete details required when ordering

Moving load: m (kg)
Impact velocity range: v (m/s) max.
Creep speed: vs (m/s)
Motor power: P (kW)
Stall torque factor: ST (normal, 2.5)
Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 265.

Ordering Example

SDP160-400EU-F-XXXXX
Safety Shock Absorber _____
Bore Size Ø 160 mm _____
Stroke 400 mm _____
EU Compliant _____
Mounting Style: Front Flange _____
Identification No. assigned by ACE _____

Please indicate identification no. in case of replacement order

Performance and Dimensions

TYPES	Energy capacity Nm/cycle	Reacting Force N	Return Force min. N	Return Force max. N	Stroke mm	A max. mm	B mm	C mm	Weight kg
SDP160-200EU	182,000	1,000,000	1,000	80,000	200	860	596	440	105
SDP160-400EU	345,000	950,000	1,000	80,000	400	1,485	1,021	640	165
SDP160-500EU	409,000	900,000	1,000	90,000	500	1,765	1,201	740	195
SDP160-600EU	469,000	860,000	1,000	95,000	600	2,065	1,401	840	230
SDP160-800EU	545,000	750,000	1,000	100,000	800	2,660	1,796	1,040	290
SDP160-1000EU	545,000	600,000	1,000	110,000	1,000	3,225	2,161	1,240	350
SDP160-1200EU	545,000	500,000	1,000	110,000	1,200	3,815	2,551	1,440	410
SDP160-1600EU	582,000	400,000	1,000	110,000	1,600	4,995	3,331	1,840	530

In case of an existing side load angle, please consult ACE.