





Free flow side to nose check valve with bypass orifice and port 3 blocked

Capacity:
120 gpm (480 L/min.)

Model:
CNID

Product Description

Free-flow, side-to-nose cheater check valves with a bypass orifice function as a 2-port check valve in a 3-port cavity. They allow free flow from port 2 to port 1 with a customer specified orifice that controls flow from port 1 to port 2. Port 3 of the cartridge is blocked off.

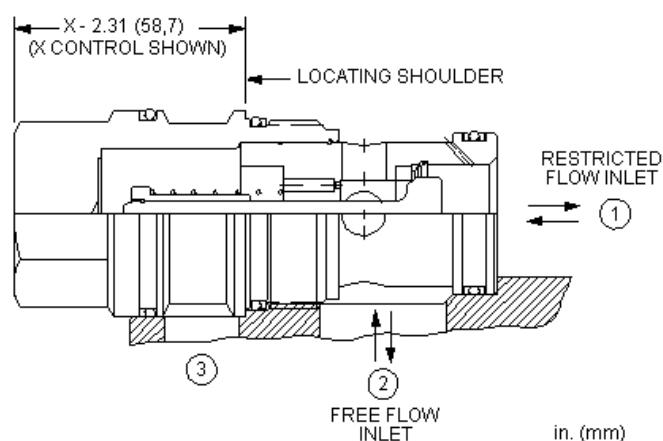



Technical Features

- When used in a full time regeneration circuit these valves allow full force to be developed by the cylinder when it comes to a stop. The bypass orifice drops the rod end pressure to zero when flow out of the rod stops.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-19A	
Capacity	120 gpm	480 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Orifice Range	.016 - .218 in.	0,4 - 5,5 mm
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm
Seal Kits - Cartridge	Buna: 990-019-007	
Seal Kits - Cartridge	Viton: 990-019-006	
Model Weight	2.34 lb.	1.06 kg.

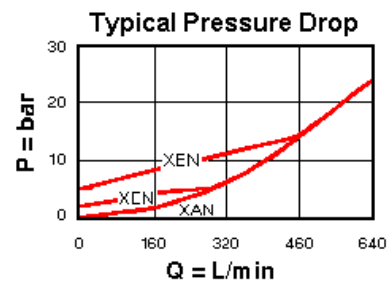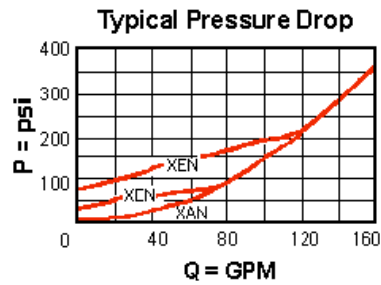

CNID-XCN

Control	Setting Range	Seal Material	Material/Coating Modifier
Standard Options	Standard Options	Standard Options	Preferred Options
X Not Adjustable	C* 30 psi (2 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)	N Buna-N V Viton	No modifier (standard material with no special coating) Special Options / AP Stainless Steel, Passivated Control:X <i>Our stainless product line is growing! If you are interested in a stainless option for this model which is not shown please contact Sun.</i>

Additional Options

Control	Setting Range	Seal Material
---------	---------------	---------------

- A* 4 psi (0,3 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)
- B* 15 psi (1 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)
- D* 50 psi (3,5 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)
- E* 75 psi (5 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)
- F* 100 psi (7 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)
- Z* 1 psi (0,07 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)

When the modifier is /AP, the control must be X

* Special Setting required, specify at time of order