





Free flow nose to side checkvalve - pilot capacity

Capacity:
5 gpm (20 L/min.)

Model:
CXAA

Product Description

Free-flow, nose-to-side check valves are on/off circuit components that allow free flow from the inlet (port 1) to the outlet (port 2) and block flow in the opposite direction.

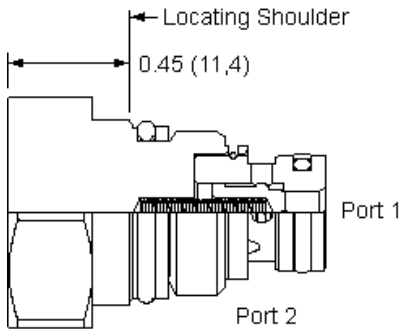


Technical Features

- Check valves offer extremely low leakage rates with a maximum leakage of less than 1 drop per minute (0,07 cc/min).
- Will accept 5000 psi (350 bar) at ports 1 and 2.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity		T-8A
Capacity	5 gpm	20 L/min.
Series (from Cavity)		Series P
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	20 - 25 lbf ft	27 - 33 Nm
Seal Kits - Cartridge		Buna: 990-008-007
Seal Kits - Cartridge		Viton: 990-008-006
Model Weight	0.11 lb.	0.05 kg.

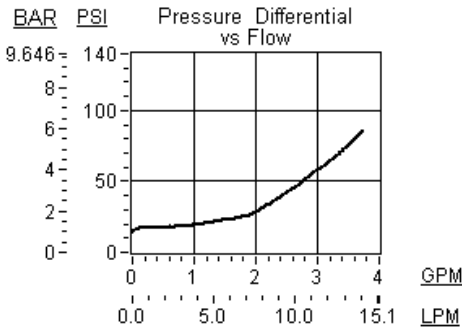

CXAA-XBN

Control	Cracking Pressure	Seal Material
Standard Options	Standard Options	Standard Options
X Not Adjustable	B 15 psi (1 bar)	N Buna-N
	Z 1 psi (0,07 bar)	V Viton