





Free flow side to nose check valve with port 3 blocked

Capacity:
15 gpm (60 L/min.)

Model:
CXCE

Product Description

Free-flow, side-to-nose cheater check valves function as a standard 2-port check valve in a 3-port cavity with port 3 of the cartridge blocked off. These valves are useful in circuits where a check valve is required in an existing three port cavity.

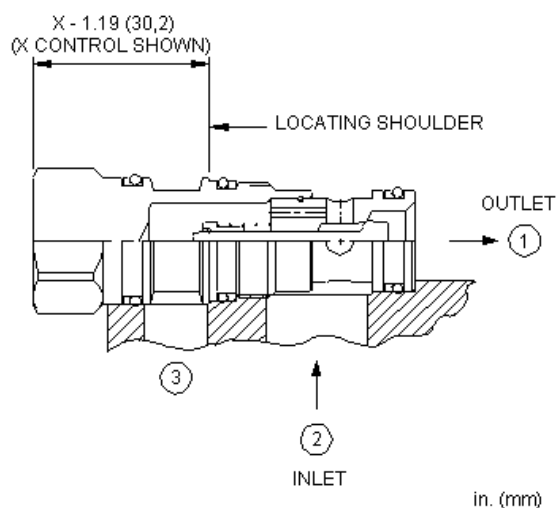



Technical Features

- Two-port check valves share the same cavity for a given frame size, however, pay close attention as flow paths may be in opposite directions.
- Check valves offer extremely low leakage rates with a maximum leakage of less than 1 drop per minute (0,07 cc/min).
- Will accept 5000 psi (350 bar) at ports 1 and 2.
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP (see Option Selection below). External parts are made from stainless steel with titanium or brass components, where applicable. Internal parts are made from carbon steel leaded alloy, the same as standard valves. For further details, please see the Materials of Construction page.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-11A	
Capacity	15 gpm	60 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.	0,07 cc/min.
Series (from Cavity)	Series 1	
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	40 - 50 Nm
Seal Kits - Cartridge	Buna: 990-011-007	
Seal Kits - Cartridge	Viton: 990-011-006	
Model Weight	0.26 lb.	0.12 kg.

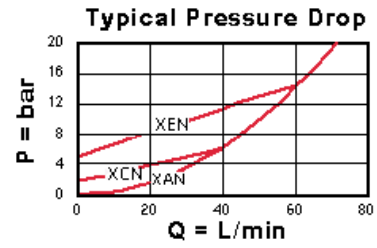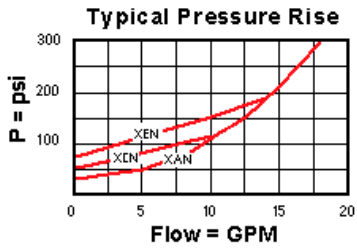

CXCE-XCN

Control

Standard Options

X Not Adjustable

Cracking Pressure

Standard Options

- A 4 psi (0,3 bar)
- B 15 psi (1 bar)
- C 30 psi (2 bar)
- D 50 psi (3,5 bar)
- E 75 psi (5 bar)
- F 100 psi (7 bar)

Seal Material

Standard Options

- N Buna-N
- V Viton

**Material/Coating
Modifier**

Preferred Options

No modifier (standard material with no special coating)

Special Options

/AP Stainless Steel, Passivated

Control:X

Our stainless product line is growing! If you are interested in a stainless option for this model which is not shown please contact Sun.

Additional Options

Control

L Manual Override

Cracking Pressure

Z 1 psi (0,07 bar)

Seal Material

When the modifier is /AP, the control must be X