



Piston type, hot oil check valve



Capacity:
10 gpm (40 L/min.)

Functional Group:
Products : Cartridges : Check : 2-Port : Free Flow Nose to Side

Model:
CXDF

Product Description

This valve was designed to be used in a parts-in-body, hot oil shuttle assembly. 2 valves, nose to nose, with a pin in between created the low side shuttle.

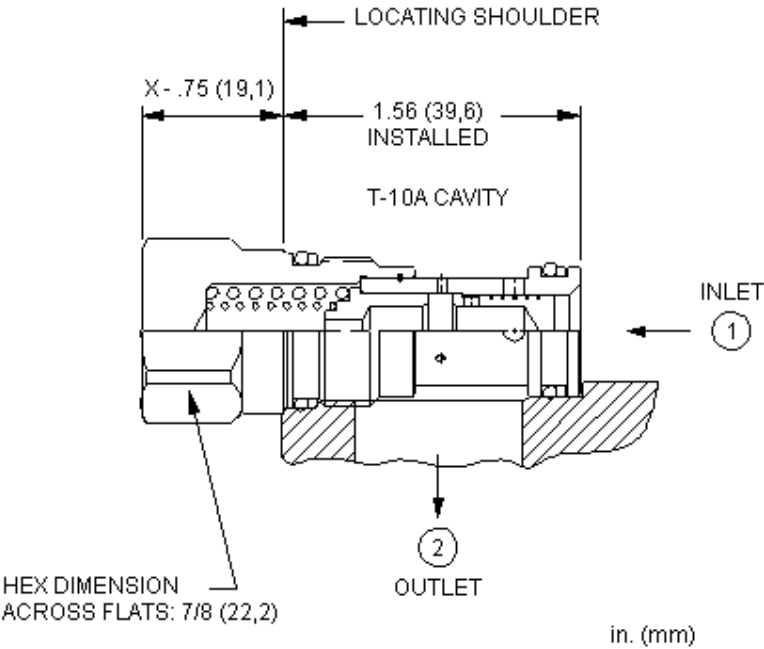

Technical Features

Technical Data	U.S. Units	Metric Units
Cavity	T-10A	
Capacity	10 gpm	40 L/min.
Series (from Cavity)	Series 1	
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	41 - 47 Nm
Seal Kits - Cartridge	Buna: 990-010-007	
Seal Kits - Cartridge	Polyurethane: 990-010-002	
Seal Kits - Cartridge	Viton: 990-010-006	
Model Weight	0.22 lb.	0.10 kg.

CXDF-XEN**Control****Standard Options****X** Not Adjustable**Cracking Pressure****Standard Options****E** 75 psi (5 bar)**G** 150 psi (10,5 bar)**H** 200 psi (14 bar)**Seal Material****Standard Options****N** Buna-N**V** Viton