



Free flow nose to side check valve

Capacity:
40 gpm (160 L/min.)

Functional Group:



Products : Cartridges : Check : 2-Port : Free Flow Nose to Side

Model:

CXFB

Product Description



Free-flow, nose-to-side check valves are on/off circuit components that allow free flow from the inlet (port 1) to the outlet (port 2) and block flow in the opposite direction.

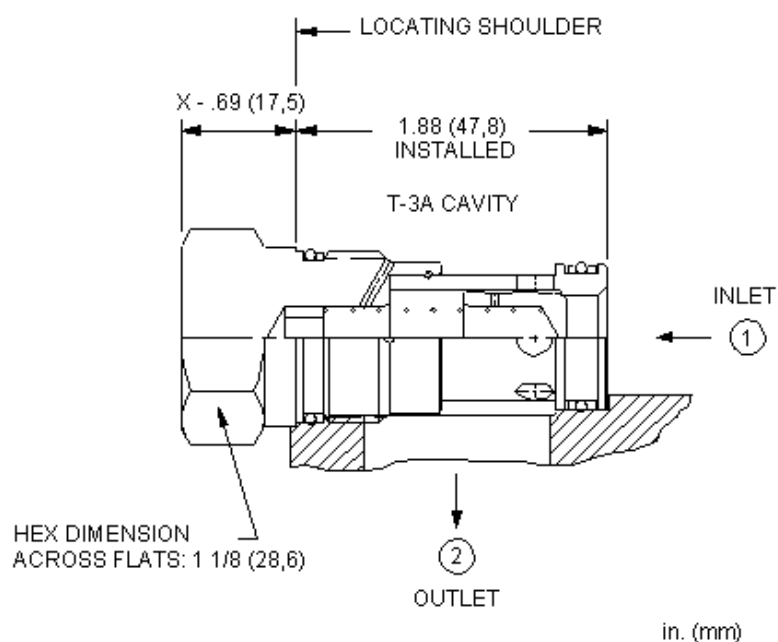

Technical Features

Technical Data

	U.S. Units	Metric Units
Cavity		T-3A
Capacity	40 gpm	160 L/min.
Series (from Cavity)		Series 2
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	61 - 68 Nm
Seal Kits - Cartridge		Buna: 990-203-007
Seal Kits - Cartridge		Viton: 990-203-006
Model Weight	0.43 lb.	0.20 kg.

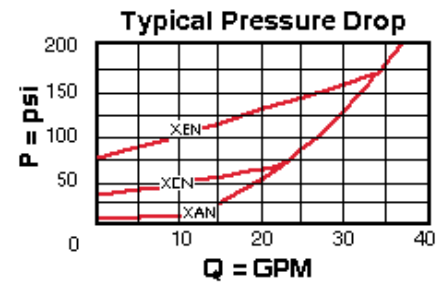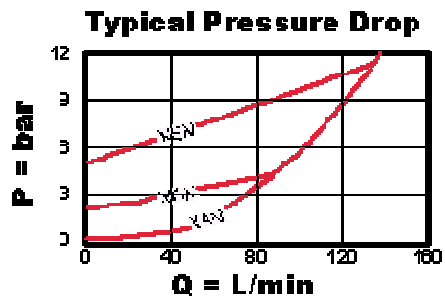

CXFB-XCN

Control	Cracking Pressure	Seal Material	Material/Coating Modifier
Standard Options	Standard Options	Standard Options	Preferred Options
X Not Adjustable	A 4 psi (0,3 bar) B 15 psi (1 bar) C 30 psi (2 bar) D 50 psi (3,5 bar) E 75 psi (5 bar) F 100 psi (7 bar) Z 1 psi (0,07 bar)	N Buna-N V Viton	No modifier (standard material with no special coating) Special Options /AP Stainless Steel, Passivated Control: X

If the modifier is /AP, the control must be X