



Piston type, hot oil check valve



Capacity:
20 gpm (80 L/min.)

Functional Group:
Products : Cartridges : Check : 2-Port : Free Flow Nose to Side

Model:
CXFF

Product Description

This valve was designed to be used in a parts-in-body, hot oil shuttle assembly. 2 valves, nose to nose, with a pin in between created the low side shuttle.

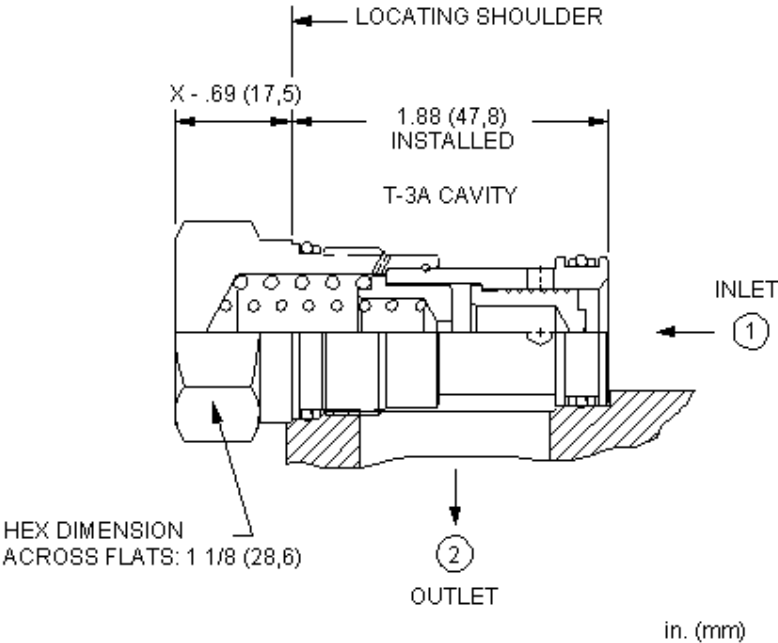

Technical Features

Technical Data

	U.S. Units	Metric Units
Cavity		T-3A
Capacity	20 gpm	80 L/min.
Series (from Cavity)		Series 2
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	61 - 68 Nm
Seal Kits - Cartridge		Buna: 990-203-007
Seal Kits - Cartridge		Viton: 990-203-006
Model Weight	0.39 lb.	0.18 kg.

CXFF-XFN

Control	Cracking Pressure	Seal Material
Standard Options	Standard Options	Standard Options
X Not Adjustable	F 100 psi (7 bar) H 200 psi (14 bar)	N Buna-N V Viton