





Free flow side to nose check valve with port 3 blocked

Capacity:
60 gpm (240 L/min.)

Model:
CXGE

Product Description

Free-flow, side-to-nose cheater check valves function as a standard 2-port check valve in a 3-port cavity with port 3 of the cartridge blocked off. These valves are useful in circuits where a check valve is required in an existing three port cavity.

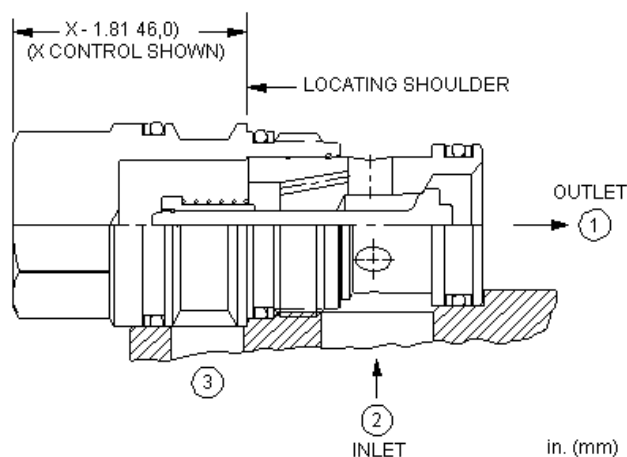



Technical Features

- Two-port check valves share the same cavity for a given frame size, however, pay close attention as flow paths may be in opposite directions.
- Check valves offer extremely low leakage rates with a maximum leakage of less than 1 drop per minute (0,07 cc/min).
- Will accept 5000 psi (350 bar) at ports 1 and 2.
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP (see Option Selection below). External parts are made from stainless steel with titanium or brass components, where applicable. Internal parts are made from carbon steel leaded alloy, the same as standard valves. For further details, please see the Materials of Construction page.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-17A	
Capacity	60 gpm	240 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.	0,07 cc/min.
Series (from Cavity)	Series 3	
Valve Hex Size	1 1/4 in.	31,8 mm
Valve Installation Torque	150 - 160 lbf ft	200 - 215 Nm
Seal Kits - Cartridge	Buna: 990-017-007	
Seal Kits - Cartridge	Viton: 990-017-006	
Model Weight	1.05 lb.	0.48 kg.

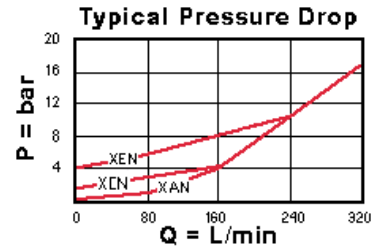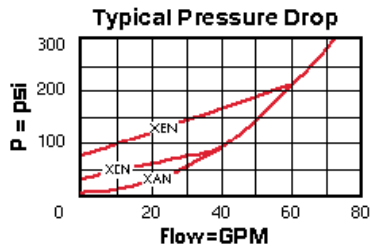

CXGE-XCN

Control	Cracking Pressure	Seal Material	Material/Coating Modifier
Standard Options	Standard Options	Standard Options	Preferred Options
X Not Adjustable	A 4 psi (0,3 bar) B 15 psi (1 bar) C 30 psi (2 bar) D 50 psi (3,5 bar) E 75 psi (5 bar) F 100 psi (7 bar)	N Buna-N V Viton	No modifier (standard material with no special coating) Special Options / AP Stainless Steel, Passivated Control: X <i>Our stainless product line is growing! If you are interested in a stainless option for this model which is not shown please contact Sun.</i>

Additional Options

Control	Cracking Pressure	Seal Material
L Manual Override	Z 1 psi (0,07 bar)	
When the modifier is /AP, the control must be X		