



Piston type, hot oil check valve



Capacity:
40 gpm (160 L/min.)

Functional Group:
Products : Cartridges : Check : 2-Port : Free Flow Nose to Side

Model:
CXHF

Product Description

This valve was designed to be used in a parts-in-body, hot oil shuttle assembly. 2 valves, nose to nose, with a pin in between created the low side shuttle.

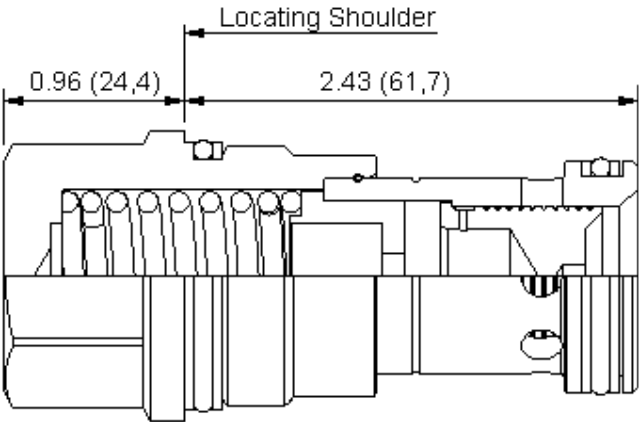

Technical Features

Technical Data

	U.S. Units	Metric Units
Cavity	T-16A	
Capacity	40 gpm	160 L/min.
Series (from Cavity)	Series 3	
Valve Hex Size	1 1/4 in.	31,8 mm
Valve Installation Torque	150 - 160 lbf ft	203 - 217 Nm
Seal Kits - Cartridge	Buna: 990-016-007	
Seal Kits - Cartridge	Polyurethane: 990-016-002	
Seal Kits - Cartridge	Viton: 990-016-006	
Model Weight	0.87 lb.	0.39 kg.

CXHF-XFN

X Not Adjustable**F** 100 psi (7 bar)**G** 150 psi (10,5 bar)**H** 200 psi (14 bar)**N** Buna-N**V** Viton