



Piston type, hot oil check valve



Capacity:
80 gpm (320 L/min.)

Functional Group:
Products : Cartridges : Check : 2-Port : Free Flow Nose to Side

Model:
CXJF

Product Description

This valve was designed to be used in a parts-in-body, hot oil shuttle assembly. 2 valves, nose to nose, with a pin in between created the low side shuttle.

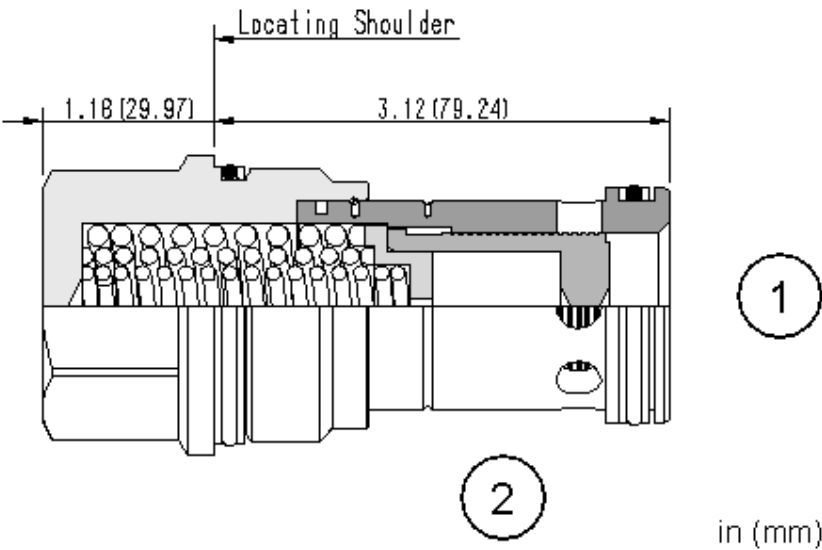

Technical Features

Technical Data

	U.S. Units	Metric Units
Cavity		T-18A
Capacity	80 gpm	320 L/min.
Series (from Cavity)		Series 4
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 508 Nm
Seal Kits - Cartridge		Buna: 990-018-007
Seal Kits - Cartridge		Polyurethane: 990-018-002
Seal Kits - Cartridge		Viton: 990-018-006
Model Weight	2.05 lb.	0.93 kg.

CXJF-XHN

Control	Cracking Pressure	Seal Material
Standard Options	Standard Options	Standard Options
X Not Adjustable	G 150 psi (10,5 bar) H 200 psi (14 bar)	N Buna-N V Viton