
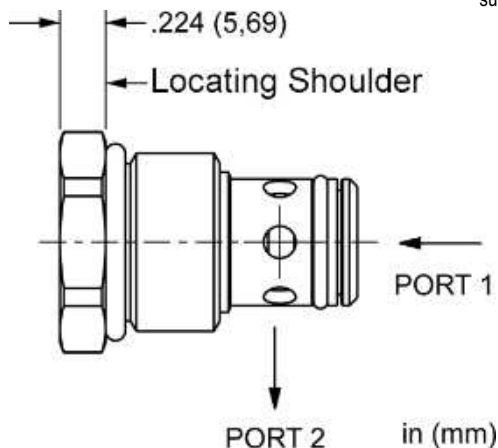




Free-flow, nose-to-side check valves are on/off circuit components that allow free flow from the inlet (port 1) to the outlet (port 2) and block flow in the opposite direction.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	250 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,3 cc/min.
Seal kit - Cartridge	Buna: 99C102007
Seal kit - Cartridge	Viton: 99C102006

CONFIGURATION OPTIONS

Model Code Example: CXUTXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)
X -		C 29 psi (2.0 bar)		N Buna-N	
		A 7 psi (.5 bar)		V Viton	