



2-way, 2 stage, solenoid-operated directional poppet valve - flow 1-2

Capacity:
15 gpm (60 L/min.)

Functional Group:

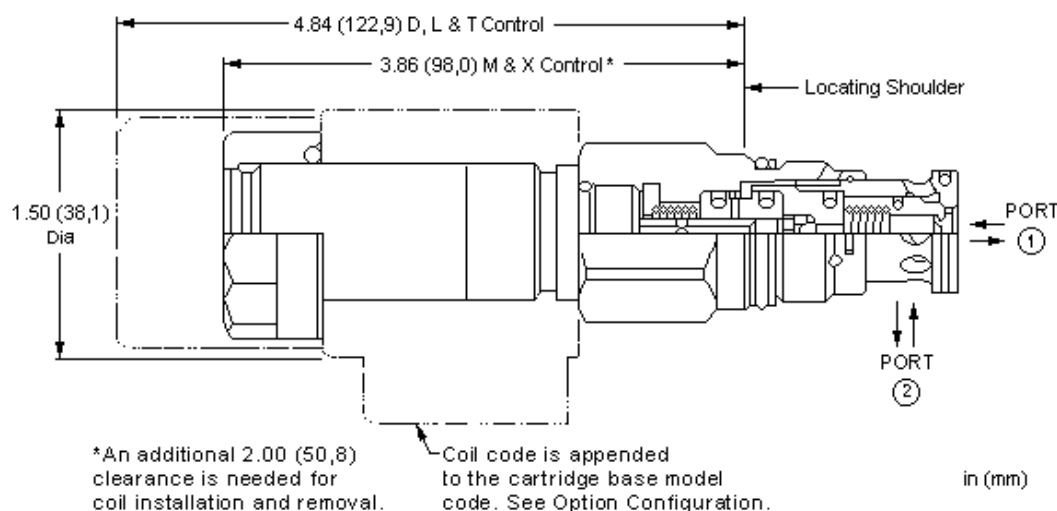
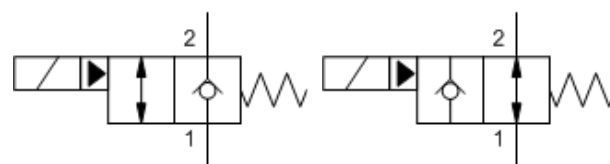
Products : Cartridges : Solenoid Operated : 2-Way : Poppet, Pilot Operated - Flow 1-2

Model:

DFCA

Product Description

This solenoid controlled, 2-way, 2-position cartridge is a pilot-operated, poppet style directional valve with reverse free flow check. It is available in either a normally open or normally closed configuration. Due to its poppet style construction, it has extremely low leakage.




Technical Features

- The solenoid tube assembly is fatigue rated for 5000 psi (350 bar) service.
- This cartridge has several manual override choices, including no manual override. See Option Selection below. Please note: Manual override functionality is not compatible with weatherized coils.
- Valves exhibit extremely low leakage rates; less than 10 drops/min. @ 5000 psi (0,7 cc/min @ 350 bar).
- On models equipped with the D or L control, the detent mechanism in the manual override is meant for temporary actuation. The D, L and T manual control assembly has a mechanical life expectancy of approximately 7,000 cycles.
- This valve utilizes a wet armature design. This means that the working fluid surrounds the armature and is exposed to the heat generated by the coil. This can be a factor if the coil is energized for long periods of time. Some fluids, notably water/glycol mixtures, break down at these temperatures over time and form varnishes that will affect the function of the cartridge.
- A wide variety of coil termination and voltage options are available, with and without surge protection.
- The solenoid's unique magnetic design results in a high efficiency solenoid, yielding high spool actuating force per Watt expended, leading to reliable valve shifting.
- Coils are interchangeable with other Sun Series 1 solenoid products and can be mounted on the tube in either direction.
- Coil connector options offer ratings up to IP69K. See individual coil product pages for details. Additional weatherized coils and kits are available for more complete environmental protection.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.






Technical Data

	U.S. Units	Metric Units
Cavity	T-13A	
Capacity	15 gpm	60 L/min.

Check Cracking Pressure	50 psi	3,5 bar
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.@5000 psi	0,7 cc/min.@350 bar
Response Time - Typical	30 ms	
Series (from Cavity)	Series 1	
Switching Frequency	15000 cycles/hr	
Solenoid Tube Diameter	.75 in.	19 mm
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	41 - 47 Nm
Seal Kits - Cartridge	Buna: 990-310-007	
Seal Kits - Cartridge	Viton: 990-310-006	
Model Weight	0.72 lb.	0.33 kg.

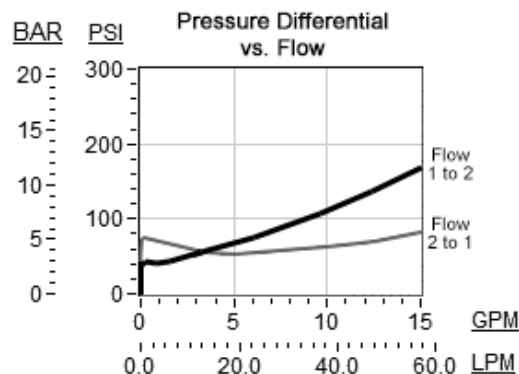

DFCA-XCN-***

Control	Spool Configuration	Seal Material	Coil		
Preferred Options	Preferred Options	Preferred Options	*** See Coil Options Below		
X No Manual Override	C Normally Closed	N Buna-N			
Standard Options	Standard Options	Standard Options			
D Twist/Lock (Dual) Manual Override	H Normally Open	V Viton			
L Twist/Lock (Detent) Manual Override					
M Manual Override					
T Twist (Momentary) Manual Override					
Standard Coil Options					
					
DIN 43650 3 pin (Hirschman)	SAE J858A	AMP Junior Timer	Twin Lead	Metri-Pack	Deutsch DT04-2P
*** no coil		536 SAE J858A, 36 VDC	814N Metri-Pack, 14 VDC, no transient voltage suppression (TVS) diodes		
211 DIN 43650 3 pin (Hirschman), 115 VAC	612 AMP Junior Timer, 12 VDC		824 Metri-Pack, 24 VDC		
212 DIN 43650 3 pin	612N AMP Junior Timer, 12 VDC,		824N Metri-Pack, 24 VDC, no		

	(Hirschman), 12 VDC	no transient voltage suppression (TVS) diodes	transient voltage suppression (TVS) diodes
212N	DIN 43650 3 pin (Hirschman), 12 VDC, no transient voltage suppression (TVS) diodes	614 AMP Junior Timer, 14 VDC	828 Metri-Pack, 28 VDC
214	DIN 43650 3 pin (Hirschman), 14 VDC	624 AMP Junior Timer, 24 VDC	836 Metri-Pack, 36 VDC
214N	DIN 43650 3 pin (Hirschman), 14 VDC, no transient voltage suppression (TVS) diodes	624N AMP Junior Timer, 24 VDC, no transient voltage suppression (TVS) diodes	848 Metri-Pack, 48 VDC
223	DIN 43650 3 pin (Hirschman), 230 VAC	628 AMP Junior Timer, 28 VDC	912 Deutsch DT04-2P, 12 VDC
224	DIN 43650 3 pin (Hirschman), 24 VDC	636 AMP Junior Timer, 36 VDC	912N Deutsch DT04-2P, 12 VDC, no transient voltage suppression (TVS) diodes
224N	DIN 43650 3 pin (Hirschman), 24 VDC, no transient voltage suppression (TVS) diodes	712 Twin Lead, 12 VDC	914 Deutsch DT04-2P, 14 VDC
228	DIN 43650 3 pin (Hirschman), 28 VDC	712N Twin Lead, 12 VDC, no transient voltage suppression (TVS) diodes	914N Deutsch DT04-2P, 14 VDC, no transient voltage suppression (TVS) diodes
236	DIN 43650 3 pin (Hirschman), 36 VDC	724 Twin Lead, 24 VDC	924 Deutsch DT04-2P, 24 VDC
248	DIN 43650 3 pin (Hirschman), 48 VDC	724N Twin Lead, 24 VDC, no transient voltage suppression (TVS) diodes	924N Deutsch DT04-2P, 24 VDC, no transient voltage suppression (TVS) diodes
297	DIN 43650 3 pin (Hirschman), 24 VAC	728 Twin Lead, 28 VDC	928 Deutsch DT04-2P, 28 VDC
298	DIN 43650 3 pin (Hirschman), 220 VDC	736 Twin Lead, 36 VDC	936 Deutsch DT04-2P, 36 VDC
299	DIN 43650 3 pin (Hirschman), 127 VDC	812 Metri-Pack, 12 VDC	948 Deutsch DT04-2P, 48 VDC
514	SAE J858A, 14 VDC	812N Metri-Pack, 12 VDC, no transient voltage suppression (TVS) diodes	HN24AA Hazardous environment duty, 1/2 inch MPT mechanical conduit, 24 VDC, 10 feet twin lead, ATEX Certification Ex mb IIC T3 Gb.
524	SAE J858A, 24 VDC	814 Metri-Pack, 14 VDC	HN24AB Hazardous environment duty, 1/2 inch MPT mechanical conduit, 24 VDC, 10 feet twin lead, CSA Certification
528	SAE J858A, 28 VDC		

Additional Options

Additional Coils

512	SAE J858A, 12 VDC	71219	Twin Lead, to Delphi Weather-Pack Connector, 9 inch lead length, 12 VDC	72419	Twin Lead, to Delphi Weather-Pack Connector, 9 inch lead length 24 VDC
548	SAE J858A, 48 VDC	71299	Twin Lead, to Deutsch connector, 9 inch lead length	72499	Twin Lead, to Deutsch connector, 9 inch lead length
648	AMP Junior Timer, 48 VDC	714	Twin Lead, 14 VDC	748	Twin Lead, 48 VDC

If the coil is HN24AA, the control must be M or X

If the coil is HN24AB, the control must be M or X