



2-way, poppet directional valve with integral T-8A control cavity - control 2-1

Capacity: 15 gpm (60 L/min.) Model: DFCB

## Product Description

This valve is a 2-position, 2-way poppet cartridge that incorporates an integral pilot control cavity. It controls flow from port 2 to port 1, exhibits extremely low leakage rates and will accept 5000 psi (350 bar) at both ports. Installing a pilot solenoid cartridge in the T-8A cavity results in a high flow directional valve. Other pilot options include manual, hydraulic and pneumatic pilot cartridges.




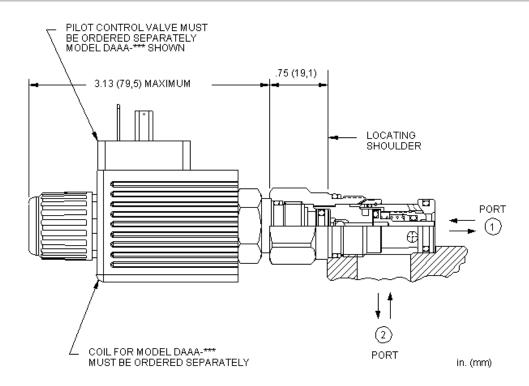


## Technical Features

- NOTE: The main stage valve should first be installed to the correct torque value followed by the T-8A pilot control section into the main stage valve to its required torque value.
- The -8 control option allows the pilot control valve to be incorporated directly into the end of the directional cartridge via the T-8A cavity.
  These pilot control cartridges are sold separately and include solenoid operation, air pilot operation, and hydraulic pilot operation. See Pilot Control Cartridges.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

|   | U.S. Units             | Metric Units        |  |
|---|------------------------|---------------------|--|
| Cavity                                    | T-13A                  |                     |  |
| Capacity                                  | 15 gpm                 | 60 L/min.           |  |
| Maximum Operating Pressure                | 5000 psi               | 350 bar             |  |
| Maximum Valve Leakage at 110 SUS (24 cSt) | 10 drops/min.@5000 psi | 0,7 cc/min.@350 bar |  |
| Pilot Control Cavity                      | T-8A                   |                     |  |
| Pilot Control Valve Installation Torque   | 20 - 25 lbf ft         | 27 - 33 Nm          |  |
| Response Time - Typical                   | see pilot control ms   |                     |  |
| Series (from Cavity)                      | Series 1               |                     |  |
| Valve Hex Size                            | 7/8 in.                | 22,2 mm             |  |
| Valve Installation Torque                 | 30 - 35 lbf ft         | 40 - 50 Nm          |  |
| Seal Kits - Cartridge                     | Buna: 990-310-007      |                     |  |
| Seal Kits - Cartridge                     | Viton: 990-310-006     |                     |  |
| Model Weight                              | 0.19 lb.               | 0.09 kg.            |  |

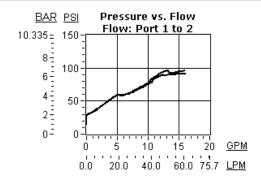

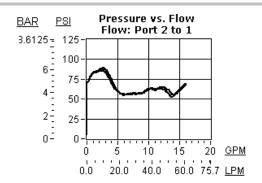

## DFCB-8DN

|     | Control       |     | Cracking Pressure |        | Seal Material |
|-----|---------------|-----|-------------------|--------|---------------|
| Sta | ndard Options | Sta | ndard Options     | Standa | ard Options   |
| 8   | T-8A Cavity   | D   | 50 psi (3,5 bar)  | Ν      | Buna-N        |
|     |               |     |                   | V      | Viton         |