


2-way, poppet directional valve with integral T-8A control cavity - control 2-1


Capacity: 60 gpm (240 L/min.)

> Model: DFEB

Product Description

This valve is a 2-position, 2-way poppet cartridge that incorporates an integral pilot control cavity. It controls flow from port 2 to port 1, exhibits extremely low leakage rates and will accept 5000 psi (350 bar) at both ports. Installing a pilot solenoid cartridge in the T-8A cavity results in a high flow directional valve. Other pilot options include manual, hydraulic and pneumatic pilot cartridges.




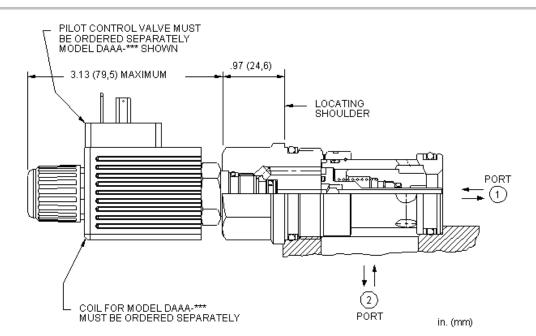


Technical Features

- NOTE: The main stage valve should first be installed to the correct torque value followed by the T-8A pilot control section into the main stage valve to its required torque value.
- The -8 control option allows the pilot control valve to be incorporated directly into the end of the directional cartridge via the T-8A cavity.
 These pilot control cartridges are sold separately and include solenoid operation, air pilot operation, and hydraulic pilot operation. See Pilot Control Cartridges.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

	11.6.11.11.	N.A. (1.2) - 1.1 - 2.1 -	
	U.S. Units	Metric Units	
Cavity	T-16A		
Capacity	60 gpm	240 L/min.	
Maximum Operating Pressure	5000 psi	350 bar	
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.@5000 psi	0,7 cc/min.@350 bar	
Pilot Control Cavity	T-8A		
Pilot Control Valve Installation Torque	20 - 25 lbf ft	27 - 33 Nm	
Response Time - Typical	see pilot control ms		
Series (from Cavity)	Series 3		
Valve Hex Size	1 1/4 in.	31,8 mm	
Valve Installation Torque	150 - 160 lbf ft	200 - 215 Nm	
Seal Kits - Cartridge	Buna: 990-016-007		
Seal Kits - Cartridge	Viton: 990-016-006		
Model Weight	0.99 lb.	0.45 kg.	





DFEB-8DN

	Control		Cracking Pressure		Seal Material
Standard	d Options	Star	ndard Options	Standa	rd Options
8 T-8	A Cavity	D	50 psi (3,5 bar)	Ν	Buna-N
				V	Viton