
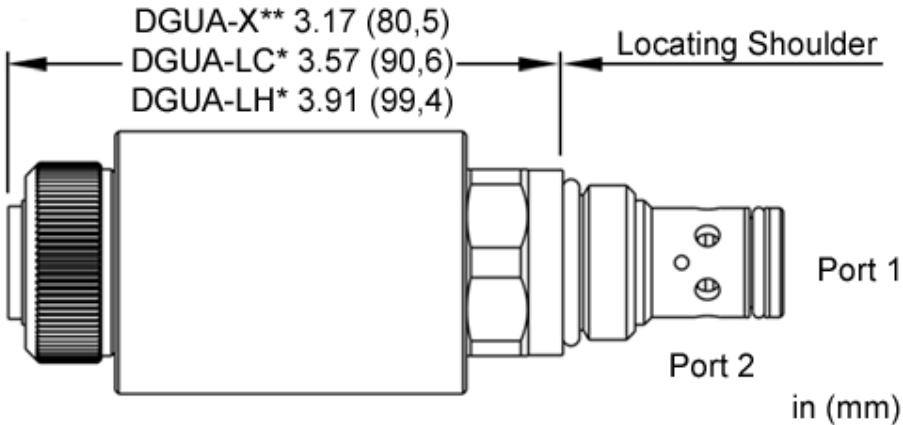


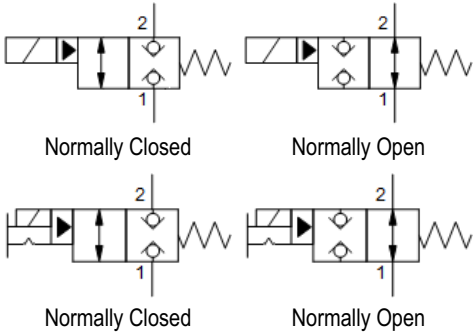

*An additional 2.00 (50,8) clearance needed for coil installation and removal

*Coil code is appended to the cartridge base model code. See CONFIGURATION section

This solenoid-operated, 2-way, 2-position cartridge is a pilot-operated, directional poppet valve. This valve offers 2-position/2-way directional control with a lower pressure drop than its direct-acting counterpart. The valve is available in the normally open and normally closed condition.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	SC-10-02
Series	1C
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Typical Valve Leakage at 110 SUS (24cSt)	15 drops/min.@1600 psi
Response Time - Typical	300 ms
Solenoid Tube Diameter	19 mm
Valve Hex Size	25,4 mm
Coil Nut Torque	4,8 - 5,3 Nm
Valve Installation Torque	39 - 42 Nm
Seal kit - Cartridge	Buna: 99C102007
Seal kit - Cartridge	Viton: 99C102006
Model Weight	0.28 kg.

CONFIGURATION OPTIONS

Model Code Example: DGUAXCN

CONTROL	(X)	SPOOL CONFIGURATION	(C)	SEAL MATERIAL	(N)	COIL *
X No Manual Override		C Normally Closed		N Buna-N		No coil
L Manual Override (Push with Detent)		H Normally Open				

* Additional coil options are available

TECHNICAL FEATURES

- This valve is not suitable for load-holding. Up to 9 in³/min (147 mL/min) of leakage is allowed when below a pressure differential of 1600 psi (110 bar) between its ports.
- The solenoid tube assembly is fatigue rated for 5000 psi (350 bar) service.
- All ports are rated to a maximum operating pressure of 5000 psi (350 bar).
- The valve is available with a manual unscrew-type override option (L control) on the normally closed configuration. This option is also fatigue rated for 5000 psi (350 bar).
- The valve is available with a manual push-type, with detent, override option (L control). This option is also fatigue rated for 5000 psi (350 bar).
- The metal coil nut is a functional feature of the valve and should be correctly installed for proper performance of the valve.
- Coil connector options offer ratings up to IP67. See individual coil product pages for details.
- The cartridge installation torque of 30 lbf ft (40 Nm) is required for best performance.
- Coils can be mounted on the tube in either direction.

PERFORMANCE CURVES

