



3-way, pilot operated, directional valve with internal drain to port 3 (1 to 2 open, 3 blocked)

Functional Group:



Products : Cartridges : Directional; DP**, DR**, DV** : 3 Way - 3 Port - 1 to 2 Open, 3 Blocked : Pilot Operated

Capacity:
15 gpm (60 L/min.)

Model:
DPCD

Product Description

Pilot-operated, 3-way directional cartridges (1 to 2 open, 3 blocked) are switching devices typically used in moderate flow circuits. They can be used by themselves or to actuate larger pilot-operated directional cartridges or logic cartridges. The valve shifts when the pressure differential between port 1 and port 3 exceeds the setting.

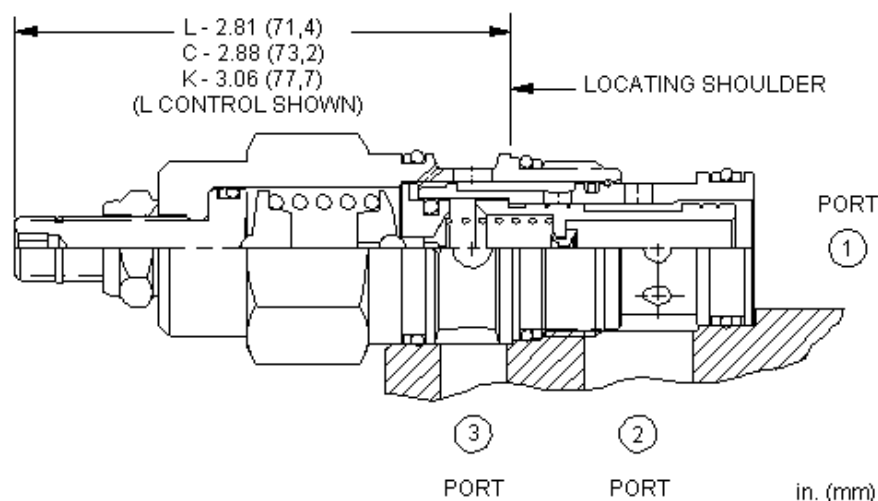





Technical Features

- Pressure at port 3 is directly additive to the setting of the valve. Because of this, port 3 may not be useable as a work port in your circuit. If this is a consideration, the 4 port version of this valve may be a solution.
- Direct-acting and pilot-operated versions of these valves are interchangeable. They fit the same cavities and have the same flow paths.
- Port 3 can be blocked to prevent the valve from shifting.
- This valve is not bistable; it is capable of modulating between the two positions shown.
- Maximum pressure at port 3 should be limited to 3000 psi (210 bar). This is due to fatigue strength limits not hydraulic operating limits.
- When pilot pressure exceeds the valve setting, pilot flow may be a consideration. See performance curves for pilot consumption vs. load pressure above the valve setting. If this is a problem, the direct acting version of this valve would be a solution.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-2A	
Capacity	15 gpm	60 L/min.
Control Pilot Flow	10 - 15 in ³ /min.	0,16 - 0,25 L/min.
Factory Pressure Settings Established at	4 gpm	15 L/min.

Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	1 in ³ /min.@1000 psi	15 cc/min.@70 bar
Series (from Cavity)	Series 2	
Adjustment - Number of Clockwise Turns to Increase Setting	5	
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm
Seal Kits - Cartridge	Buna: 990-202-007	
Seal Kits - Cartridge	Viton: 990-202-006	
Model Weight	0.60 lb.	0.27 kg.

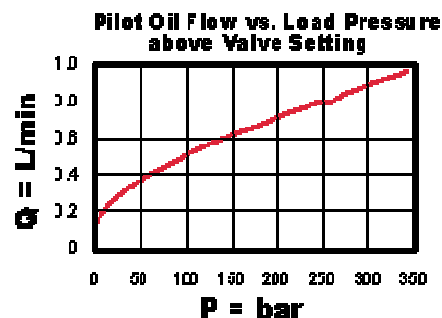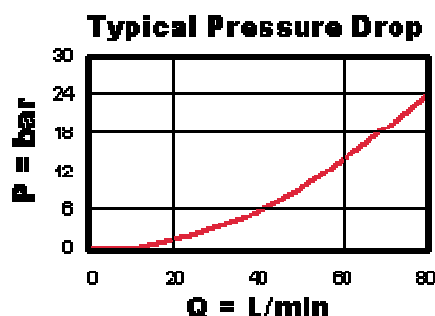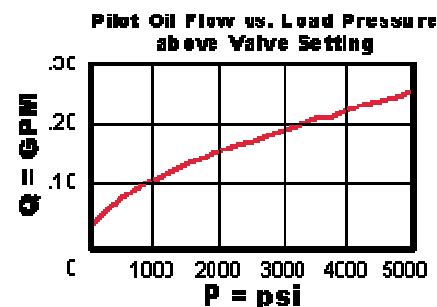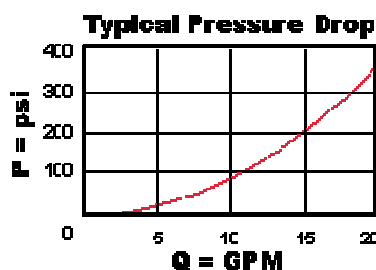

DPCD-LAN

Control

Standard Options

- C*** Tamper Resistant - Factory Set
- K** Handknob
- L** Standard Screw Adjustment

Adjustment Range

Standard Options

- A** 100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting
- B** 50 - 1500 psi (3,5 - 105 bar), 1000 psi (70 bar) Standard Setting
- D** 25 - 800 psi (1,7 - 55 bar), 400 psi (28 bar) Standard Setting
- E** 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting
- W** 150 - 4500 psi (10,5 - 315 bar), 1000 psi (70 bar) Standard Setting

Seal Material

Standard Options

- N** Buna-N
- V** Viton

Material/Coating Modifier

Preferred Options

No modifier (standard material with no special coating)

Special Options

/AP Stainless Steel, Passivated

Control: C

Control: L

Our corrosion resistant product line is growing! If you are interested in a corrosion resistant option for this model, please contact Sun.

When the modifier is /AP, the control must be C or L

* Special Setting required, specify at time of order
Customer specified setting stamped on hex.