



3-way, direct-acting, fixed setting, directional valve with drain to port 4 (3 to 4 open, port 2 blocked)

Functional Group:



Products : Cartridges : Directional; DP, DR**, DV** : 3 Way - 4 Port - 3 to 4 Open, Port 2 Blocked : Direct Acting - Fixed Setting**

Capacity:
7 gpm (28 L/min.)

Model:
DRBRX

Product Description

Direct-acting, 3-way directional cartridges (3 to 4 open, 2 blocked) are switching devices typically used in moderate flow circuits. They can be used by themselves or to actuate larger pilot operated directional cartridges or logic cartridges. The valve shifts when the pressure differential between port 1 and port 4 exceeds the setting.

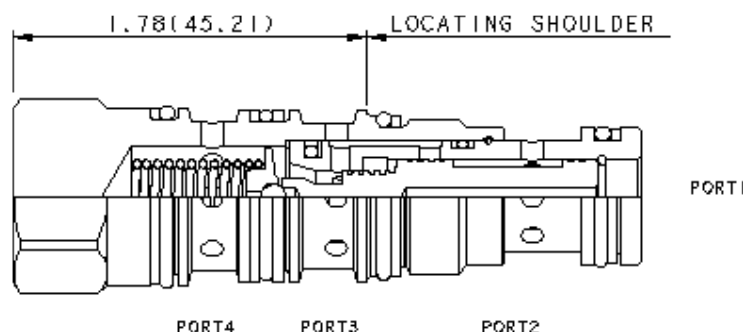


Technical Features

- The flow path between port 2 and port 3 is bidirectional.
- Because of their direct-acting design, these cartridges feature low internal leakage and low pilot flow consumption.
- Pressure at port 4 is directly additive to the setting of the valve.
- This valve is not bistable; it is capable of modulating between the two positions shown.
- Maximum pressure at port 3 should be limited to 3000 psi (210 bar). This is due to fatigue strength limits not hydraulic operating limits.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-21A	
Capacity	7 gpm	28 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	2 in ³ /min.	30 cc/min.
Series (from Cavity)	Series 1	
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	40 - 50 Nm
Seal Kits - Cartridge	Buna: 990-021-007	
Seal Kits - Cartridge	Viton: 990-021-006	
Model Weight	0.33 lb.	0.15 kg.

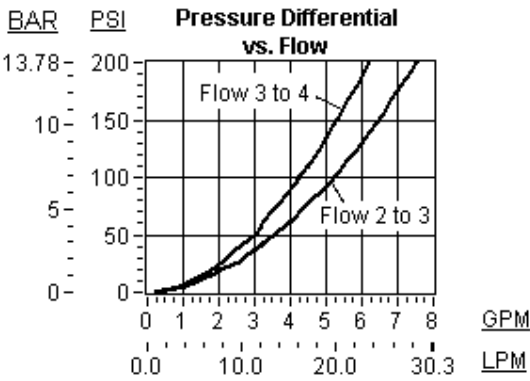

DRBR-XFN

Shifting Pressure		Seal Material	
Standard Options		Standard Options	
F	100 psi (7 bar)	N	Buna-N
		V	Viton