



Low side, 3-position, hot oil shuttle valve

Capacity:
20 gpm (80 L/min.)

Functional Group:



Products : Cartridges : Shuttle Valve : 4-Port : Low Side (Hot Oil), 3 Position

Model:

DSEH

Product Description

Low-side (hot oil) shuttle cartridges allow hot oil to be diverted from the low pressure side of a closed loop system. When both work ports (ports 2 and 4) are at equal pressures the valve is spring-centered to an all-ports-blocked position. When one of the work ports (port 2 or 4) sees a higher pressure the opposite work port is connected to the common port (port 3).

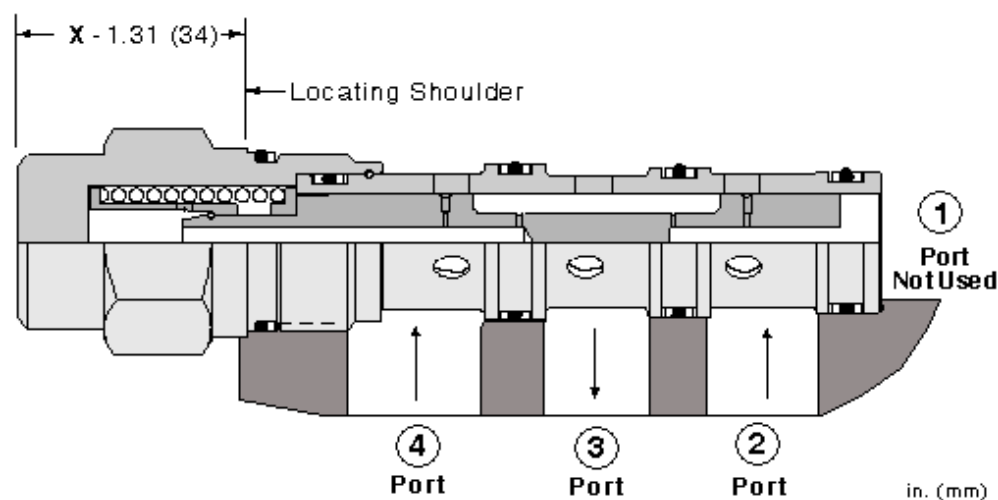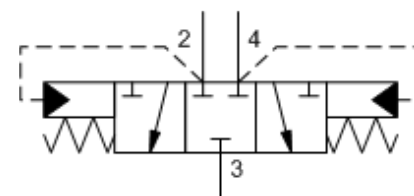


Technical Features

- The spool incorporates a hydraulic stop that eliminates mechanical impact and therefore the potential for internal damage.
- The hydraulic stop results in a small pilot flow from the high side work port (port 2 or 4) to the common port (port 3).
- A unique feature due to the hydraulic stop is that the hot oil relief setting can be confirmed with the transmission in neutral.
- NOTE: Low shift values can potentially result in charge pump pressure alone inadvertently shifting the valve. Use care when selecting shift pressure.
- Although this valve goes into a 4-port cavity, the nose (port 1) is not used.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-32A	
Capacity	20 gpm	80 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Pilot Flow	23 in ³ /min.	0,38 L/min.
Series (from Cavity)	Series 2	
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Seal Kits - Cartridge	Buna: 990-032-007	
Seal Kits - Cartridge	Viton: 990-032-006	
Model Weight	0.71 lb.	0.32 kg.

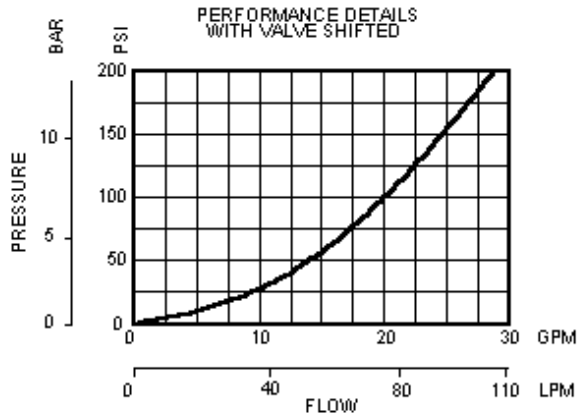

DSEH-XHN

Control	Shifting Pressure	Seal Material
Standard Options	Standard Options	Standard Options
X Not Adjustable	G 150 psi (10,5 bar) H 200 psi (14 bar)	N Buna-N V Viton
Additional Options (Click Here)		
Control	Shifting Pressure	Seal Material
	D 50 psi (3,5 bar) E 75 psi (5 bar)	