



3-way, vent-to-operate, directional valve with internal drain to port 3 and integral T-8A control cavity (1 to 2 open, 3 blocked)

Functional Group:

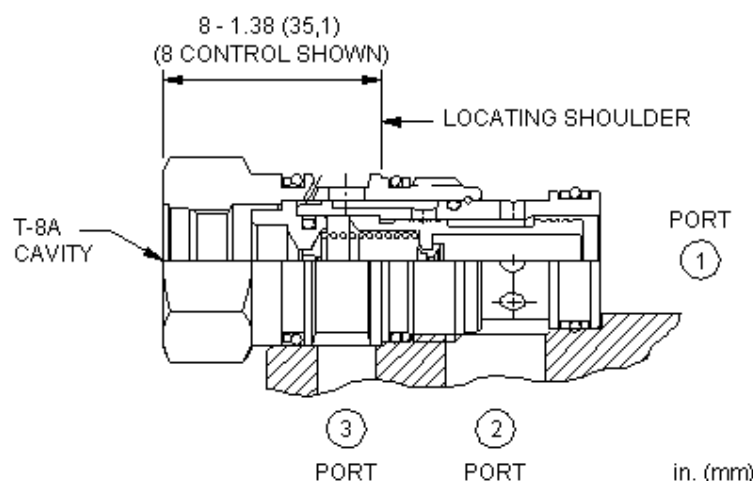
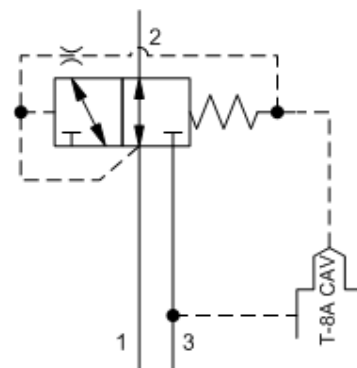
Products : Cartridges : Directional; DP, DR**, DV** : 3 Way - 3 Port - 1 to 2 Open, 3 Blocked : Integral T-8A Control Cavity**

Capacity:
15 gpm (60
L/min.)

Model:
DVCD

Product Description

This valve is a, 3-way directional cartridge (1 to 2 open, 3 blocked) that incorporates an integral pilot control cavity. It may be used by itself or to actuate larger pilot-operated directional cartridges or logic elements. The valve shifts when there is flow through the pilot control cartridge installed in the T-8A cavity.

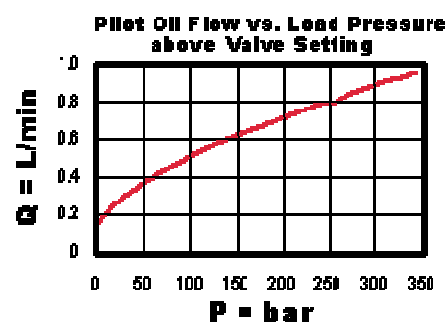
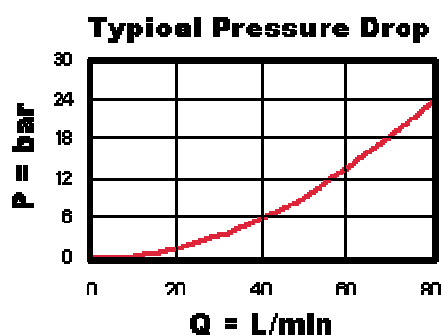
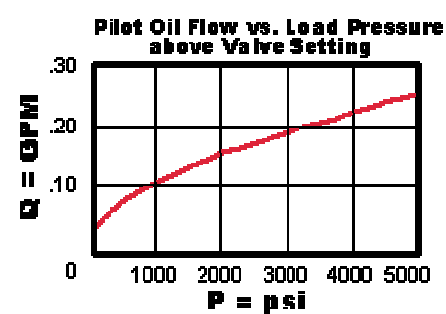
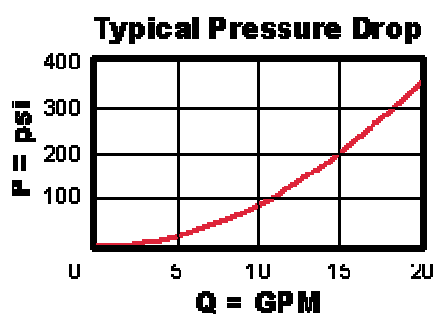


Technical Features

- NOTE: The main stage valve should first be installed to the correct torque value followed by the T-8A pilot control section into the main stage valve to its required torque value.
- This valve is not bistable; it is capable of modulating between the two positions shown.
- The flow path between port 1 and port 2 is bidirectional.
- Pressure at port 3 may oppose the opening of the valve. Because of this, port 3 may not be useable as a work port in your circuit. If this is a consideration, the 4 port version of this valve may be a solution.
- There must be a pressure source at port 1, relative to port 3, to shift the valve.
- The -8 control option allows the pilot control valve to be incorporated directly into the end of the directional cartridge via the T-8A cavity. These pilot control cartridges are sold separately and include solenoid operation, air pilot operation, and hydraulic pilot operation. See Pilot Control Cartridges.
- Leakage listed in technical data is for each path.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-2A	
Capacity	15 gpm	60 L/min.
Control Pilot Flow	10 - 15 in ³ /min.	0,16 - 0,25 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	2 in ³ /min.@1000 psi	30 cc/min.@70 bar
Pilot Control Cavity	T-8A	
Series (from Cavity)	Series 2	
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Seal Kits - Cartridge	Buna: 990-202-007	
Seal Kits - Cartridge	Viton: 990-202-006	
Model Weight	0.41 lb.	0.19 kg.

**DVCD-8FN****Control****Standard Options****8** T-8A Cavity**Minimum Control Pressure****Standard Options****F** 100 psi (7 bar)**Seal Material****Standard Options**

N Buna-N
V Viton