



2-way, vent-to-operate, directional valve with drain to port 4 and integral T-8A control cavity - normally open

Functional Group:

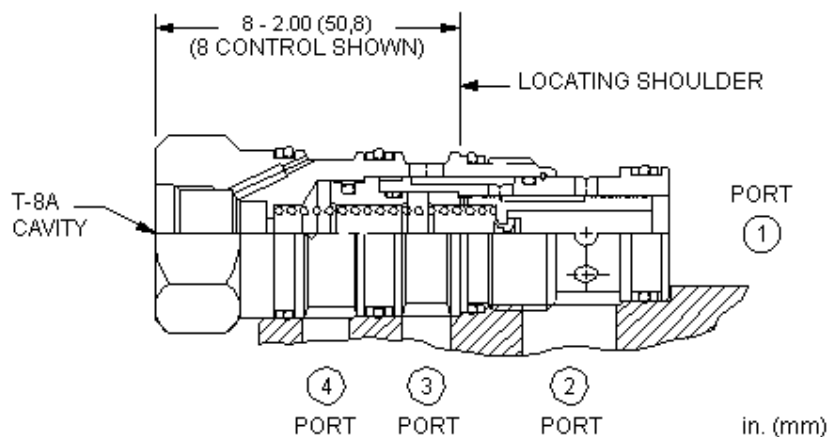
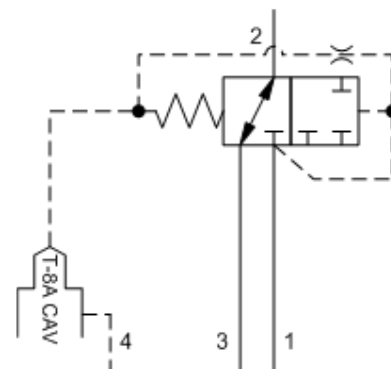
Products : Cartridges : Directional; DP, DR**, DV** : 2 Way - 4 Port - Normally Open : Integral T-8A Control Cavity**

Capacity:
15 gpm (60 L/min.)

Model:
DVCM

Product Description

This valve is a normally open, 2-way directional cartridge that incorporates an integral pilot control cavity. It may be used by itself or to actuate larger pilot-operated directional cartridges or logic elements. The valve shifts when there is flow through the pilot control cartridge installed in the T-8A cavity.

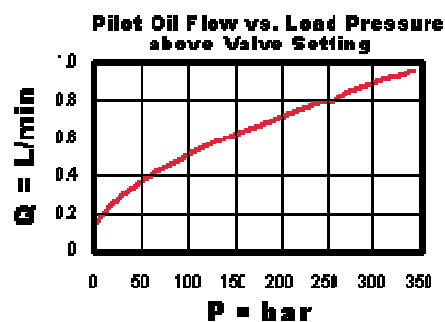
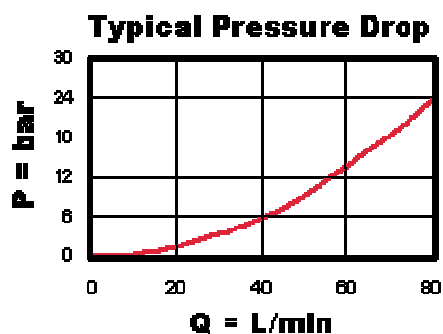
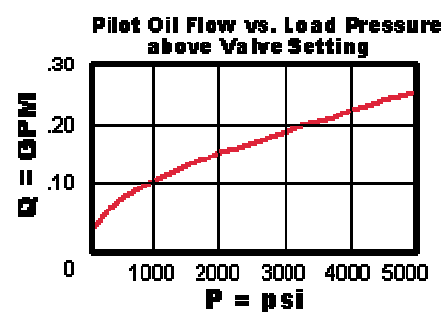
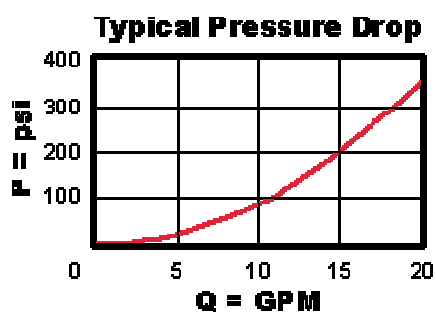


Technical Features

- Port 3 can be used as a work port.
- The flow path between port 2 and port 3 is bidirectional.
- NOTE: The main stage valve should first be installed to the correct torque value followed by the T-8A pilot control section into the main stage valve to its required torque value.
- This valve is not bistable; it is capable of modulating between the two positions shown.
- There must be a pressure source at port 1, relative to port 4, to shift the valve.
- The -8 control option allows the pilot control valve to be incorporated directly into the end of the directional cartridge via the T-8A cavity. These pilot control cartridges are sold separately and include solenoid operation, air pilot operation, and hydraulic pilot operation. See Pilot Control Cartridges.
- Leakage listed in technical data is for each path.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-22A	
Capacity	15 gpm	60 L/min.
Control Pilot Flow	7 - 10 in ³ /min.	0,11 - 0,16 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	2 in ³ /min.@1000 psi	30 cc/min.@70 bar
Pilot Control Cavity	T-8A	
Series (from Cavity)	Series 2	
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Seal Kits - Cartridge	Buna: 990-022-007	
Seal Kits - Cartridge	Viton: 990-022-006	
Model Weight	0.54 lb.	0.24 kg.

**DVCM-8FN**

Control	Minimum Control Pressure	Seal Material
Standard Options	Standard Options	Standard Options
8 T-8A Cavity	F 100 psi (7 bar)	N Buna-N
		V Viton