
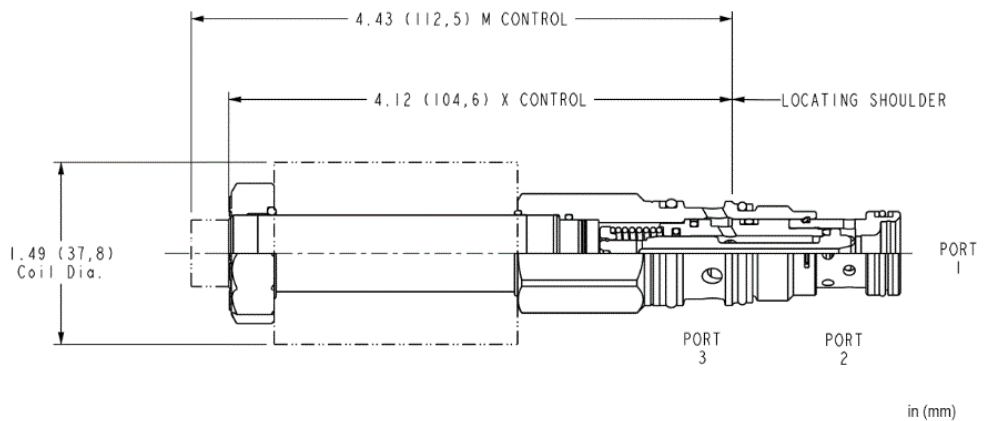





This solenoid-operated 3-way, 2-position cartridge is a direct-acting, poppet-style directional valve. The valve is normally open between port 1 and port 2 with port 3 blocked. Energizing the valve connects port 2 to 3 and blocks port 1. All flow paths are bidirectional and blocked paths are blocked in both directions. Due to the poppet style construction, this valve has extremely low leakage.

This valve is designed to be used with FLeX Series coils.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-11A
Series	1
Capacity	30 L/min.
Maximum Operating Pressure	350 bar
Response Time - Typical	50 ms
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Manual Override Force Requirement	33 N/100 bar @ Port 1
Manual Override Stroke	2,5 mm
Switching Frequency	15,000 max. cycles/hr
Solenoid Tube Diameter	16 mm
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Seal kit - Cartridge	Buna: 990411007
Seal kit - Cartridge	Viton: 990411006
Model Weight	0.23 kg.

NOTES

- Please verify cartridge clearance requirements when choosing a Sun manifold. Different valve controls and coils require different clearances.
- An additional 2.00 inches (50,8 mm) beyond the valve extension is needed for coil installation and removal.

CONFIGURATION OPTIONS

Model Code Example: **DWDFXAN**


CONTROL	(X)	POPPET CONFIGURATION	(A)	SEAL MATERIAL	(N)	COIL *
X No Manual Override		A Normally Open 1 to 2, Closed 2 to 3		N Buna-N		No coil
M Manual Override				V Viton		* Additional coil options are available

TECHNICAL FEATURES

- The solenoid tube assembly is fatigue rated for 5000 psi (350 bar) service.
- This valve is direct actuated and requires no minimum hydraulic pressure for operation.
- This cartridge has an option for manual override. See the CONFIGURATION section.
- This valve is suitable for load holding applications on port 3 only. In the event of power failure, the valve would spring closed.
- All configurations of this valve include zinc-nickel plating as standard for 1000-hour salt fog protection.
- Coil connector options offer ratings up to IP69K. See individual coil product pages for details.
- This cartridge utilizes both FLeX high-power and hazardous location coils.
- Valves exhibit extremely low leakage rates; less than 10 drops/min. @ 5000 psi (0,7 cc/min @ 350 bar).
- A FULL DATA SHEET is available for this model using the link at the top of the page.
- This valve utilizes a wet armature design. This means that the working fluid surrounds the armature and is exposed to the heat generated by the coil. This can be a factor if the coil is energized for long periods of time. Some fluids, notably water/glycol mixtures, break down at these temperatures over time and form varnishes that will affect the function of the cartridge.
- A wide variety of coil termination and voltage options are available, with and without surge protection. See the CONFIGURATION section.
- The solenoid's unique magnetic design results in a high efficiency solenoid, yielding high spool actuating force per Watt expended, leading to reliable valve shifting.
- Coils can be mounted on the tube in either direction.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

DWDF

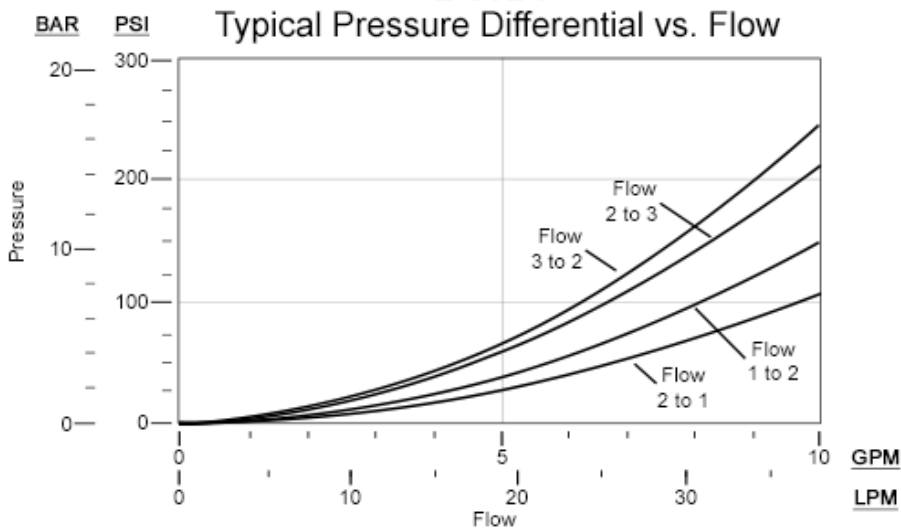

DWDF

Valve Performance Limits @ 15% Undervoltage & Stabilized Coil Temperature

