





3-way, manually-operated, directional poppet valve

Capacity:
7.5 gpm (30 L/min.)

Model:
DWDM

Product Description

This manually operated, 2-position, 3-way directional cartridge is a direct-acting, poppet-style valve used to control the direction of flow in a hydraulic circuit. The valve is normally open between port 1 and port 2 with port 3 blocked. Operating the valve connects port 2 to 3 and blocks port 1. All flow paths are bidirectional and blocked paths are blocked in both directions. The poppet style construction makes it well suited for load holding or load blocking applications. Manual operation is achieved via Sun's Twist/Lock manual override mechanism and is designed for intermittent (infrequent) use only.

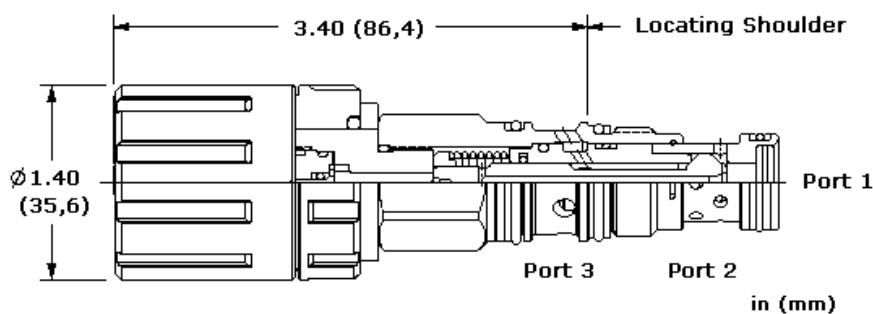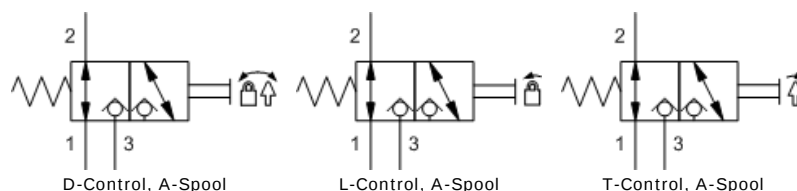


Technical Features

- This valve is designed for intermittent use such as a manual override. The manual control assembly has a mechanical life expectancy of about 10,000 cycles.
- The momentary/twist control option "T" allows the operator to momentarily shift the valve by twisting the knob clockwise and releasing. Once released, the valve returns to its normal position.
- The detent/lock control option "L" allows the operator to shift the valve into a mechanically detented position by twisting the knob counter-clockwise. This detented position will be maintained until the operator twists the knob clockwise and allows the valve to return to its normal position.
- The dual-operation control option "D" allows the operator to either shift the valve momentarily by twisting the knob clockwise or shift it into a mechanically detented position by twisting counter-clockwise.
- The control on this valve is meant to be operated by a person's hand. The control should not be modified, for instance fastening a lever to the knob. Under no circumstances should the control be operated by other mechanical devices.
- Valves exhibit extremely low leakage rates; less than 10 drops/min. @ 5000 psi (0,7 cc/min @350 bar).
- Suitable for load holding applications.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-11A	
Capacity	7.5 gpm	30 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.@5000 psi	0,7 cc/min.@350 bar
Operating Torque	10 lbf in.	1,2 Nm
Series (from Cavity)	Series 1	

Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	40 - 50 Nm
Seal Kits - Cartridge	Buna: 990-411-007	
Seal Kits - Cartridge	Viton: 990-411-006	
Model Weight	0.77 lb.	0.35 kg.

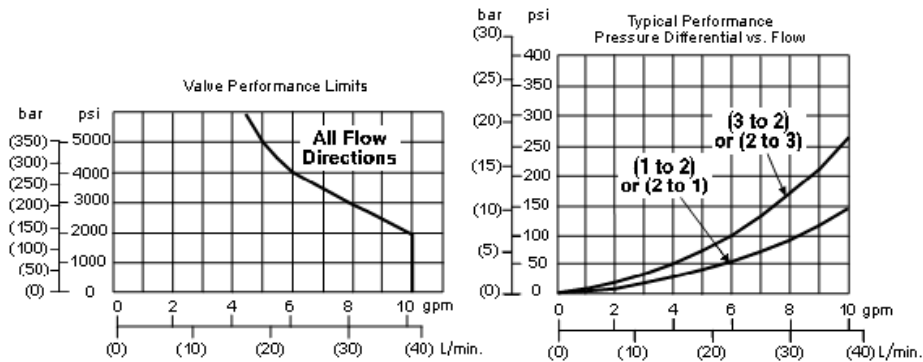

DWDM-LAN

Control	Spool Configuration	Seal Material
Standard Options	Standard Options	Standard Options
D Twist/Lock (Dual) Manual Override	A Normally Open 1 to 2, Closed 2 to 3	N Buna-N
L Twist/Lock (Detent) Manual Override		V Viton
T Twist (Momentary) Manual Override		