
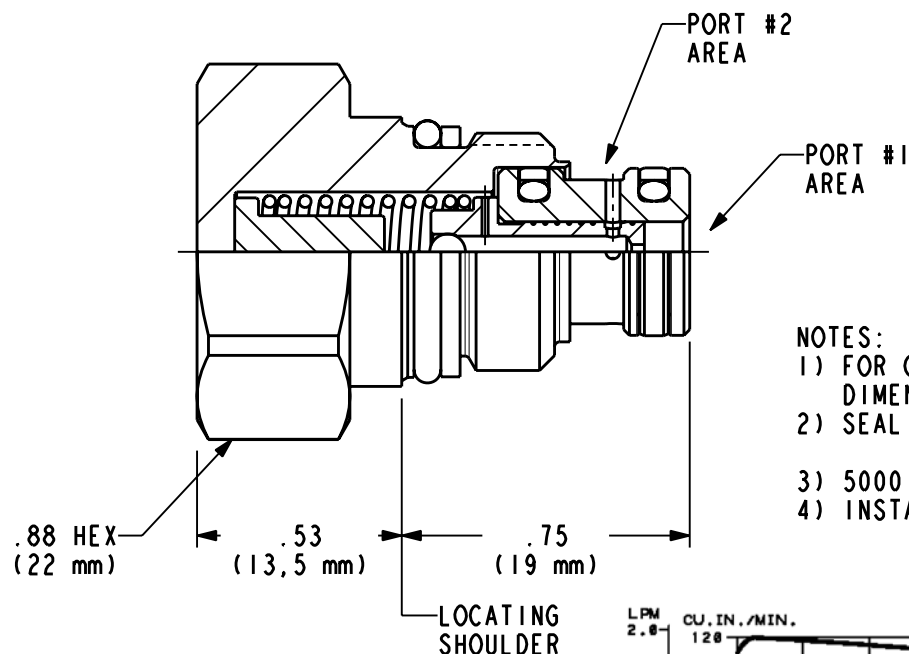


REV. A	PART NO. FXAA X**
--------	-------------------



NOTES:


- 1) FOR CAVITY DIMENSIONS, SEE T-8A DIMENSIONS, TOOLING, & PORTING DRAWING.
- 2) SEAL KITS: 990-008-007 (BUNA-N)
990-008-006 (VITON)
- 3) 5000 PSI MAXIMUM SYSTEM PRESSURE.
- 4) INSTALLATION TORQUE: 20-25 LB-FT MAX.
(27-33 Nm)

MODEL OPTIONS
FXAA X**

SEALS
BUNA - N
VITON

NOMINAL FLOW RATE

- | | | | |
|---|---|-----|--|
| A | - | 15 | CU. IN. /MIN. (0,246 L/MIN.) |
| | | | +/- 2.0 CU. IN. /MIN. (+/- 32 CC/MIN.) |
| B | - | 20 | CU. IN. /MIN. (0,327 L/MIN.) |
| | | | +/- 2.5 CU. IN. /MIN. (+/- 40 CC/MIN.) |
| D | - | 40 | CU. IN. /MIN. (0,655 L/MIN.) |
| | | | +/- 3.0 CU. IN. /MIN. (+/- 48 CC/MIN.) |
| F | - | 60 | CU. IN. /MIN. (0,953 L/MIN.) |
| | | | +/- 3.0 CU. IN. /MIN. (+/- 48 CC/MIN.) |
| H | - | 80 | CU. IN. /MIN. (1,31 L/MIN.) |
| | | | +/- 4.0 CU. IN. /MIN. (+/- 64 CC/MIN.) |
| J | - | 100 | CU. IN. /MIN. (1,64 L/MIN.) |
| | | | +/- 4.0 CU. IN. /MIN. (+/- 64 CC/MIN.) |
| L | - | 120 | CU. IN. /MIN. (1,97 L/MIN.) |
| | | | +/- 4.5 CU. IN. /MIN. (+/- 72 CC/MIN.) |

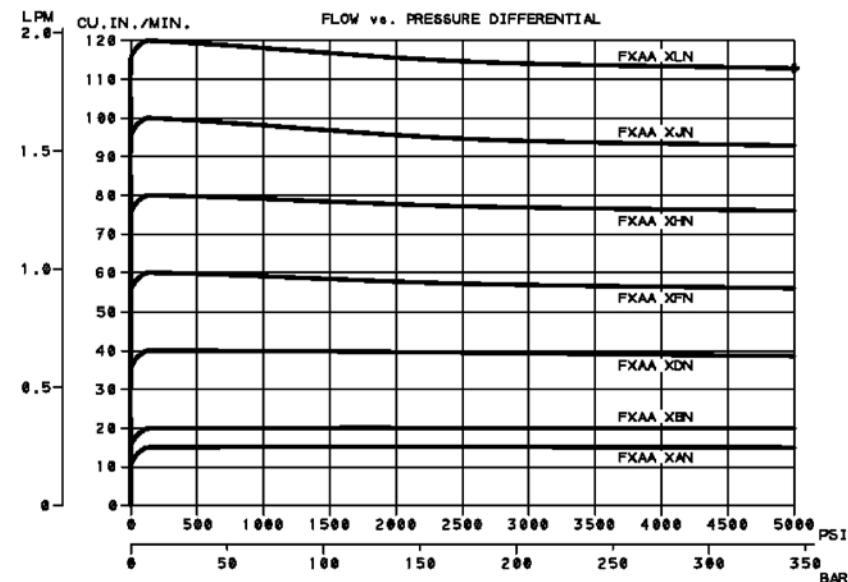[illegible]