
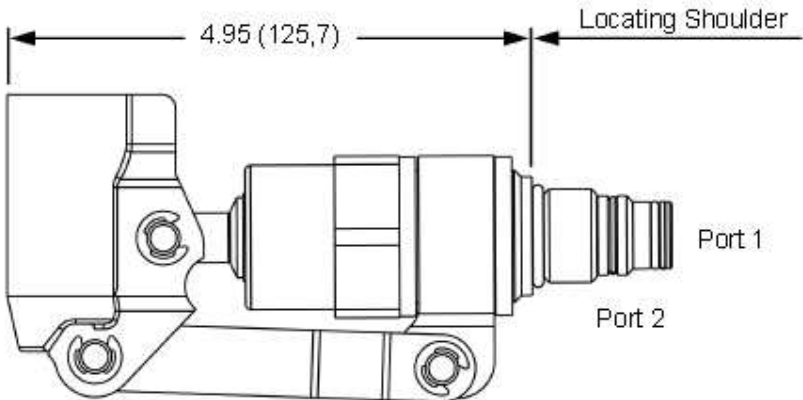




in (mm)

*Mating handle (991-295-109)
sold separately.
0.84 (21,3) Dia.

This valve is a screw-in, manual hand pump cartridge with dual integrated check valves.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	SC-10-02
Series	1C
Capacity	.442 in³
Maximum Operating Pressure	210 bar
Valve Hex Size	38,1 mm
Valve Installation Torque	61 - 68 Nm
Seal kit - Cartridge	Buna: 99C102007
Seal kit - Cartridge	Viton: 99C102006

CONFIGURATION OPTIONS

Model Code Example: HPUAXXN

CONTROL	(X)	SPOOL CONFIGURATION	(X)	SEAL MATERIAL	(N)
X Mechanical Actuation		X -		N Buna-N	

TECHNICAL FEATURES

- This valve features dual integrated check valves.
- The lever socket rotates 360°.
- Zinc plated to ASTM specifications for 240 hours of salt spray resistance.
- The seat is made from hardened steel for durability.
- The mating handle is sold separately.