

Ports:

1, 2 = G3/4"

3 = G1/2"

4 = G1/4"


Other flow ranges / drawings:

Serie 1 - 23lpm - L02654



Serie 2 - 45lpm - L02656*

Serie 3 - 95lpm - L02658

Serie 4 - 200lpm - L02660




Port 1 G3/4"

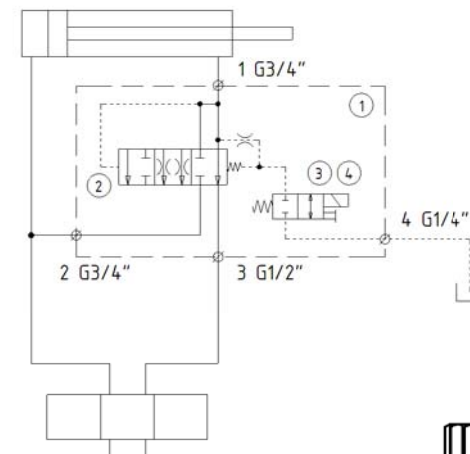

Port 3 G1/2"


x2 Ø10,6 ∇ through

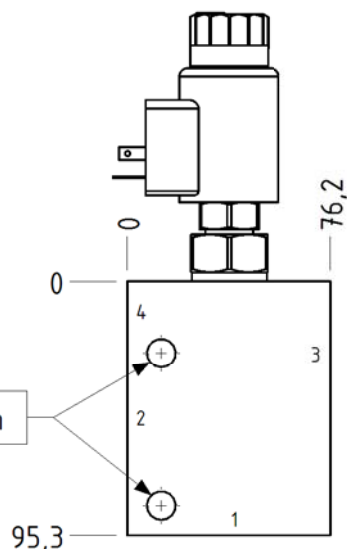

Port 4 G1/4"

Port 2 G3/4"

~197

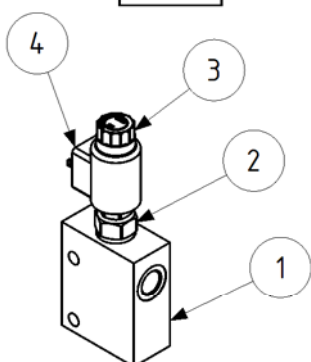

SCALE 1 : 4



Pos. 4 can be exchanged to another voltage and/or contact type (i.e. Deutsch)

Pos. 3 can be exchanged to normally open and/or soft shift version

4	1	770-224	Solenoid 770-224 24VDC	270-0006	0,3	0,5 Nm
3	1	DAAL-MCN	Directional valve T-8A	260-0045	0,21	35-40 Nm
2	1	FVDA-8IN T-22A	Prioritetsventil ventstyrtd	212-0489	0,24	60-70 Nm
1	1	NAW/S T-22A	Ventilhus G3/4"	222-1209	1,4	2 x M10
#	Qty	Part Number	Description	Hydnet art nr	[kg]	Installation
ISO 2768-1 Medium, Ra=3,2µm			Material	Heat treat, finish	Status	Dimensions
□ Stamp framed text on surface, height = 4mm.			SG Iron	-	RELEASED	~95x76x38
Sharp edges chamfered.					Design OBD	Net. weight ~3 kg
					Drawn OBD	See drawing 3D02655
					Check PIL	
					Title	Scale 1:2
					Regenerativ krets	Size A3
					Serie 2 45lpm, elstyrtd	Created date 2011-09-13
						Drawing L02656.icd
						Sheet 1(1)
						Rev. -