

Pilot-to-close, spring biased closed, unbalanced poppet logic element

Capacity:
300 gpm (1100 L/min.)

Functional Group:



Products : Cartridges : Logic Element : Unbalanced Poppet : Pilot-to-close, Spring Biased Closed

Model:

LOKC

Product Description

These unbalanced, pilot-to-close logic valves are 2-way switching elements that are spring biased closed. Pressure at either work port 1 or 2 will oppose the spring and tend to open the valve while pressure at port 3 will tend to close it. The force generated at port 3, plus the spring force, must be greater than the sum of the forces acting at port 1 and port 2 for the valve to remain closed. NOTE: The pilot area (port 3) is 1.8 times the area at port 1 and 2.25 times the area at port 2.

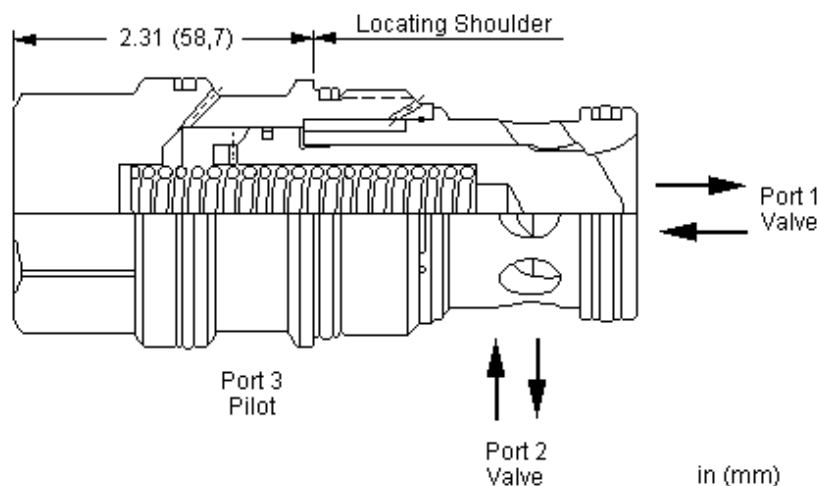


Technical Features

- These valves will work in Sun's standard T-19A cavity at lower capacity. To realize the full stated capacity, the T-19AU cavity should be used.
- These valves have positive seals between port 2 and the pilot area.
- Because these valves are unbalanced, operation is pressure dependent. Opening and closing of the poppet are functions of the force balances on three areas: Port 1 = 100%, Port 2 = 80%, and the Pilot Area = 180%.
- These valves are pressure responsive at all ports, therefore it is essential to consider all aspects of system operation through a complete cycle. Pressure changes at any one port may cause a valve to switch from a closed to an open position, or vice versa. All possible pressure changes in the complete circuit must be considered to assure a safe, functional system design.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.


Technical Data

	U.S. Units	Metric Units
Cavity	T-19AU	
Capacity	300 gpm	1100 L/min.
Area Ratio, A3 to A1	1.8:1	
Area Ratio, A3 to A2	2.25:1	
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.	0,7 cc/min.
Pilot Passage into Valve	.09 in.	2,3 mm
Pilot Volume Displacement	.47 in ³	7,7 cc
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm
Seal Kits - Cartridge	Buna: 990-019-007	
Seal Kits - Cartridge	Viton: 990-019-006	
Model Weight	2.56 lb.	1.16 kg.

Model LOKC installed in T-19A Cavity

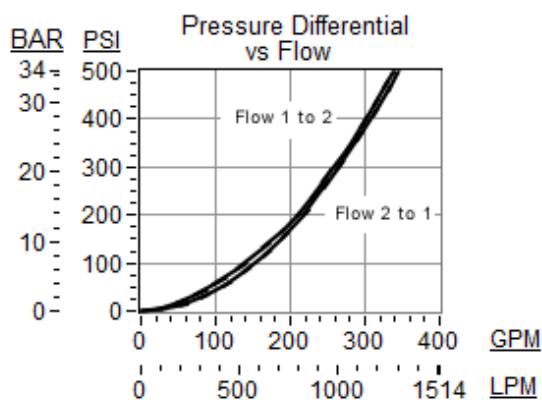

Model LOKC installed in T-19AU Cavity

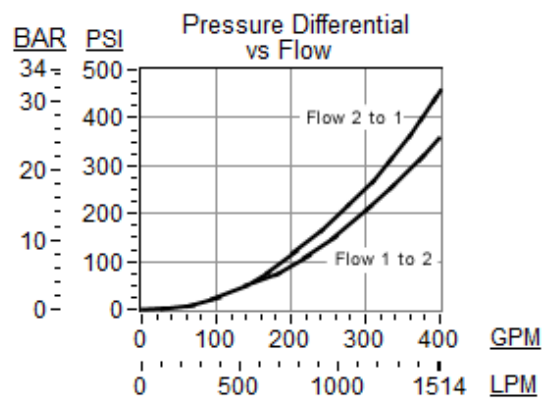**LOKC-XDN****Control****Cracking Pressure****Seal Material****Standard Options****Standard Options****Standard Options****X** Not Adjustable**D** 50 psi (3,5 bar)**N** Buna-N**V** Viton**Additional Options****Control****Cracking Pressure****Seal Material****X** No Spring 0 psi (0 bar)