



Normally closed, modulating element with pilot source from port 1

Capacity:
120 gpm (480 L/min.)

Functional Group:



Products : Cartridges : Logic Element : Modulating : Normally Closed, Pilot Source from port 1

Model:

LRJA

Product Description

Normally closed modulating elements with an internal orifice between port 1 and port 3 can be used as a main-stage relief valve. The valve can be controlled remotely using a pilot relief or pilot solenoid valve.

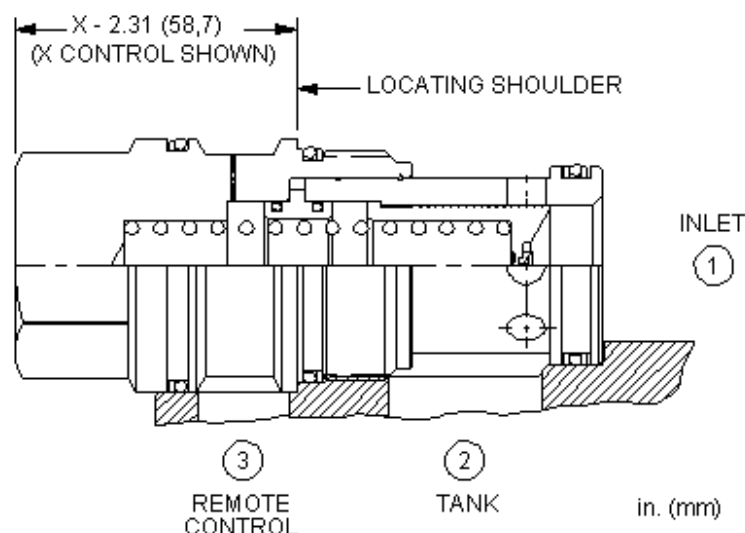

Technical Features

- An optional tuning adjustment (L control) is offered to vary the pressure drop across the compensator to increase/decrease flow. This option is only available with the D spring option (50 psi [3,5 bar]).
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP (see Option Selection below). The bodies of these valves are made from high strength lean duplex stainless steel. Adjustment screws are made from titanium or silicon brass, depending on the model. Lock nuts, retaining wires, and assorted controls are made from 316 stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard valves.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-19A	
Capacity	120 gpm	480 L/min.
Control Orifice Diameter	.021 in.	0,53 mm
Control Pilot Flow	15 - 30 in ³ /min.	0,25 - 0,50 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm
Seal Kits - Cartridge	Buna: 990-019-007	
Seal Kits - Cartridge	Viton: 990-019-006	
Model Weight	2.55 lb.	1.16 kg.

LRJA-XHN**Control****Differential Pressure****Seal Material****Material/Coating
Modifier****Standard Options****Standard Options****Standard Options****Preferred Options****X** Not Adjustable**A** 12 psi**B** 20 psi (1,5 bar)**C** 30 psi (2 bar)**D** 50 psi (3,5 bar)**H** 200 psi (14 bar)**N** Buna-N**V** Viton**No modifier** (standard material with no special coating)**Special Options****/AP** Stainless Steel, Passivated

Control: X

Our corrosion resistant product line is growing! If you are interested in a corrosion resistant option for this model, please contact Sun.

When the modifier is /AP, the control must be X