





Fully adjustable needle valve with reverse flow check

Capacity:
.28 in. (7,1 mm)

Model:
NCFC

Product Description

Needle valves with reverse-flow check are fully adjustable orifices used to regulate flow. They are infinitely adjustable from fully closed up to the maximum orifice diameter. An integral high-capacity check valve provides unrestricted flow from port 2 to port 1. They are not pressure-compensated.

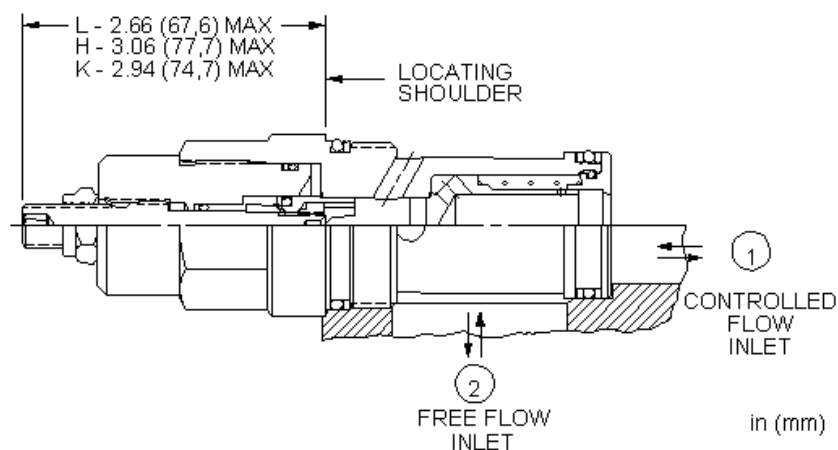





Technical Features

- All 2-port flow control cartridges are physically and functionally interchangeable (i.e. same flow path, same cavity for a given frame size). However, cartridge extension dimensions from the mounting surface may vary.
- Because needle valves are non-compensating devices, the fixed orifice size will regulate flow through the valve in proportion to the square root of the pressure differential across ports 1 and 2.
- A balanced adjustment mechanism allows for easy adjustment even at high pressures.
- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-16A	
Capacity	.28 in.	7,1 mm
Adjustment - Number of Counterclockwise Turns - Fully Closed to Fully Open	5	
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	5 drops/min.	0,3 cc/min.
Series (from Cavity)	Series 3	
Valve Hex Size	1 1/4 in.	31,8 mm
Valve Installation Torque	150 - 160 lbf ft	200 - 215 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm

Seal Kits - Cartridge	Buna: 990-016-007
Seal Kits - Cartridge	Viton: 990-016-006
Model Weight	1.27 lb. 0.58 kg.

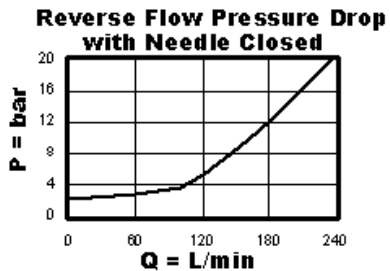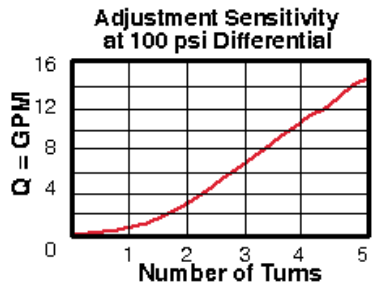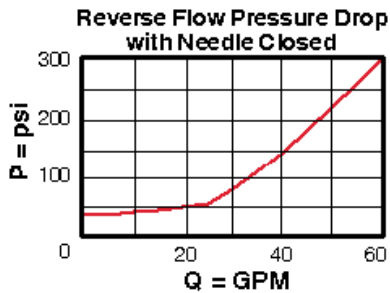

NCFC-LCN

Control	Reverse Flow Check	Seal Material
Preferred Options	Preferred Options	Preferred Options
L Standard Screw Adjustment	C 30 psi (2 bar)	N Buna-N
Standard Options	Standard Options	Standard Options
H Calibrated Handknob with Detent Lock	A 4 psi (0,3 bar)	V Viton
K Handknob	E 75 psi (5 bar)	
Additional Options		
Control	Reverse Flow Check	Seal Material
	B 15 psi (1 bar)	
	D 50 psi (3,5 bar)	