





Electro-proportional, direct-acting, pressure reducing/relieving valve with open transition - high pressure setting with no command

Capacity:
5 gpm (20
L/min.)
Model:
PRDM

Product Description

This electro-proportional, direct-acting reducer/reliever valve reduces a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, with a full flow relief function from port 1 to tank (port 3). The valve is biased to the reducing mode, connecting port 2 to port 1 at a customer specified pressure setting. Increasing the current to the coil will proportionally decrease the reduced pressure at port 1. If pressure at port 1 exceeds the setting induced by the coil, pressure at port 1 is relieved to port 3. This valve is open in the transition from reducing to relieving. It provides good pressure control and dynamic response.

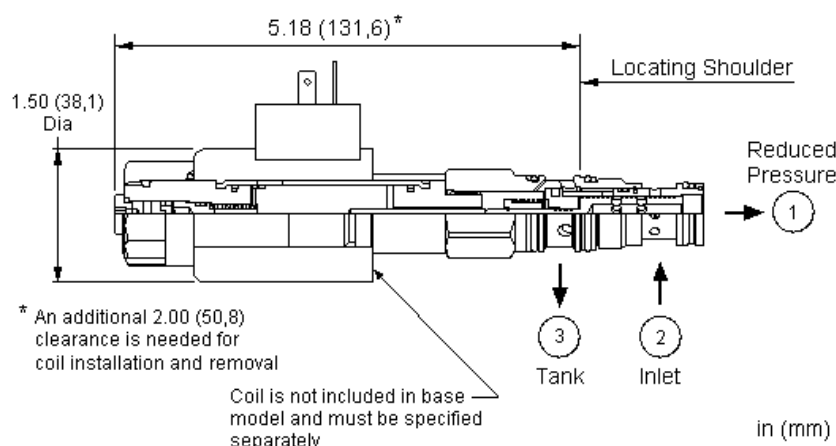







Technical Features

- Maximum pressure at port 3 should be limited to 3000 psi (210 bar).
- Pressure at port 3 is directly additive to the valve setting at a 1:1 ratio and should not exceed 3000 psi (210 bar).
- The transition from reducing to relieving is slightly open. The result is very good pressure control with oil consumption of about 0.1 gpm (0.4 L/min.).
- For optimum performance, an amplifier with current sensing and adjustable dither should be used. Dither should be adjustable between 100 - 250 Hz.
- Coils are interchangeable with Sun's other full flow, solenoid-operated valves and can be mounted on the tube in either direction.
- With no electrical signal, the reduced pressure setting will default to the customer specified value. Increasing the command to the coil will proportionally reduce the secondary pressure value.
- Direct acting concept provides highly reliable operation in contaminated systems, especially at dead headed conditions.
- All three-port pressure reducing and reducing/relieving cartridges are physically interchangeable (i.e. same flow path, same cavity for a given frame size). When considering mounting configurations, it is sometimes recommended that a full capacity return line (port 3) be used with reducing/relieving cartridges.
- Full reverse flow from reduced pressure (port 1) to inlet (port 2) may cause the main spool to close. If reverse free flow is required in the circuit, consider adding a separate check valve to the circuit.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-11A	
Capacity	5 gpm	20 L/min.
Hysteresis (with dither)	<4%	
Hysteresis with DC input	<8%	






Linearity (with dither)	<2%	
Repeatability (with dither)	<2%	
Recommended dither frequency	140 Hz	
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	20 in ³ /min.	0,33 L/min.
Series (from Cavity)	Series 1	
Solenoid Tube Diameter	.75 in.	19 mm
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	40 - 50 Nm
Model Weight (with coil)	1.20 lb	0,55 kg
Seal Kits - Cartridge	Buna: 990-511-007	
Seal Kits - Cartridge	Viton: 990-511-006	
Seal Kits - Coil	Viton: 990-770-006	
Model Weight	0.88 lb.	0.40 kg.

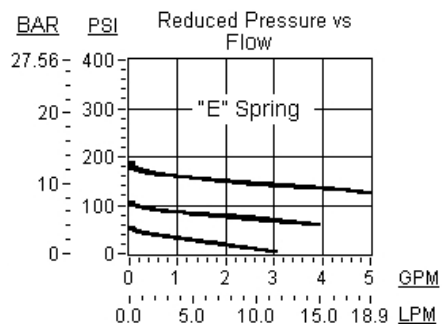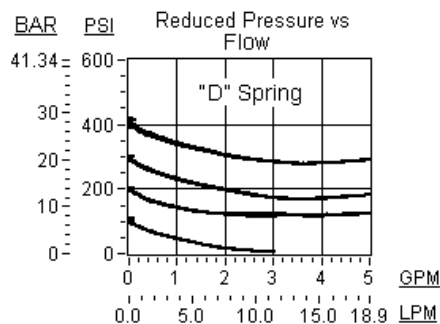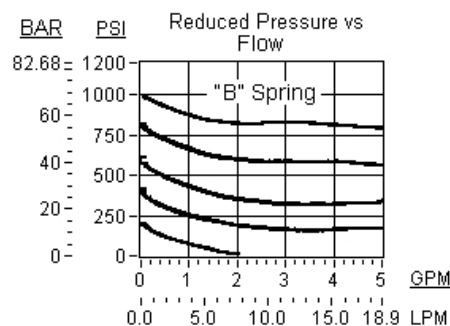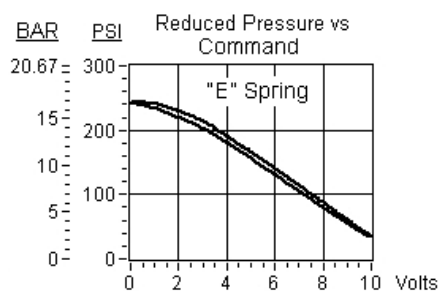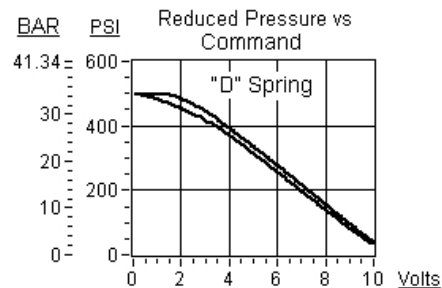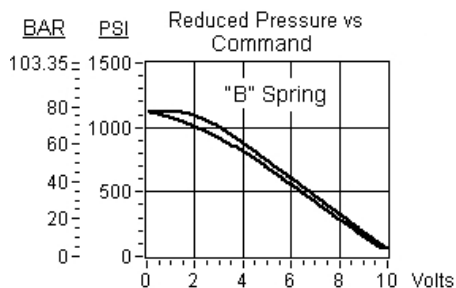

PRDM-XDN-***

Control	Adjustment Range	Seal Material	Coil
Standard Options	Standard Options	Standard Options	*** See Coil Options Below
X* No Manual Override	B 1000 - 400 psi (28 - 70 bar) D 400 - 200 psi (14 - 28 bar) E 200 - 100 psi (7 - 14 bar) S 100 - 10 psi (0,7 - 7 bar)	N Buna-N V Viton	

Standard Coil Options

					
AMP Junior Timer	Deutsch DT04-2P	DIN 43650 4 pin (Hirschman)	Metri-Pack	SAE J858A	Twin Lead

*** no coil

212 DIN 43650 4 pin
(Hirschman) 12 VDC224 DIN 43650 4 pin
(Hirschman) 24 VDC

524 SAE J858A 24 VDC

612 AMP Junior Timer 12 VDC

624 AMP Junior Timer 24 VDC

712 Twin Lead 12 VDC

724 Twin Lead 24 VDC

812 Metri-Pack 12 VDC

824 Metri-Pack 24 VDC

912 Deutsch DT04-2P 12 VDC

924 Deutsch DT04-2P 24 VDC

Embedded Coil Options ([Click Here](#))

2B12A	DIN 43650 4 pin (Hirschman) command common on fourth pin 12 VDC 0-20 mA	2C24V	DIN 43650 4 pin (Hirschman) +5V reference on fourth pin 24 VDC 0-10V	4A12A	Deutsch DT04-6P all functions enabled (separate command common, 5 v reference, and an enable) 12 VDC 0-20 mA
2B12V	DIN 43650 4 pin (Hirschman) command common on fourth pin 12 VDC 0-10V	2D12A	DIN 43650 4 pin (Hirschman) enable input on fourth pin 12 VDC 0-20 mA	4A12V	Deutsch DT04-6P all functions enabled (separate command common, 5 v reference, and an enable) 12 VDC 0-10V
2B24A	DIN 43650 4 pin (Hirschman) command common on fourth pin 24 VDC 0-20 mA	2D12V	DIN 43650 4 pin (Hirschman) enable input on fourth pin 12 VDC 0-10V	4A24A	Deutsch DT04-6P all functions enabled (separate command common, 5 v reference, and an enable) 24 VDC 0-20 mA
2B24V	DIN 43650 4 pin (Hirschman) command common on fourth pin 24 VDC 0-10V	2D24A	DIN 43650 4 pin (Hirschman) enable input on fourth pin 24 VDC 0-20 mA	4A24V	Deutsch DT04-6P all functions enabled (separate command common, 5 v reference, and an enable) 24 VDC 0-10V
2C12A	DIN 43650 4 pin (Hirschman) +5V reference on fourth pin 12 VDC 0-20 mA	2D24V	DIN 43650 4 pin (Hirschman) enable input on fourth pin 24 VDC 0-10V	4F12V	Deutsch DT04-6P programmable ramps, separate rise and fall 12 VDC 0-10V
2C12V	DIN 43650 4 pin (Hirschman) +5V reference on fourth pin 12 VDC 0-10V	2F12V	DIN 43650 4 pin (Hirschman) programmable ramps, separate rise and fall 12 VDC 0-10V	4F24V	Deutsch DT04-6P programmable ramps, separate rise and fall 24 VDC 0-10V
2C24A	DIN 43650 4 pin (Hirschman) +5V reference on fourth pin 24 VDC 0-20 mA	2F24V	DIN 43650 4 pin (Hirschman) programmable ramps, separate rise and fall 24 VDC 0-10V		

Additional Options ([Click Here](#))

Additional Coils

512 SAE J858A 12 VDC

* Special Setting required, specify at time of order