





## Direct-acting, pressure reducing/relieving valve

Capacity:  
40 gpm (160 L/min.)

Model:  
PRHB

### Product Description

Direct-acting, pressure reducing/relieving valves reduce a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, with a full-flow relief function from port 1 to tank (port 3). These valves incorporate a damped construction for stable operation allowing the use of high reduced pressure.

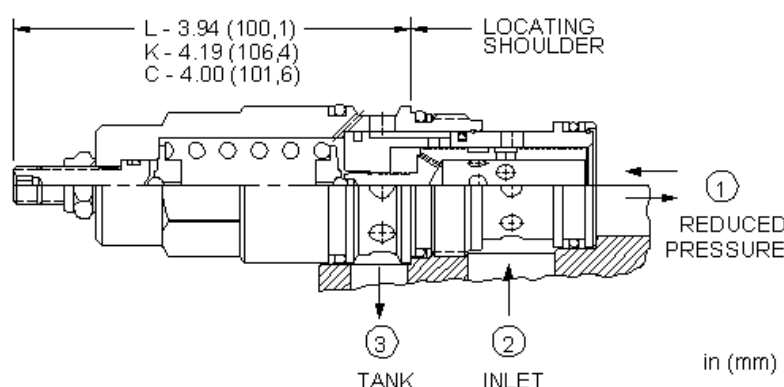



### Technical Features

- Pressure at port 3 is directly additive to the valve setting at a 1:1 ratio and should not exceed 3000 psi (210 bar).
- Leakage specified in Technical Data is out of port 3 with a supply pressure of 2000 psi (140 bar) and the valve set at mid range. This leakage is directly proportional to pressure differential and inversely proportional to viscosity expressed in centistokes.
- All three-port pressure reducing and reducing/relieving cartridges are physically interchangeable (i.e. same flow path, same cavity for a given frame size). When considering mounting configurations, it is sometimes recommended that a full capacity return line (port 3) be used with reducing/relieving cartridges.
- Full reverse flow from reduced pressure (port 1) to inlet (port 2) may cause the main spool to close. If reverse free flow is required in the circuit, consider adding a separate check valve to the circuit.
- All spring ranges are tested for correct operation with 5000 psi (350 bar) inlet pressure.
- Suitable for accumulator circuits since the absence of pilot control flow results in reduced secondary circuit leakage.
- Direct acting concept provides highly reliable operation in contaminated systems, especially at dead headed conditions.
- Unlike pilot operated versions, direct acting valves exhibit a transitional step between reducing and relieving modes. This step equals 5% of the high end of the adjustment range, independent of the valve setting. Therefore, these valves may not be suitable for counterbalancing applications.
- Direct operated version offers superior dynamic response compared to equivalent pilot operated models.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

### Technical Data

|                                           | U.S. Units                         | Metric Units |
|-------------------------------------------|------------------------------------|--------------|
| Cavity                                    | T-17A                              |              |
| Capacity                                  | 40 gpm                             | 160 L/min.   |
| Factory Pressure Settings Established at  | blocked control port (dead headed) |              |
| Maximum Operating Pressure                | 5000 psi                           | 350 bar      |
| Maximum Valve Leakage at 110 SUS (24 cSt) | 4 in <sup>3</sup> /min.            | 65 cc/min.   |
| Series (from Cavity)                      | Series 3                           |              |

|                                                            |                    |              |
|------------------------------------------------------------|--------------------|--------------|
| Adjustment - Number of Clockwise Turns to Increase Setting | 5                  |              |
| Valve Hex Size                                             | 1 1/4 in.          | 31,8 mm      |
| Valve Installation Torque                                  | 150 - 160 lbf ft   | 200 - 215 Nm |
| Adjustment Screw Internal Hex Size                         | 5/32 in.           | 4 mm         |
| Adjustment Locknut/Cap Hex Size                            | 9/16 in.           | 15 mm        |
| Adjustment Nut Torque                                      | 80 - 90 lbf in.    | 9 - 10 Nm    |
| Seal Kits - Cartridge                                      | Buna: 990-017-007  |              |
| Seal Kits - Cartridge                                      | Viton: 990-017-006 |              |
| Model Weight                                               | 1.54 lb.           | 0.70 kg.     |

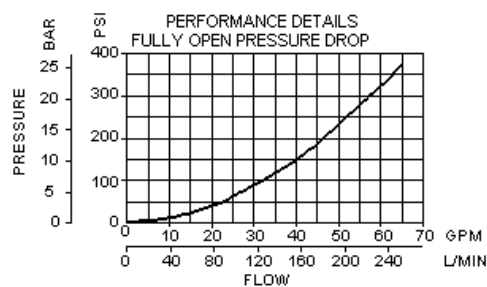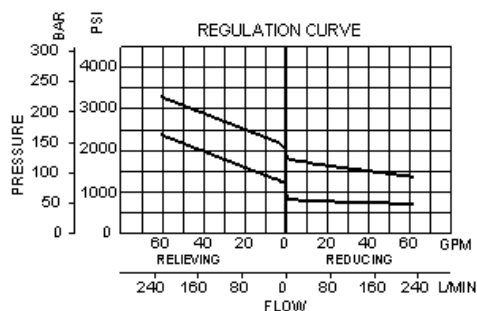

## PRHB-LAN

| Control                                         | Adjustment Range                                                                                                                                                                                                                                                                                           | Seal Material                | Material/Coating Modifier                                                                                                                                       |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Preferred Options                               | Preferred Options                                                                                                                                                                                                                                                                                          | Preferred Options            | Preferred Options                                                                                                                                               |
| L Standard Screw Adjustment<br>Standard Options | A 750 - 3000 psi (50 - 210 bar),<br>1000 psi (70 bar) Standard<br>Setting                                                                                                                                                                                                                                  | N Buna-N<br>Standard Options | No modifier (standard material<br>with no special coating)<br>Special Options                                                                                   |
| C* Tamper Resistant - Factory<br>Set            | Standard Options                                                                                                                                                                                                                                                                                           | V Viton                      | /AP Stainless Steel, Passivated                                                                                                                                 |
| K Handknob                                      | B 300 - 1500 psi (20 - 105 bar),<br>500 psi (35 bar) Standard<br>Setting<br><br>D 200 - 800 psi (14 - 55 bar),<br>400 psi (28 bar) Standard<br>Setting<br><br>E 100 - 400 psi (7 - 28 bar), 200<br>psi (14 bar) Standard Setting<br><br>S 50 - 200 psi (3,5 - 14 bar), 100<br>psi (7 bar) Standard Setting |                              | Control:C<br>Control:L                                                                                                                                          |
|                                                 |                                                                                                                                                                                                                                                                                                            |                              | <i>Our stainless product line is<br/>growing! If you are interested in<br/>a stainless option for this model<br/>which is not shown please<br/>contact Sun.</i> |

When the modifier is /AP, the control must be C or L

\* Special Setting required, specify at time of order  
Customer specified setting stamped on hex.