



Pilot operated, pressure reducing/relieving valve with drain to port 4

Capacity:
10 gpm (40 L/min.)

Functional Group:

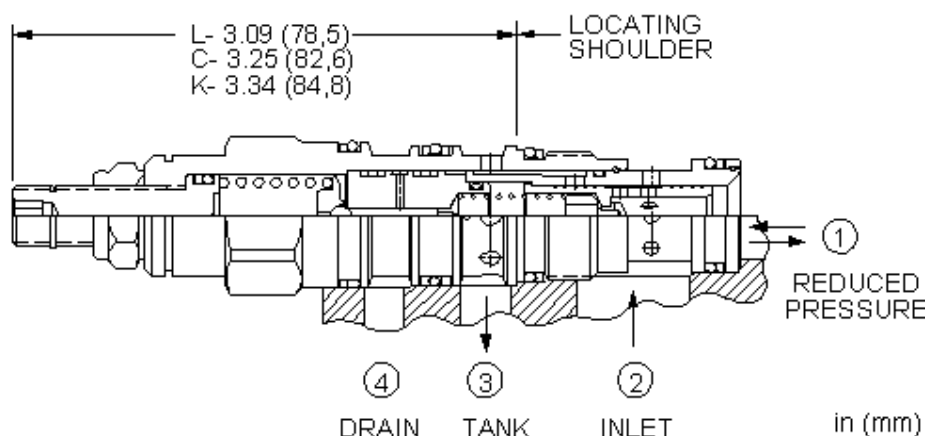

Products : Cartridges : Reducing/Relieving : 4 Port : Pilot Operated, Externally Drained

Model:

PVDA

Product Description

Externally drained, pilot-operated pressure reducing/relieving valves reduce a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, with a full-flow relief function from port 1 to tank (port 3). Draining the pilot section at port 4 makes these valves insensitive to pressure at tank (port 3) and provides a means for remote control by pilot or 2-way valves.



Technical Features

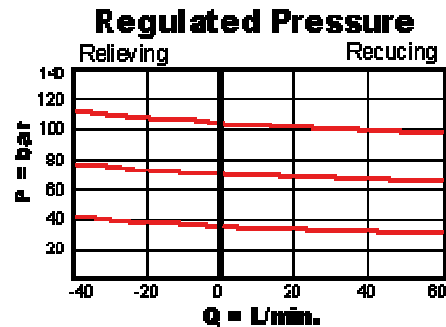
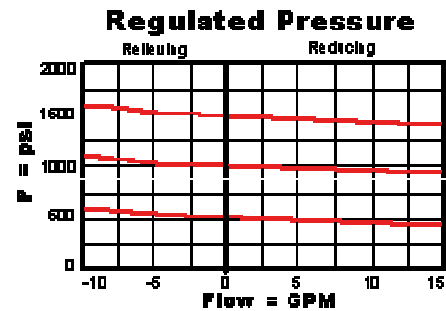
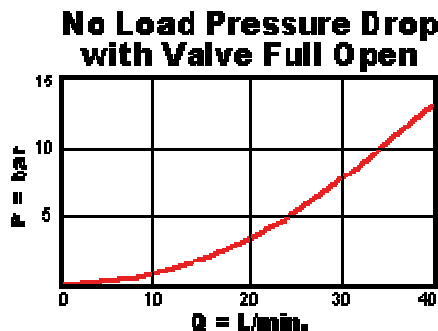
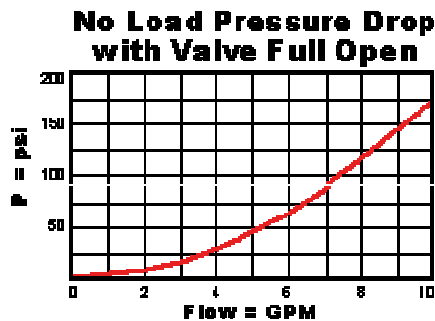
- Maximum pressure at port 3 should be limited to 3000 psi (210 bar).
- Full reverse flow from reduced pressure (port 1) to inlet (port 2) may cause the main spool to close. If reverse free flow is required in the circuit, consider adding a separate check valve to the circuit.
- Pilot operated valves exhibit very low dead-band transition between reducing and relieving modes.
- Recommended maximum inlet pressure is determined by the adjustment range. Ranges D, E, N, and Q are tested with a 2000 psi (140 bar) maximum differential between inlet and reduced pressure. Ranges A, B, and H are tested with a 3000 psi (210 bar) maximum differential between inlet and reduced pressure. Ranges C and W are tested with 5000 psi (350 bar) of inlet pressure.
- Pressure at port 4 should not exceed 5000 psi (350 bar).
- Pilot operated valves exhibit exceptionally flat pressure/flow characteristics, are very stable and have low hysteresis.
- Pressure on the drain (port 4) is directly additive to the valve setting at a 1:1 ratio and should not exceed 5000 psi (350 bar).
- Pilot operated reducing, reducing/relieving valves by nature are not fast acting valves. For superior dynamic response, consider direct acting valves.
- By controlling the pressure at the drain (port 4), the effective setting of the valve can be increased over the nominal valve setting.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Special Notes

- Maximum pressure differentials for spring ranges: A and B are 3000 psi (210 bar) D and E are 2000 psi (140 bar) W is 5000 psi (350 bar) inlet pressure

Technical Data

	U.S. Units	Metric Units
Cavity	T-21A	
Capacity	10 gpm	40 L/min.
Control Pilot Flow	7 - 10 in ³ /min.	0,11 - 0,16 L/min.
Factory Pressure Settings Established at	blocked control port (dead headed)	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 1	
Adjustment - Number of Clockwise Turns to Increase Setting	5	
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	40 - 50 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm
Seal Kits - Cartridge	Buna: 990-021-007	
Seal Kits - Cartridge	Viton: 990-021-006	
Model Weight	0.41 lb.	0.19 kg.

**PVDA-LAN****Control****Standard Options**

- C*** Tamper Resistant - Factory Set
K Handknob
L Standard Screw Adjustment

Adjustment Range**Standard Options**

- A** 100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting
B 50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting
D 25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting
E 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting
W 150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar) Standard Setting

Seal Material**Standard Options**

- N** Buna-N
V Viton

Adjustment Range**Seal Material**

W*	Max. Setting Limiter	H	30 - 3000 psi (2 - 210 bar), 200 psi (14 bar) Standard Setting
		J	25 - 1500 psi (1,7 - 105 bar), 200 psi (14 bar) Standard Setting
		N	60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting
		Q	60 - 400 psi (4 - 28 bar), 200 psi (14 bar) Standard Setting

When the control is 8, the range must be D or W

* Special Setting required, specify at time of order
Customer specified setting stamped on hex