





Pilot operated, balanced piston sequence valve

Capacity:
60 gpm (240 L/min.)

Model:
RSHC

Product Description

Pilot-operated, balanced piston sequence valves will supply a secondary circuit with flow once the pressure at the inlet (port 1) has exceeded the valve setting. The pressure setting of a sequence valve controls the pressure at port 1 relative to the pressure at the drain (port 3). These valves are insensitive to back pressure at port 2 (sequence), up to the valve setting. They may be used to regulate pressure in place of 2-port relief valves if there is pressure in the return line.

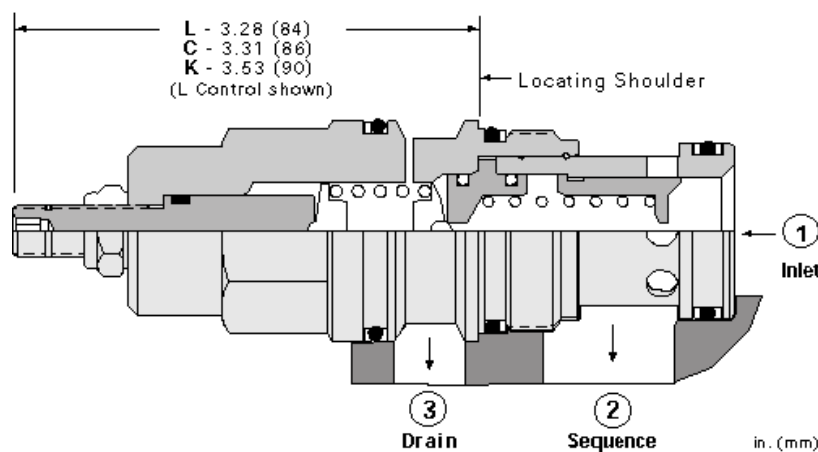





Technical Features

- Pressure at port 3 is directly additive to the valve setting at a 1:1 ratio and should not exceed 5000 psi (350 bar).
- The main stage orifice is protected by a 150 micron stainless steel screen.
- Pilot flow continues to increase as the pressure at port 1 (inlet), relative to the pressure at port 3 (drain), rises above the valve setting.
- All 3 port sequence cartridges are physically and functionally interchangeable (i.e. same flow path, same cavity for a given frame size).
- Not suitable for use in load holding applications due to spool leakage.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-17A	
Capacity	60 gpm	240 L/min.
Factory Pressure Settings Established at	4 gpm	15 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	4 in ³ /min.@1000 psi	65 cc/min.@70 bar
Response Time - Typical	10 ms	
Series (from Cavity)	Series 3	
Adjustment - Number of Clockwise Turns to Increase Setting	5	
Valve Hex Size	1 1/4 in.	31,8 mm
Valve Installation Torque	150 - 160 lbf ft	200 - 215 Nm

Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm
Seal Kits - Cartridge	Buna: 990-017-007	
Seal Kits - Cartridge	Viton: 990-017-006	
Model Weight	1.36 lb.	0.62 kg.

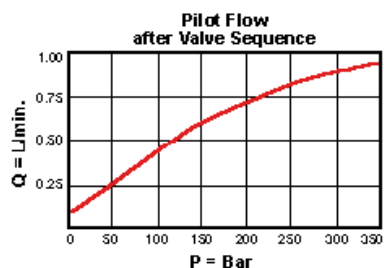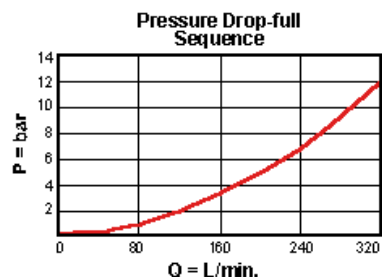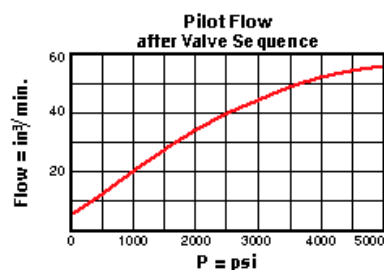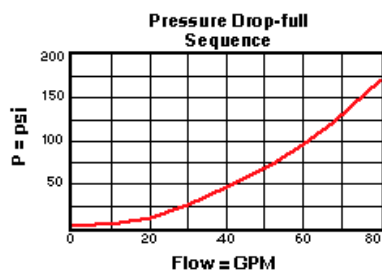

RSHC-LAN

Control	Adjustment Range	Seal Material
Preferred Options	Preferred Options	Preferred Options
L Standard Screw Adjustment	A 100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting	N Buna-N
Standard Options		Standard Options
C* Tamper Resistant - Factory Set	W 150 - 4500 psi (10,5 - 315 bar), 1000 psi (70 bar) Standard Setting	V Viton
K Handknob	Standard Options	
	B 50 - 1500 psi (3,5 - 105 bar), 1000 psi (70 bar) Standard Setting	
	C 150 - 6000 psi (10,5 - 420 bar), 1000 psi (70 bar) Standard Setting	
	D 25 - 800 psi (1,7 - 55 bar), 400 psi (28 bar) Standard Setting	
	E 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting	
	N 60 - 800 psi (4 - 55 bar), 400 psi (28 bar) Standard Setting	

Additional Options

Control	Adjustment Range	Seal Material
Q* Capped and Lockwired		

* Special Setting required, specify at time of order
Customer specified setting stamped on hex.