





All ports blocked cavity plug

Capacity:

Model:
XJCA

Product Description
This cavity plug blocks all ports.

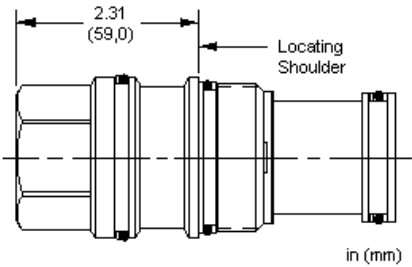

Technical Features

- Corrosion resistant cavity plugs are intended for use in corrosive environments and are identified by the model code suffix /AP (see Option Selection below). The bodies of these plugs are made from high strength lean duplex stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard plugs.

Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm
Seal Kits - Cartridge	Buna: 990-019-007	
Seal Kits - Cartridge	Viton: 990-019-006	
Model Weight	2.06 lb.	0.93 kg.

XJCA-XXN

Control	Adjustment Range	Seal Material	Material/Coating Modifier
Standard Options	Standard Options	Standard Options	Preferred Options
X -	X -	N Buna-N V Viton	No modifier (standard material with no special coating) Special Options

/ AP Stainless Steel, Passivated

Control:X

Our stainless product line is growing! If you are interested in a stainless option for this model which is not shown please contact Sun.

When the modifier is /AP, the control must be X

| | | | |

Copyright © 2009-2010 Sun Hydraulics Corporation. All rights reserved.
[Terms and Conditions](#) - [ISO Certification](#) - [Statement of Privacy](#)