





All ports open cavity plug

Capacity:

Model:
XKOA

Product Description

These cavity plugs can be used for both two-port and four-port cavities and allow all ports to remain connected.

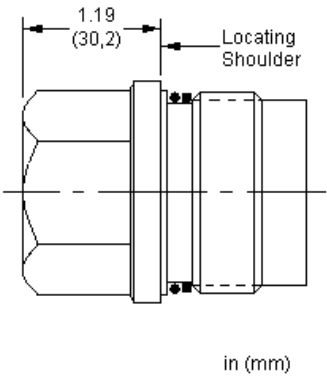

Technical Features

- Corrosion resistant cavity plugs are intended for use in corrosive environments and are identified by the model code suffix /AP (see Option Selection below). The bodies of these plugs are made from high strength lean duplex stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard plugs.

Technical Data

	U.S. Units	Metric Units
Cavity	T-18A & T-34A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm
Seal Kits - Cartridge	Buna: 990-018-007	
Seal Kits - Cartridge	Viton: 990-018-006	
Model Weight	1.28 lb.	0.58 kg.

XKOA-XXN

Control		Adjustment Range		Seal Material		Material/Coating Modifier
Standard Options		Standard Options		Standard Options		Preferred Options
X	-	X	-	N	Buna-N	No modifier (standard material with no special coating)
				V	Viton	Special Options
						/ AP Stainless Steel, Passivated
						Control:X
						Our stainless product line is growing! If you are interested in a stainless option for this model which is not shown please contact Sun.

When the modifier is /AP, the control must be X