





Ports 3 and 4 or port 5 and 6 blocked, all other ports open cavity plug

Capacity:

Model:
XNOA

Product Description

These cavity plugs can be used for both four-port and six-port cavities. When used in four-port cavities (T-21A, T-22A, T-23A and T-24A), ports 1 and 2 remain connected and ports 3 and 4 are blocked. When used in six-port cavities (T-61A, T-62A, T-63A and T-64A), ports 1, 2, 3 and 4 remain connected and ports 5 and 6 are blocked.

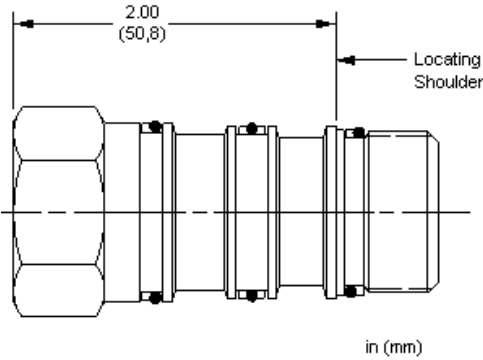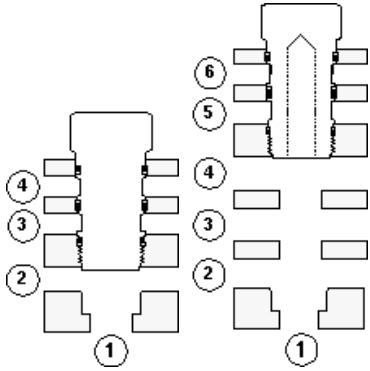

Technical Features

Technical Data

	U.S. Units	Metric Units
Cavity	T-22A & T-62A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 2	
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Seal Kits - Cartridge	Buna: 990-022-007	
Seal Kits - Cartridge	Viton: 990-022-006	
Model Weight	0.42 lb.	0.19 kg.

XNOA-XXN

Control		Adjustment Range		Seal Material	
Standard Options		Standard Options		Standard Options	
X	-	X	-	N	Buna-N
				V	Viton