


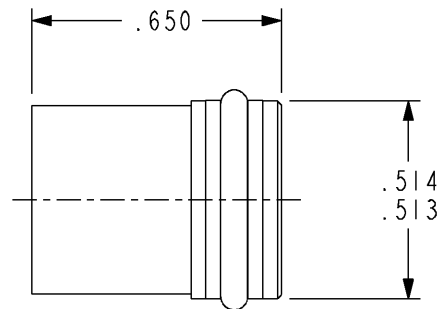

INSTALLATION NOTE:
 INSERT BUSHING INTO T-162A CAVITY,
 THEN INSERT T-8A CARTRIDGE AND TORQUE IN PLACE.

							TITLE OUTLINE-CAVITY ADAPTER SUN T-162A TO SUN T-8A			REV.	PART NO. XZCA 8X*	
	DIMENSION TOL .XX = ± .015 .XXX = ± .005 MACHINING STANDARD S-180 ANGLE TOL ± 1° FINISH 80 ✓ REMOVE ALL BURRS .005 MAX. BREAK						SCALE 2:1	REF.		MATERIAL		
							DRAWN DAS	CHECK	RELEASE	HEAT TREAT & FINISH		
							DATE 26APR05	DATE	DATE			
	REVISION	DATE	DRN	CHK	REL							