

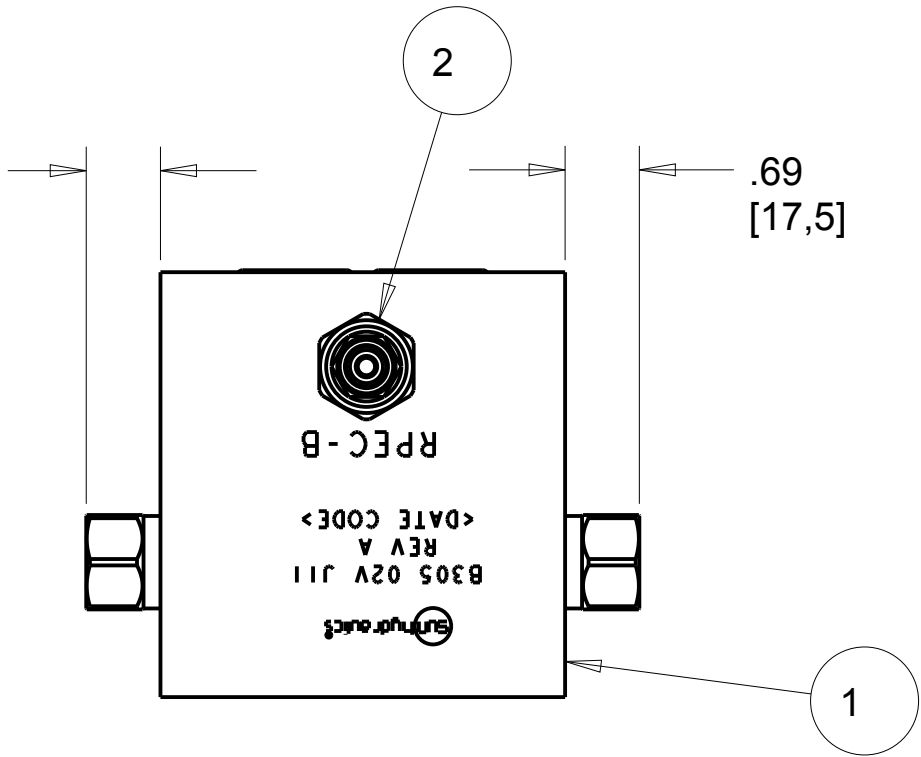
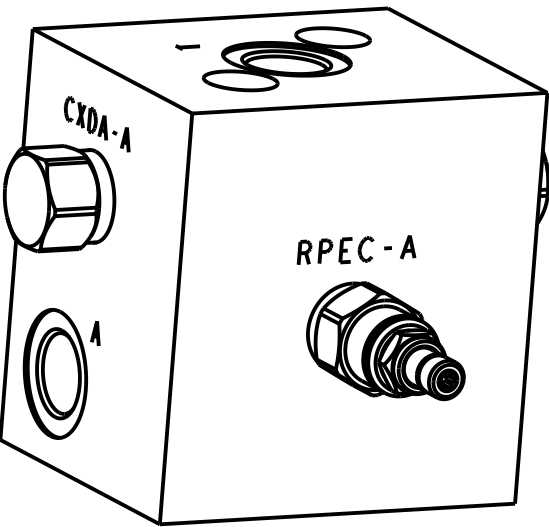
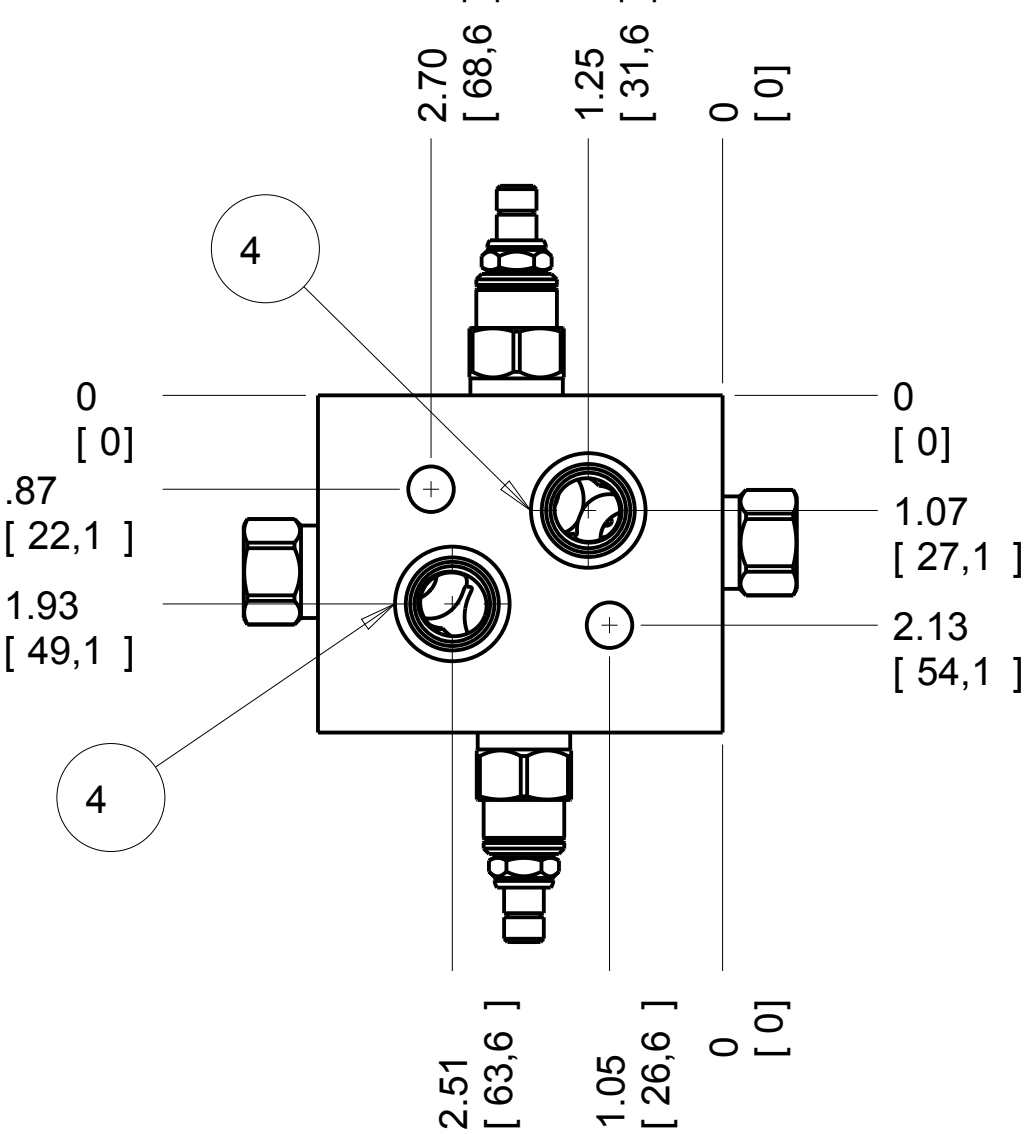
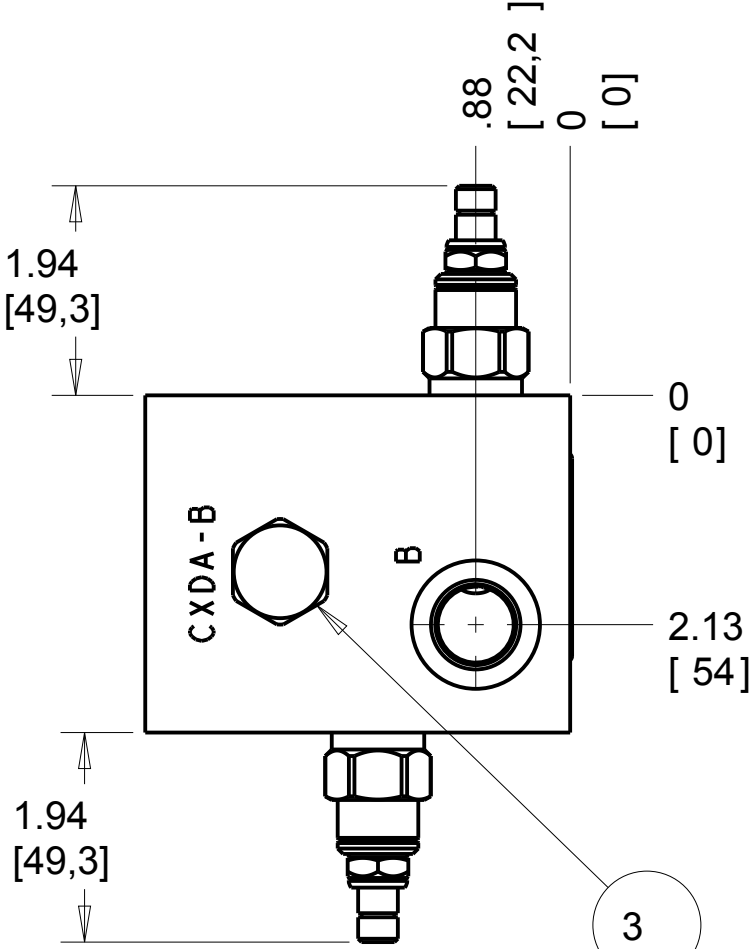




REFER TO SUN HYDRAULICS
TECHNICAL LITERATURE AND CATALOGUE
FOR DETAILS OF CARTRIDGE STANDARD
SETTINGS, ADJUSTMENT RANGES,
MAXIMUM PRESSURE RATINGS,
SEAL MATERIAL, TORQUE VALUES, ETC.

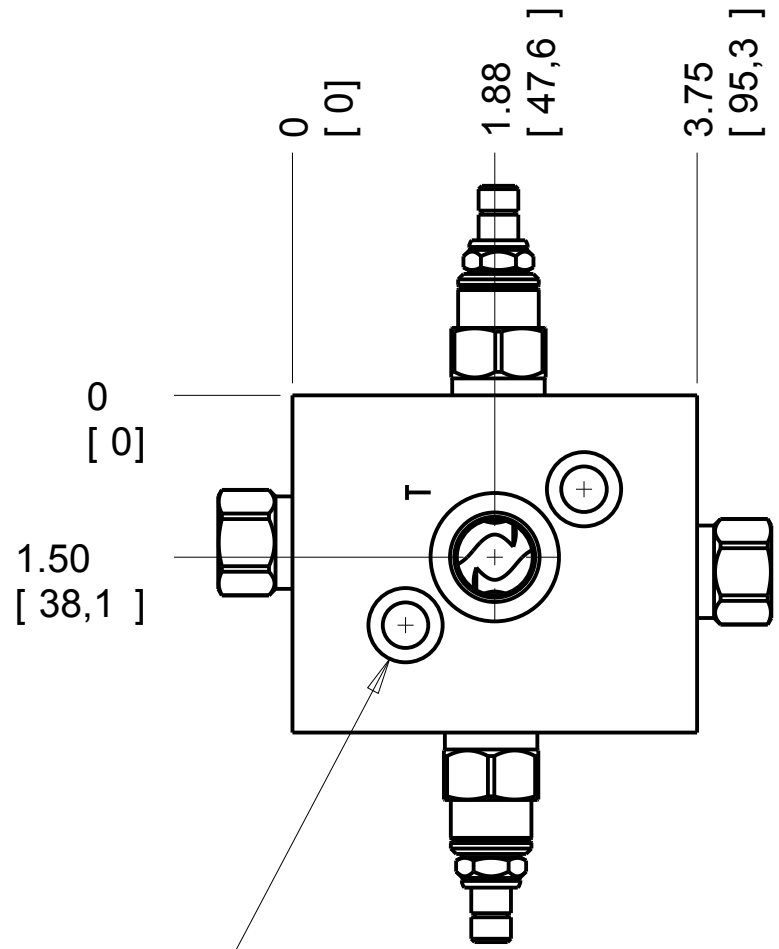

ENGINEERING VALIDATION REQUIRED
1. AFTER STAMPING
2. AFTER MANIFOLD FINISH

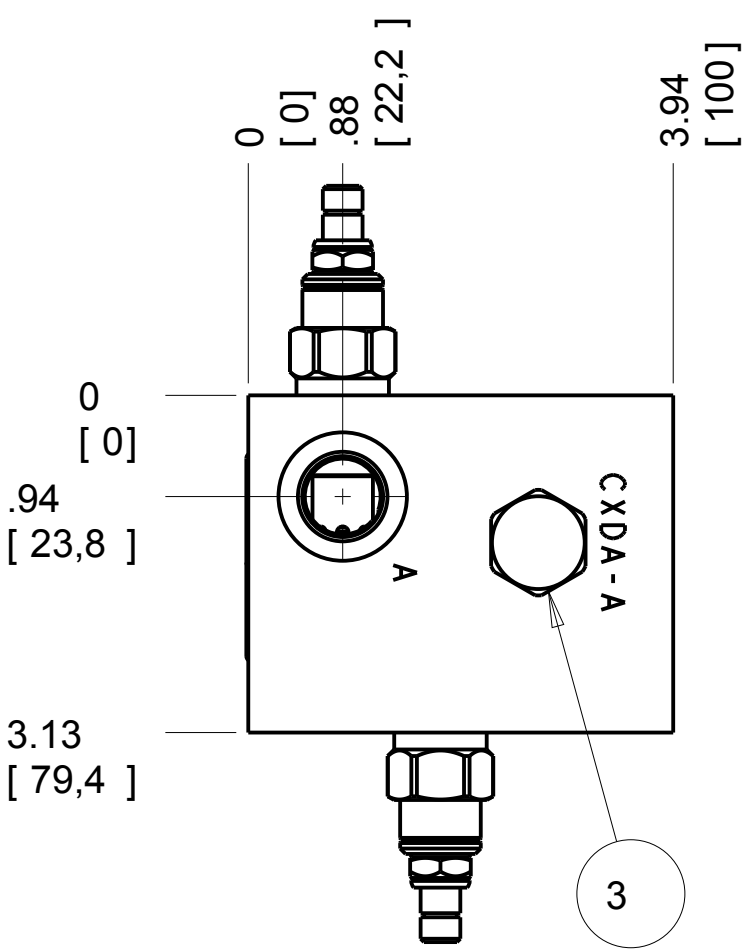

.42(10.7) DIA. THRU
CBORE .69(17.5) DIA.x .44(11.1) DEEP
TYP (2) PLACES

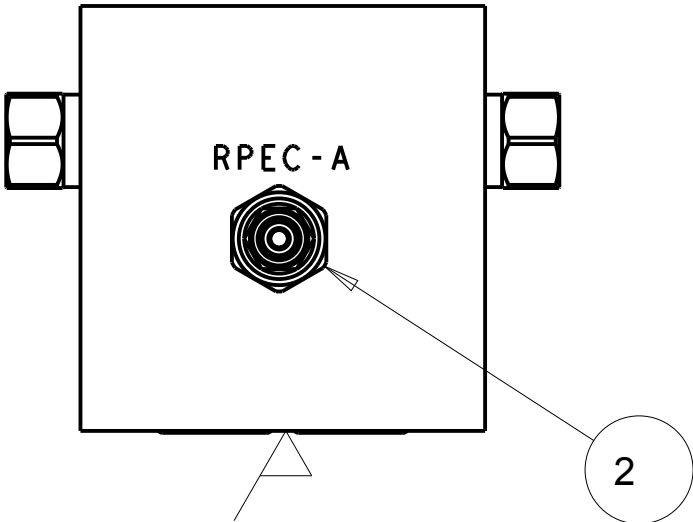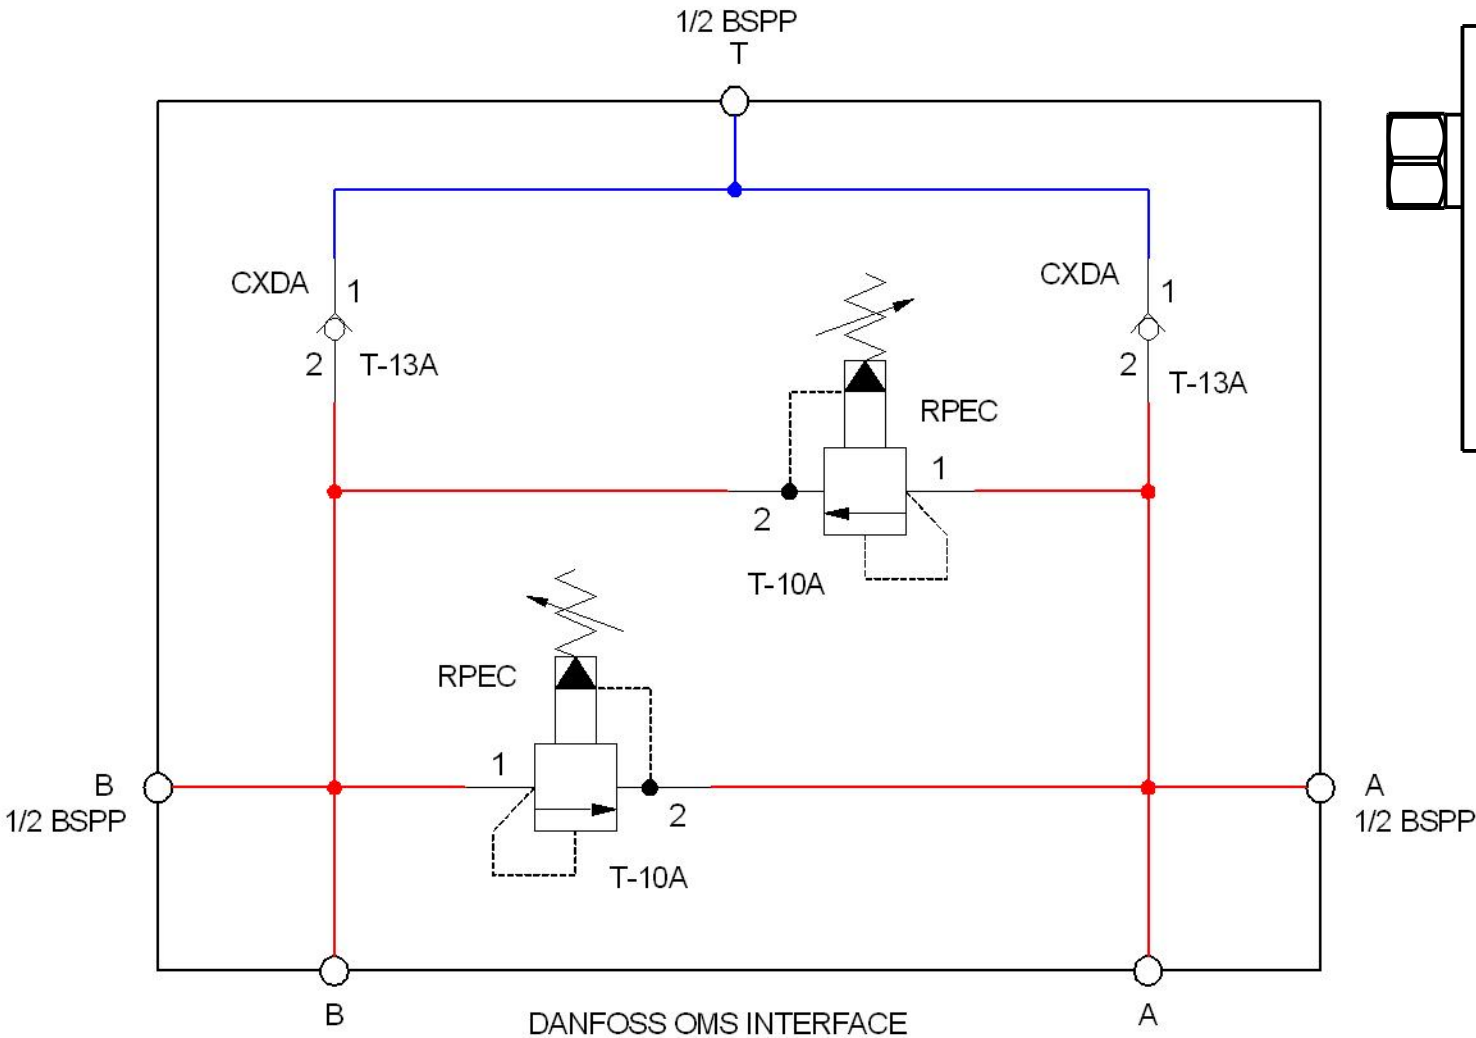

4	500-001-118		BUNA-N	O-RING SEAL	2
3	CXDA-XAN			CHECK VALVE	2
2	RPEC-LAN			RELIEF VALVE	2
1	177-652		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY

TITLE DANFOSS OMS MOTOR DIRECT MOUNT DUAL RELIEF AND CHECK		REV A	PART NO. B305-02V-J11
SCALE 0.562	REF HYDNET AB EQ206386	MATERIAL SEE BOM	
DRAWN MS	CHECK MJ	RELEASE UK04701	HEAT TREAT & FINISH NONE
DATE 02MAY13	DATE 22MAY13	DATE 25JUL13	
INITIAL RELEASE		MS	
REVISION		DATE	DRN/CHK/REL
PRO/E			

WHEELER ROAD, WHITLEY,
COVENTRY, CV3 4LA ENGLAND
TELEPHONE (024) 7621 7400