
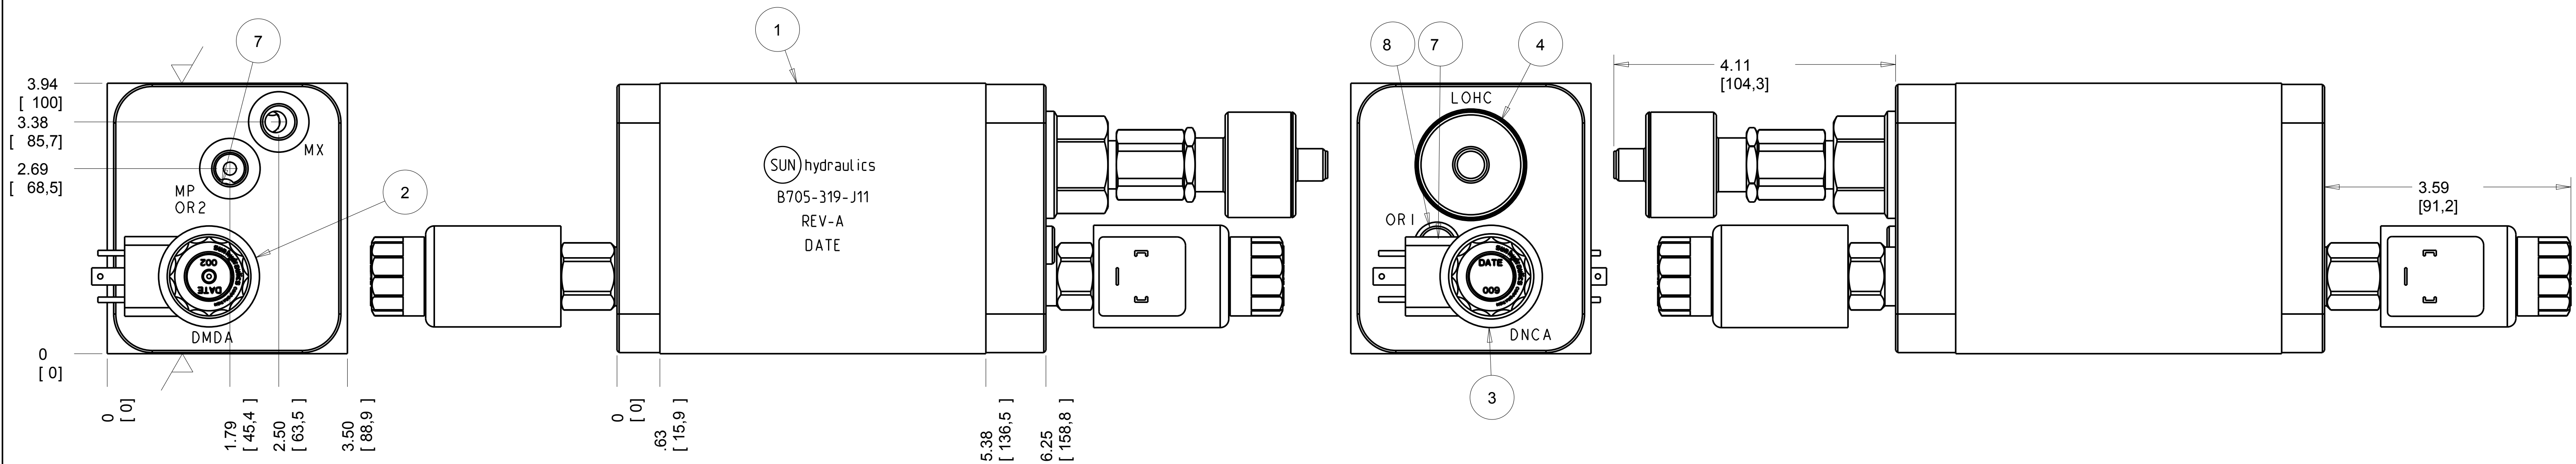
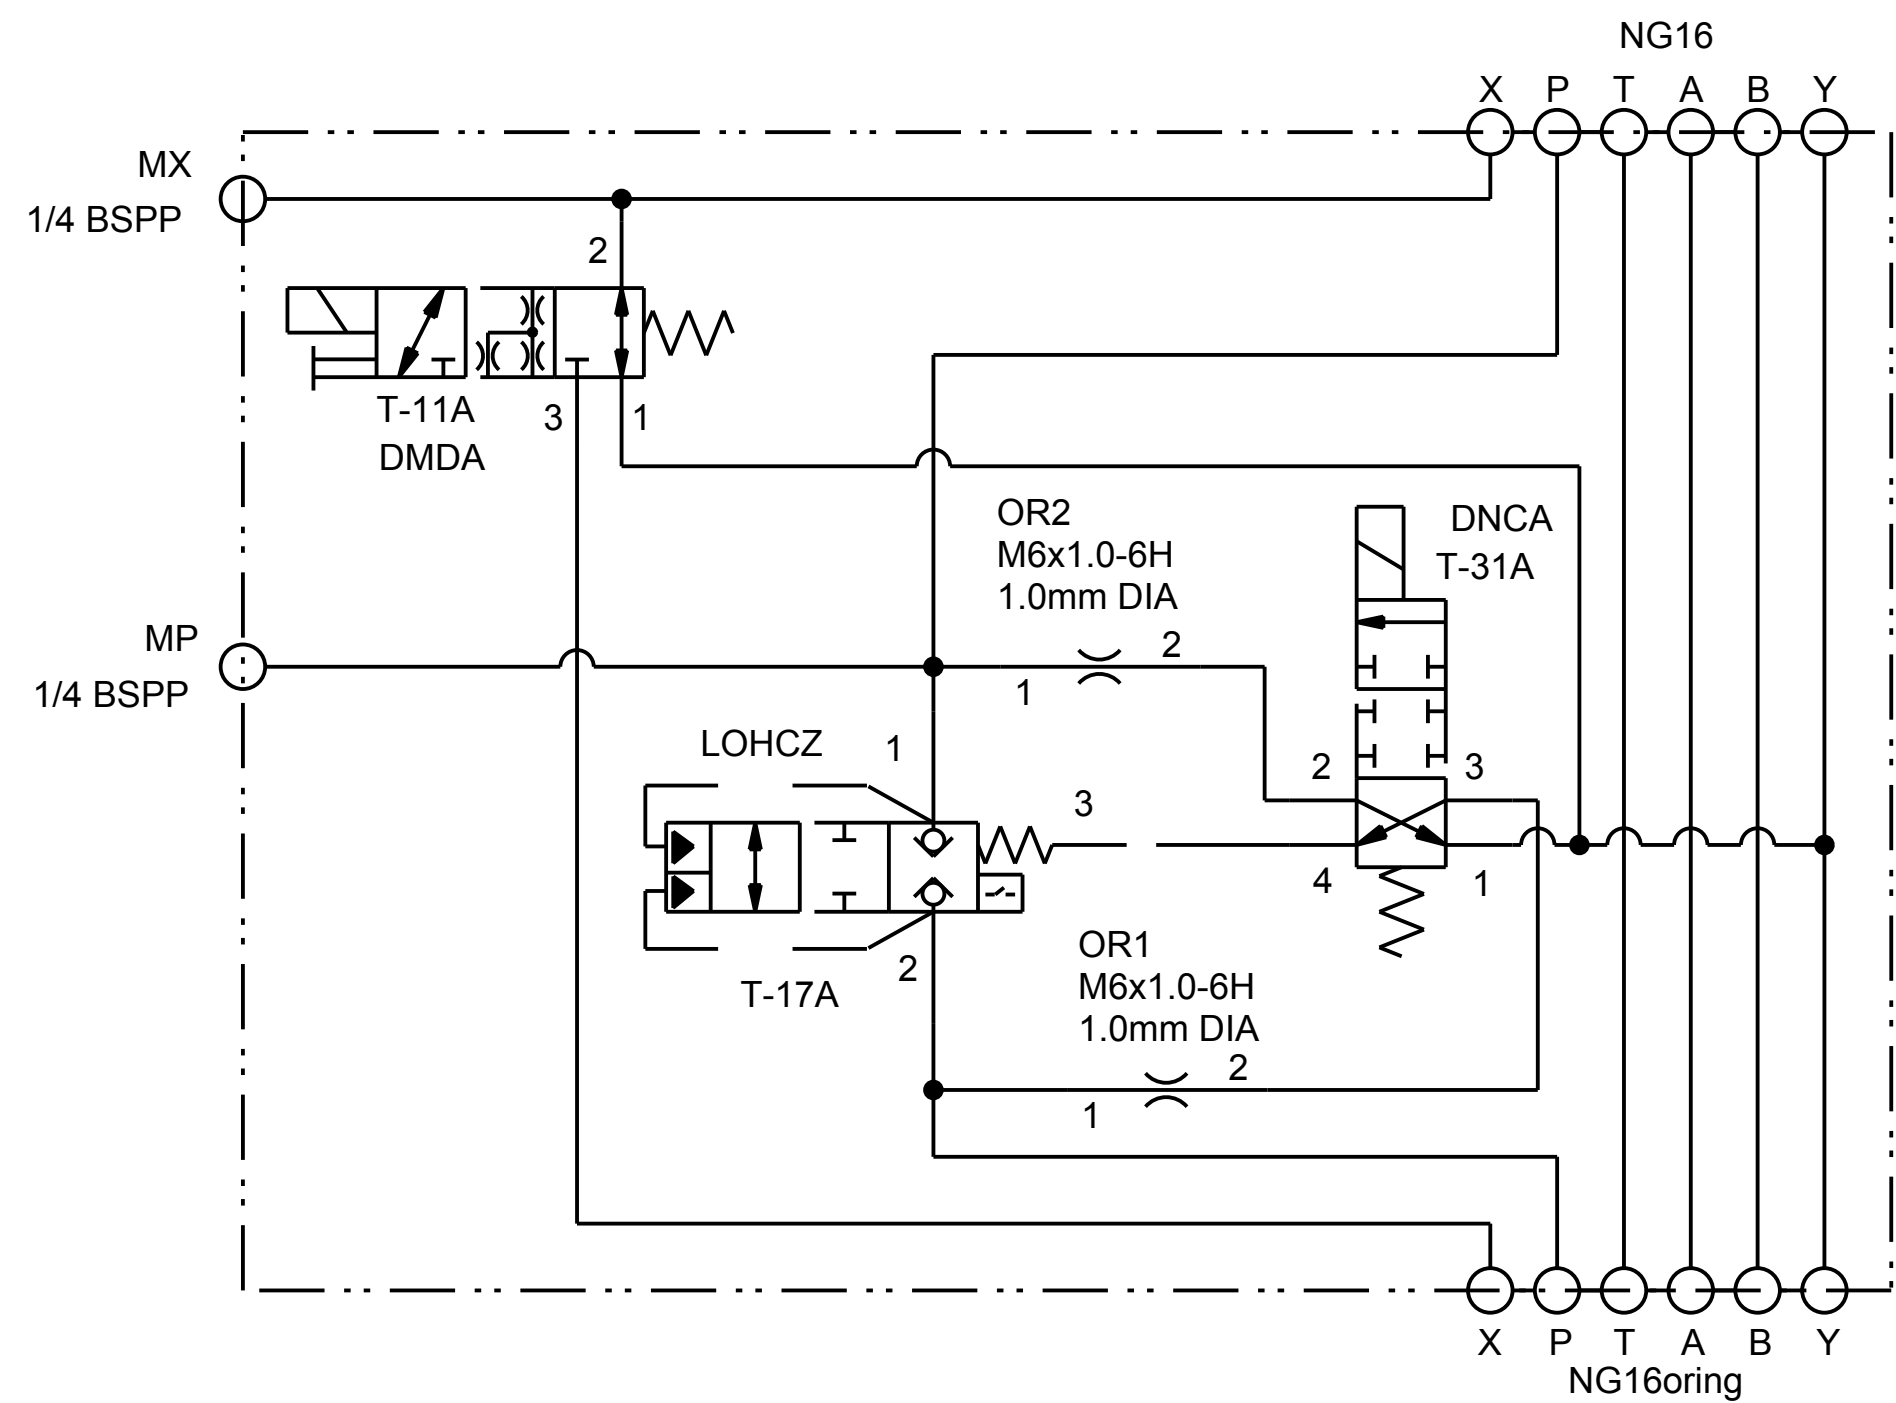


REFER TO SUN HYDRAULICS
TECHNICAL LITERATURE AND CATALOGUE
FOR DETAILS OF CARTRIDGE STANDARD
SETTINGS, ADJUSTMENT RANGES,
MAXIMUM PRESSURE RATINGS,
SEAL MATERIAL, TORQUE VALUES, ETC.

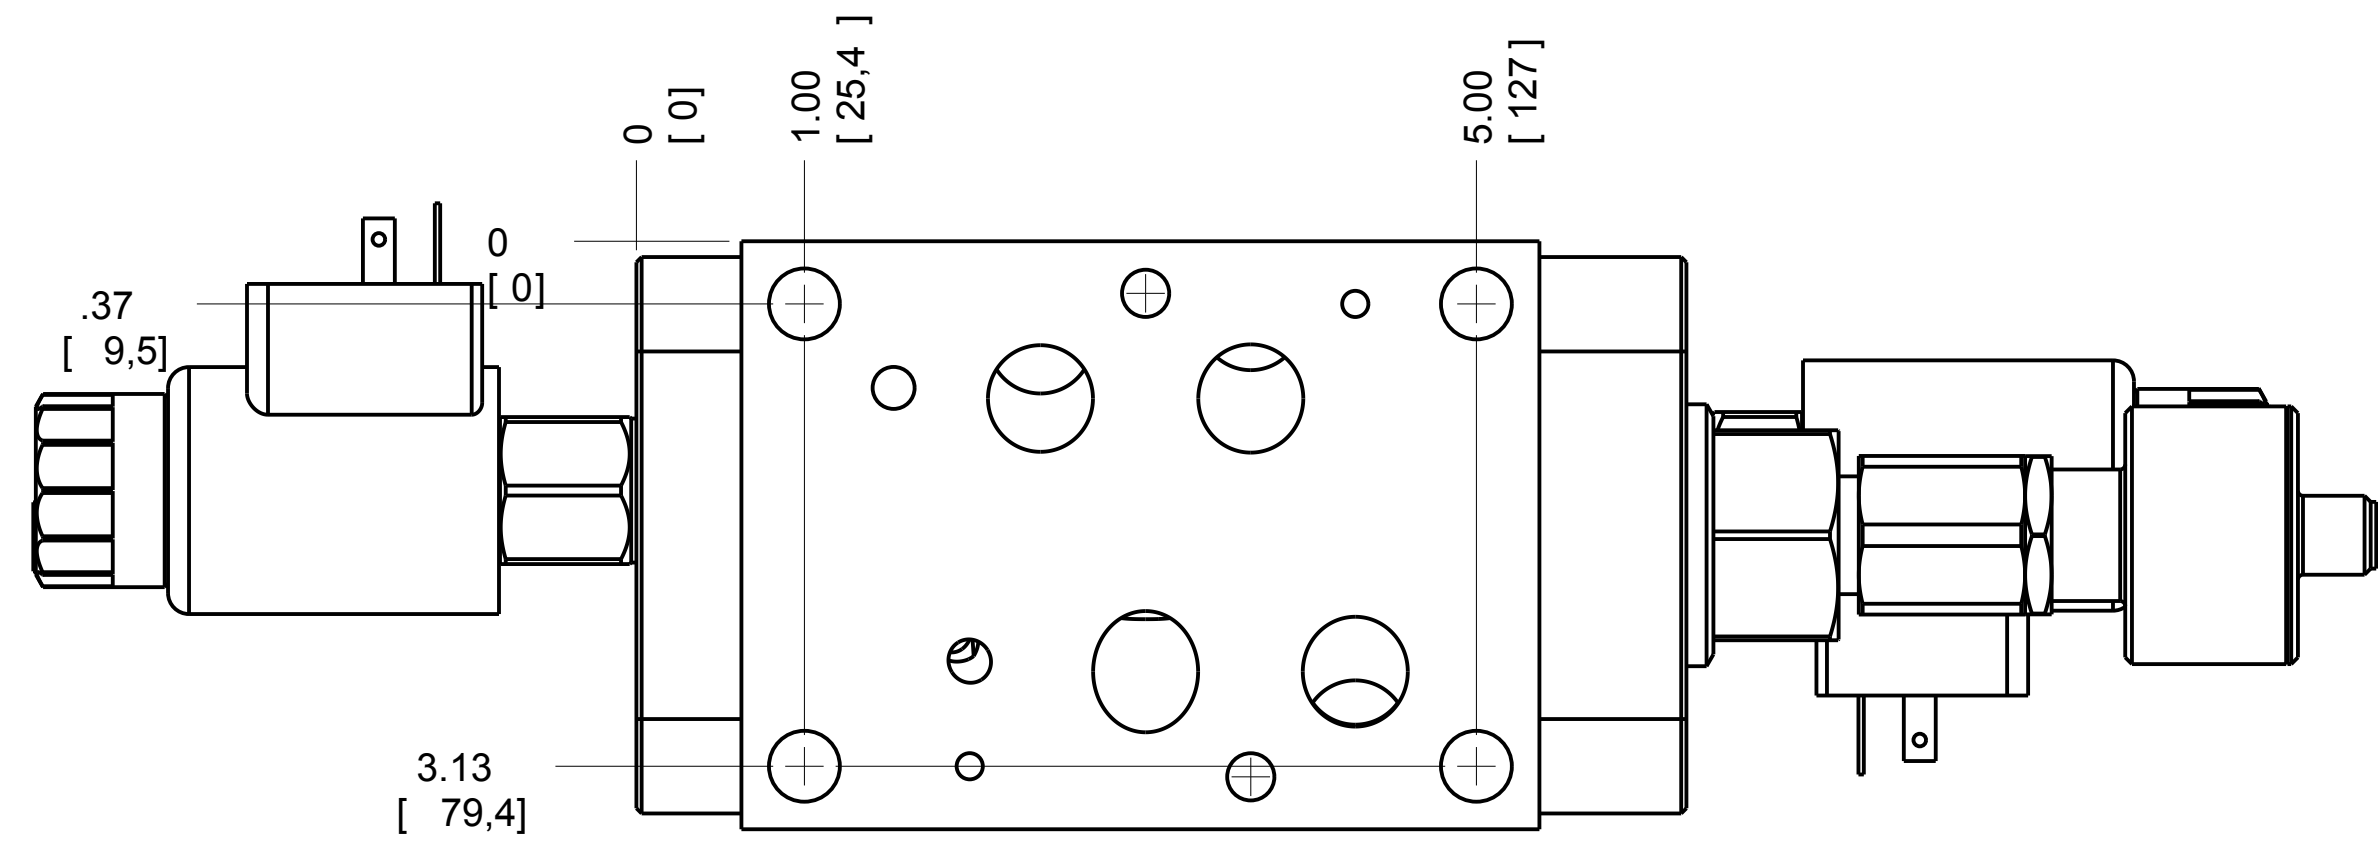

NOTES:
1) MANIFOLD COATING: DEWATERING OIL (S-247-000)
2) MOUNTING HOLES
4 OFF .42[10.7] DIA THROUGH
2 OFF .28[7.1] DIA THROUGH

8	330-018-001			.125 BSPP PLUG	1
7	280-050-007			M6 ORIFICE PLUG	2
6	500-001-118		NITRILE	1.06 OD NOM ORING	4
5	500-001-111		NITRILE	.62 OD NOM ORING	2
4	LOHC-ZDN			LOGIC VALVE	1
3	DNCA-XLN-224			SOL. OP. DIR. VALVE	1
2	DMDA-MAN-224			SOL. OP. DIR. VALVE	1
1	17D-940		DUCTILE IRON UK	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY

							TITLE				REV	PART NO.	
							ISO 07 LOGIC SLICE				A	B705-319-J11	
					DIMENSION TOL XX ± .015 XXX ± .005 ANGLE TOL ± ° FINISH B ✓ REMOVE ALL BURRS .005 MAX. BREAK		SCALE	REF.	MATERIAL				
							0.875	HYDNET	SEE PARTS LIST				
							DRAWN	CHECK	RELEASE				HEAT TREAT & FINISH
							MJ	***	4001498				
							DATE	DATE	DATE	SEE NOTES			
							23AUG17	***	***				
A	INITIAL RELEASE				MJ								
LET	REVISION				DATE	DRN	CHK	REL					