
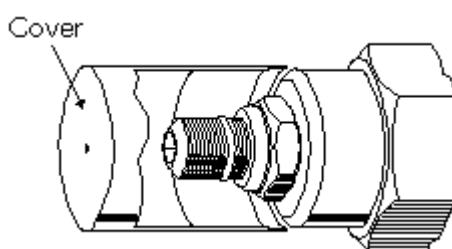


Tamper resistant cover, cartridge control kit

Model:
991-003

Sun's tamper resistant cover is a zinc plated steel cover which press-fits onto the L Control cartridge shoulder. Valves may be ordered in this configuration from Sun by specifying a C control in the model number. The pressure setting must be specified at the time of the order and the setting will be stamped on the cartridge hex. Sun kits for replacement parts or field conversion are available.



Technical Features

- For use on all Sun cartridges with an L control.
- The tamper resistant cover is designed to be a non-removable item. Once removed, it can not be re-assembled to the cartridge.

Technical Data

	U.S. Units	Metric Units
Cartridge Models	CAIA, CAIG, CAIK, CAIL, CBHA, CBHG, CBIA, CBIB, CBIG, CBIH, CBIL, CBIY, CCIA, CWIA, CWIG, CWIK, CWIL, DKJP, DOJP, FCFB, FRFA, PBJB, PBJF, PPJB, PPJF, PRJB, PRJR, PVJA, PVJB, PVJC, PVJD, RDJA, RPKC, RPKE, RPKS, RPKT, RQKB, RSJS, RVIA, RVID, RVIS, RVIT, SCIA, SQJB	
Cover inside diameter	1.56 in.	39,6 mm
For Cartridge Models	Series 4	
Material	Zinc Plated Steel	
Overall Height	1.75 in.	44,5 mm
Title	Tamper Resistant Cover Kit - All Models	
Valve Hex Size	1 5/8 in.	41,3 mm
Model Weight	0.13 lb.	0.06 kg.

991-003**Display Components**

	Description	Quantity
270-004	Cap	1
999-270-004	Literature	1

Instructions/Notes

- Adjust valve to desired setting and tighten locknut.
- Using an arbor press or a soft hammer, install cover until it seats on cartridge hex (press fit).
- Press fit required between cartridge shoulder and cover.