


Series 4 - T-24A cavity, Viton, cartridge seal kit

Model:
990-024-006

Sun offers replacement seal kits for all cartridge models. These kits include all of the external seals on the cartridge along with installation instructions. Seal kits are available in both Buna-N and Viton. Please note: Converting the external seals from one material to another does not ensure fluid compatibility with that material due to the existence of internal seals within the cartridge.

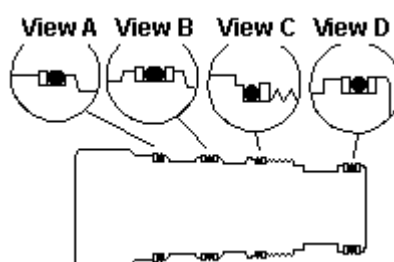

Technical Features

- The shelf life for this cartridge seal kit is twenty years from date of purchase. This date will be printed on the kit packaging.

Cartridge Installation Data

	U.S. Units	Metric Units
Cavity	T-24A	
Cartridge Thread	M48	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm

990-024-006

What models can this kit be used on?

	CWIL	DOJP	FKHB	MWIA	MWIGX	PVJB	RVID
CVIV	DKJP	DOJR	FKIA	MWIA X	MWIM	PVJC	RVID8
CWIA	DKJR	DOJR8	FKIB	MWIB	PSJT	PVJC8	XQCA
CWIG	DKJR8	DOJS	FVFA	MWIBX	PVJA	PVJD	XQOA
CWIK	DKJS	FKHA	FVFA8	MWIG	PVJA8	PVJH	XQOC

Display Components

	Description	Quantity	View
500-101-127	O-Ring	1	D
500-101-134	O-Ring	2	A,B
500-102-131	O-Ring	1	C
515-102-127	Backup Ring	2	D
515-102-131	Backup Ring	1	C
515-102-134	Backup Ring	3	A,B
999-019-056	Literature	1	

Instructions/Notes

- Install back-up rings and O-rings as shown in views.
 - When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
 - When installing cartridge - be sure to torque to recommended value.
-
-