



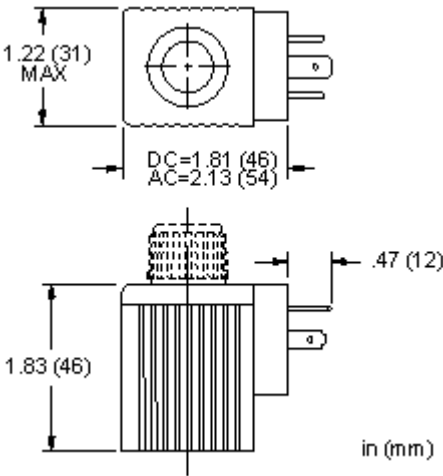

48 VDC ISO/DIN 43650, Form A coil

Model:
760-248



Technical Features

- Coil windings utilize Class H, (356 °F [180 °C] rated) magnet wire.
- A metal oxide varistor, SIOV-S07K35, for surge suppression is molded directly into the coil to protect the connected electrical circuits from inductive transients.
- The coil is magnetically symmetrical and can be mounted in either direction on the solenoid tube without affecting performance.
- Power cable with mating connector is required and is not included with product.

Technical Data

	U.S. Units	Metric Units
Arc Suppression	Standard	
Maximum Coil Temperature at 68°F (20°C) Ambient	218°F (105°C)	
Operating Voltage Range	+/- 10% nominal	

Power Consumption (cold) - at rated voltage	12 watts	
Title	ISO/DIN 43650 Connector	
Voltage/Frequency	48 VDC	
Coil Nut Torque	4.5 lbf in.	0,5 Nm
Model Weight	0.32 lb.	0.15 kg.

760-248

What models can this kit be used on?

DAAA DAAC DACC DACD DBAA DBAC

